

# QUBO MEDIUM HP


The Qubo Medium HP is a square, outdoor LED floodlight suitable for installation on a façade/wall with a U-shaped fixing bracket allowing vertical adjustment of +90° / -40°. It has 3 standard finishes and 3 optics options.



## TECHNICAL DATA

<b>Wattage / Input</b>	20W (120VAC)
<b>Power Supply</b>	Integral 0-10V Dimming
<b>Construction</b>	Body: Die-Cast Copper-Free Aluminum Screws: Stainless Steel Lens: Tempered, Safety Glass Cable Length: 3.28" included
<b>CCT</b>	3000K, 4000K
<b>CRI</b>	>80
<b>Lumen Output</b>	2000 lm (3000K, 10°)
<b>Efficacy</b>	100 lm/W (3000K, 10°)
<b>Optics</b>	3 Standard (see below)
<b>Finishes</b>	3 Standard, Custom RAL (see below)
<b>Fixture Dimensions</b>	5.51" l x 5.51" w x 7.87" h
<b>Fixture Weight</b>	6.83 lbs
<b>LED Source</b>	3 x CREE "XHP35" LED
<b>IP Rating</b>	IP66
<b>Impact Rating</b>	IK10

Fixture Dimensions

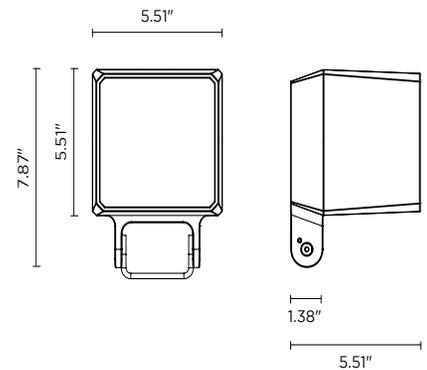

## ORDERING INFORMATION

Example: 101606P-30K-10-TG. Accessories ordered separately.

101606P	-		-		-	
Model No.	CCT	Optics	Finish			
101606P	30K - 3000K 40K - 4000K	04 - 4° 10 - 10° 28 - 28°	TG - Textured Grey (RAL 9006) AG - Anthracite Grey (RAL 7016) MB - Matte Black (on request)			

Job Name/Date:

Fixture Type Designation:


## ACCESSORIES

### Installation



**AC044**  
Ground Spike

### Anti-Glare



**AC073**  
Honeycomb Louver



**AC077**  
Anti-Glare Visor




**AC038**  
Tree Strap  
for Ring Series

## PHOTOMETRIC DATA


Note: All photometry is 3000K

Maximum Candela = 23800.1

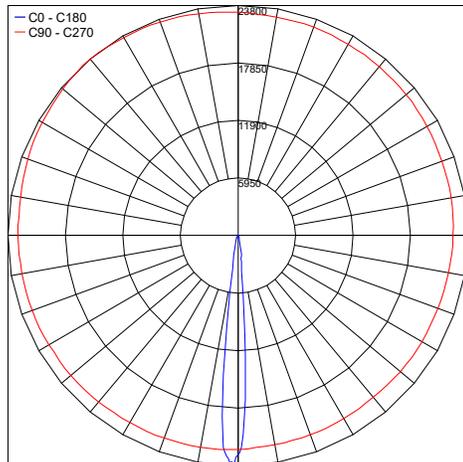


PHOTOMETRIC FILENAME : QUBO MEDIUM HP 3000K 4\" 20W 101606P.IES

Maximum Candela = 12340

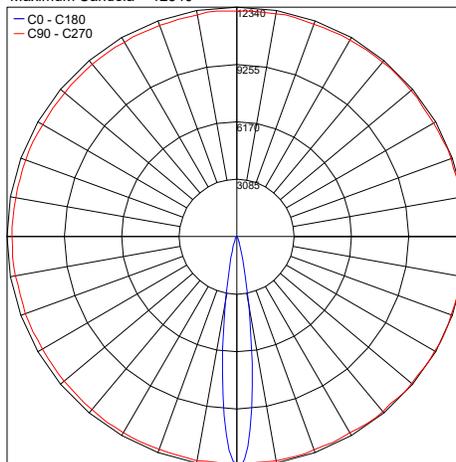

PHOTOMETRIC FILENAME : QUBO MEDIUM HP 3000K 10\" 20W 101606P.IES

Maximum Candela = 6507.4

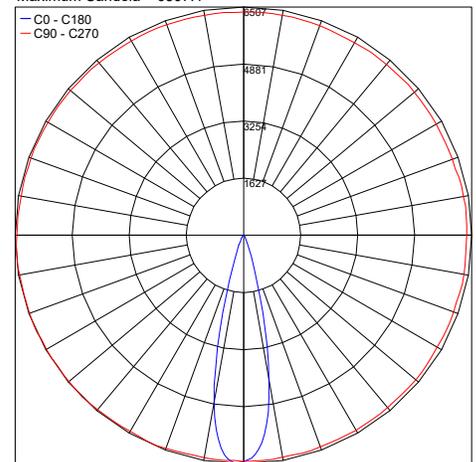

PHOTOMETRIC FILENAME : QUBO MEDIUM HP 3000K 28\" 20W 101606P.IES

Job Name/Date:

Fixture Type Designation: