

QUBY IP20

INDOOR

Fix (not adjustable) 0° - 0°

5.20" × 5.20"

Material : CALCYT® plaster and frosted diffuser

QUBY LED DIM 100 LM

REF N° 126 60 500 CRI 80 warm white 2200°K

REF N° 126 60 000 CRI 90 warm white 2700°K

REF N° 126 60 100 CRI 90 warm white 3000°K

REF N° 126 60 200 CRI 90 neutral white 4000°K

REF N° 126 60 300 royal blue

1W - excl. LED driver - current
controlled 350mA - 

Ⓟ - serial wiring - 3 Step MacAdam
Requires remote LED driver - 350mA

QUBY LED DIM 200 LM

REF N° 126 62 500 CRI 80 warm white 2200°K

REF N° 126 62 000 CRI 90 warm white 2700°K

REF N° 126 62 100 CRI 90 warm white 3000°K

REF N° 126 62 200 CRI 90 neutral white 4000°K

REF N° 126 62 300 royal blue

2W - excl. LED driver - current
controlled 350mA - 

Ⓟ - serial wiring - 3 Step MacAdam
Requires remote LED driver - 350mA

QUBY LED DIM 400 LM

REF N° 126 61 500 CRI 80 warm white 2200°K

REF N° 126 61 000 CRI 90 warm white 2700°K



REF N° 126 61 100 CRI 90 warm white 3000°K

REF N° 126 61 200 CRI 90 neutral white 4000°K

REF N° 126 61 300 royal blue

4W - excl. LED driver - current
controlled 350mA - 

Ⓟ - serial wiring - 3 Step MacAdam
Requires remote LED driver - 350mA

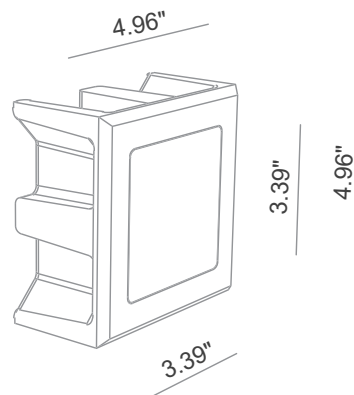


2.52"

Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT QUBY

REF N° 725 01 000 For mounting into gypsum walls

Housing: perforated aluminum



designplan® 

79 Trenton Avenue
Frenchtown, NJ 08825

Tel: (908) 996-7710
Fax: (908) 996-7042