

QUBY IP54

OUTDOOR


Quby is a recessed wall luminaire made of Calcyt® plaster that can be used as orientation lighting. The fixture has a trimless opaline cover that sits flush with the wall and the absence of a metal frame makes the fixture especially elegant. It is available as indoor (IP20), bathroom or outdoor (IP54) versions in 5 color temperatures.

TECHNICAL DATA

Wattage / Input	1W, 2W, 4W (350mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: CALCYT® plaster Lens: Frosted diffuser
CCT	2200K, 2700K, 3000K, 4000K, Royal Blue
CRI	>90 and >80
Delivered Lumens	42 lm (1W, 3000K)
Efficacy	42 lm/W
Optics	Fixed
Finishes	Paintable Plaster
Fixture Dimensions	4.96" l x 2.52" w x 4.96" h
Cut-out Dimension	5.20" x 5.20"
Aperature	3.39" x 3.39"
Color Consistency	3-Step MacAdam
IP Rating	IP54



Ceiling Cut-Out: 5.20" x 5.20"
Fixture Dimensions

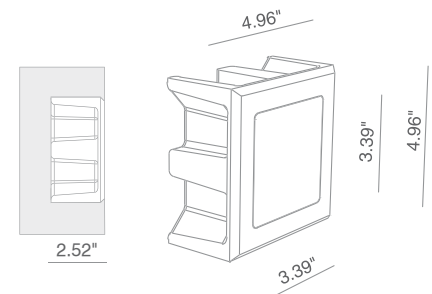

ORDERING INFORMATION

Example: 126 60 205. Accessories / Power Supplies ordered separately.

Model No.	Description	Model No.	Description
126 60 505 - 2200K	1W, 100 lm, CRI 80, IP54 Outdoor	126 61 505 - 2200K	4W, 400 lm, CRI 80, IP54 Outdoor
126 60 005 - 2700K	1W, 100 lm, CRI 90, IP54 Outdoor	126 61 005 - 2700K	4W, 400 lm, CRI 90, IP54 Outdoor
126 60 105 - 3000K	1W, 100 lm, CRI 90, IP54 Outdoor	126 61 105 - 3000K	4W, 400 lm, CRI 90, IP54 Outdoor
126 60 205 - 4000K	1W, 100 lm, CRI 90, IP54 Outdoor	126 61 205 - 4000K	4W, 400 lm, CRI 90, IP54 Outdoor
126 60 305 - Royal Blue	1W, 100 lm, IP54 Outdoor	126 61 305 - Royal Blue	4W, 400 lm, IP54 Outdoor
126 62 505 - 2200K	2W, 200 lm, CRI 80, IP54 Outdoor		
126 62 005 - 2700K	2W, 200 lm, CRI 90, IP54 Outdoor		
126 62 105 - 3000K	2W, 200 lm, CRI 90, IP54 Outdoor		
126 62 205 - 4000K	2W, 200 lm, CRI 90, IP54 Outdoor		
126 62 305 - Royal Blue	2W, 200 lm, IP54 Outdoor		

Job Name/Date:

Fixture Type Designation:

QUBY IP54

OUTDOOR

SUGGESTED POWER SUPPLIES

350mA


Part Number	Description	Input/Output	# of Fixtures		
			1W	2W	4W
PPLT00138	0-10V Dimming to 10%	120-277VAC to 350mA, 4W, Class 2	2-3	1-1	N/A
PPLT00468	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	4-12	2-6	1-3
PPLT00308-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 30W, Class 2	1-16	1-9	1-4
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 50W, Class 2	1-16	1-9	1-4
PPLT00538-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-68	1-40	1-16

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures		
						1W	2W	4W
PPLT00247	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driv.	120-277VAC to 350mA, 7W, Class 2	4-5	2-3	1-1
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driv.	120-277VAC to 350mA, 13W, Class 2	6-11	3-6	2-3
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driv.	120-277VAC to 350mA, 19W, Class 2	12-16	6-9	3-4

For other power supply options consult factory.

ACCESSORIES - Installation




725 01 000
Outer Casing

PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 14.9

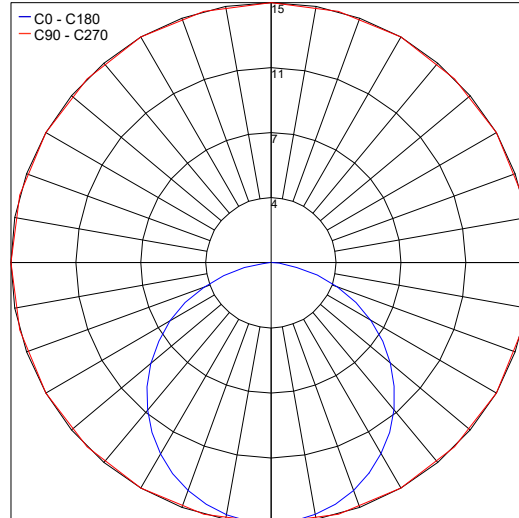

Job Name/Date:

Fixture Type Designation: