




101408RGBWP

## RING MEGA DMX RGBW

Designed by  
NAVA + AROSIO

Floodlight for outdoor installation on a façade/wall, with 355° swivel base and allowing horizontal adjustment of +90° / -40°. Phospho-chromatized and polyester powder coated die-cast copper-free aluminum base and head, tempered safety glass, molded silicone gaskets and o-rings, with screws in stainless steel. Swivel joint with graduated scale and mechanical aiming lock. Built-in LED driver, DMX driver integrated; with 12 x CREE "XML" RGBW LED. IP66 rating.



### Technical features

IP66 IK10 5 YEARS DMX

NEW


### Technical data

Wattage	56W
IP Rating	IP66
IK Rating	IK10
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	12 x CREE "XML" LED
Screws	Stainless steel
Transformer	Electrical power supply Built-in
Gasket	Silicone rubber
Glass	Tempered
Power cable	3.28' power cable included
DMX cable	DMX in & DMX out cables included
Gross weight	17.6 lbs

AC103  
SPIKE



AC087  
HONEYCOMB  
LOUVER



AC086  
ANTI-GLARE  
VISOR




AC038  
TREE STRAP  
FOR RING SERIES



### AC089 - TREE-BRANCH BRACKET

Special bracket for Ring Mega pole mounting, suitable to be used with poles diam. min 2.99" and diam. max 4.72". Can be positioned on various staggered levels or on a single level, with the same pole. Made in phospho-chromatised and polyester powder coated dia-cast copper-free aluminum material, moulded silicone gaskets and screws in stainless steel.

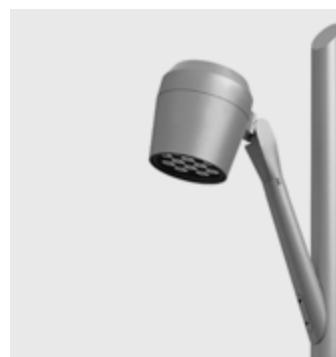

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>RGBW</b>			
high-power led	12°	2,000	35.71
high-power led	25°	1,984	35.43
high-power led	35°	1,962	35.04

### Finish color options:

 Textured Grey  
RAL 9006

 Anthracite Grey  
RAL 7016

 Matt Black  
(on request)