

RXTR Downlight

The RXTR is a vandal resistant, IP65 wet label downlight, suitable for steam rooms, that is IC and Chicago Plenum rated with tunable white light as well as RGBW and 2 optic options.

TECHNICAL DATA

Wattage / Input	25W (24VDC)
Power Supply	Remote, not included. See page 3.
Color Changing / Tunable	Controlled by DMX Controller (by others) or Araya app
Construction	Body: 20 Ga. Cold Rolled Steel (Powder Black Finish) Neck: Die Cast Aluminum Lens: Clear Tempered Glass
CCT	1650K - 8000K, RGBW
BUG Rating	B1-U1-G0 (22°)
CRI	>90
Delivered Lumens	770 lm
Efficacy	30.8 lm/W
Optics	25°, 45°
Finishes	5 Standard, plus 4 Marine Grade. See Below.
Fixture Dimensions	Ø5.6" x 12.6" l x 8.6" h (see drawing on page 2)
Fixture Weight	9.2 lbs
LED Source	Araya LED Module
Lumen Maintenance	L70>50,000hrs (Ta 25°C)
Color Consistency	2 Step MacAdam
IP Rating	IP65



MADE IN THE U.S.A.

Fixture Dimensions
(see drawing on page 2)

ORDERING INFORMATION


Example: RXTR-L25-RW-25-4-M02-C-RMT-4.

RXTR-L25	-	RW	-		-		-	RMT	-	
Model #	CCT	Optics	Body	Finish	Lens	Dimming	Options			
RXTR-L25	RW - RGBW+ Tunable White (1650K-8000K)	25 - 25° 45 - 45°	4 - Fully Recessed IC Rated C - Fully Recessed Chicago Plenum	11 - White Suede 02 - Black Suede 18 - Tex. Bronze TS - Silver Add prefix “M” to above colors for Marine Grade Clear Overcoat PN - Polished Nickel Marine Grade Clear Overcoat NOT available on Polished Nickel	C - Clear X - Opal	RMT - Remote Required (See page 3 for power supply options)	0 - None 4 - One Circuit Fusing 8 - Special Screws (Please specify) H - Honeycomb Louver			

Job Name/Date:

Fixture Type Designation:

FIXTURE DIMENSIONS

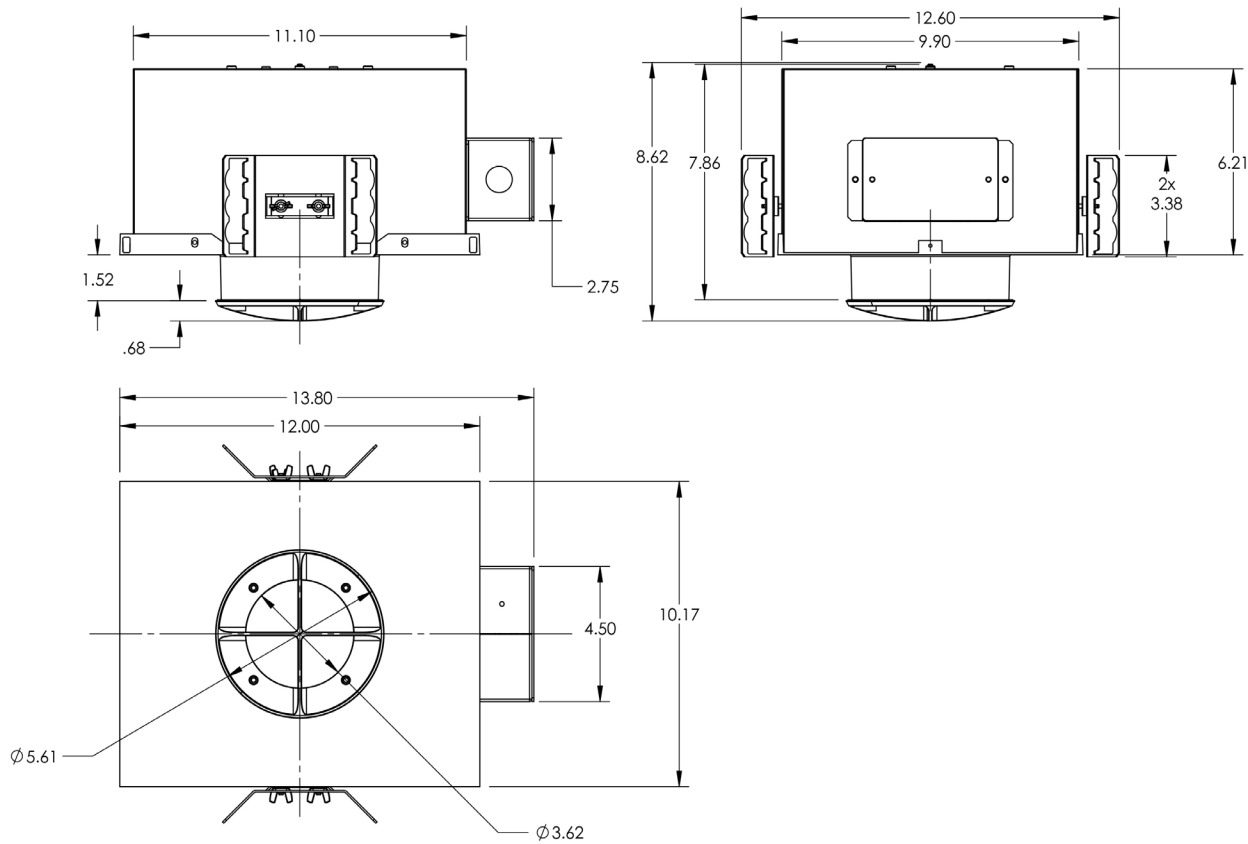

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC - RGBW

Part Number	Description	Input/Output	# of Fixtures
PPLT00288	DMX / RDM (Field Addressable) / Dali	120-277VAC to 24VDC, 100W, Class 2, DRY	1-3

SUGGESTED POWER SUPPLIES

24VDC - Tunable White

Part Number	Description	Input/Output	# of Fixtures
PPLT00726	ELV / TRIAC & 0-10V to 0.1% Tunable White	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-3


For other power supply options consult factory.

PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 3341

— C0 - C180
— C90 - C270

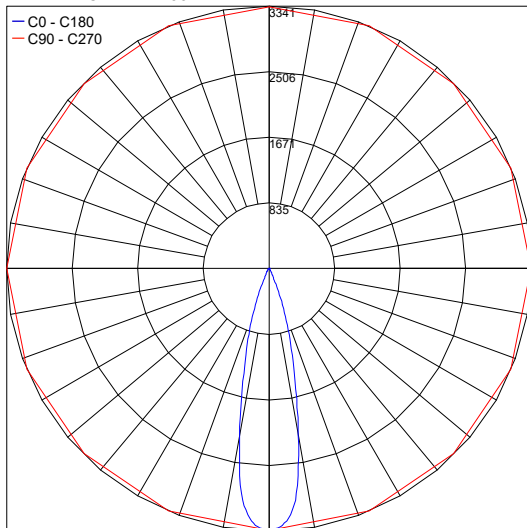

PHOTOMETRIC FILENAME : RXT RGBW+TUNABLE 45° (LLIA001367-001).IES

Job Name/Date:

Fixture Type Designation: