

RAZOR



MODULAR
AND CUT-TO-SIZE SYSTEM

Private Villa, Austria | ASZ Architetti | ph. SUPERFUTUREDESIGN*




Razor



OTHER AVAILABLE CODES

BU6968.27.AC lens 14°
light color 2700K

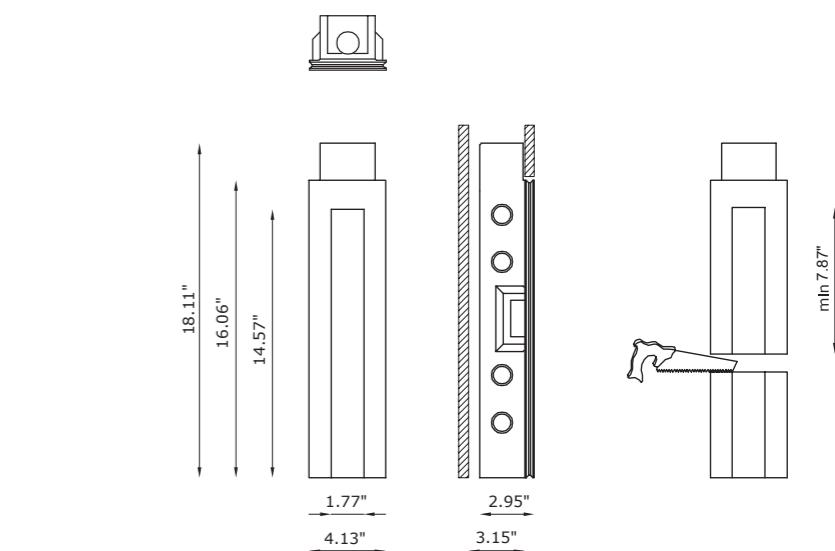

TECHNICAL FEATURES | ELECTRIFIED BODY

Code	BU6968.AC
Type	Downlight 90° Wall recessed 90°
Material	 AC: AirCoral®
Absorption capacity*	87.62 ft ²
Weight	6.17 lbs
Mounting	Wall and ceiling recessed
IP rating	IP40
Control gear	-
Cut out for plasterboard	16.34 x 4.53 in
Lamp type	LED
Lamp wattage	Vf: 3 VDC
Luminous efficacy	1 x 1W - 350 mA 1 x 2W - 500 mA 1 x 75 lm - 3000K 350mA 1 x 170 lm - 3000K 500mA
Light distribution	Narrow beam 14°
Fitting	-
Light color	White 3000K
Light hole	14.57 x 1.77 in
Voltage connection	By driver (optional)
CRI	>90
Note	It is possible to cut the electrified body to obtain a light hole 7.87 in minimum. Other available light colors: 2700K, 4000K (on request).

OPTIONAL

Brick box cod. BR6968LT



BLADE IP65
see page 433

designplan® 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

* The absorption capacity per ft² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft².




Blade



OTHER AVAILABLE CODES

BU6967.27.AC lens 14°
 light color 2700K

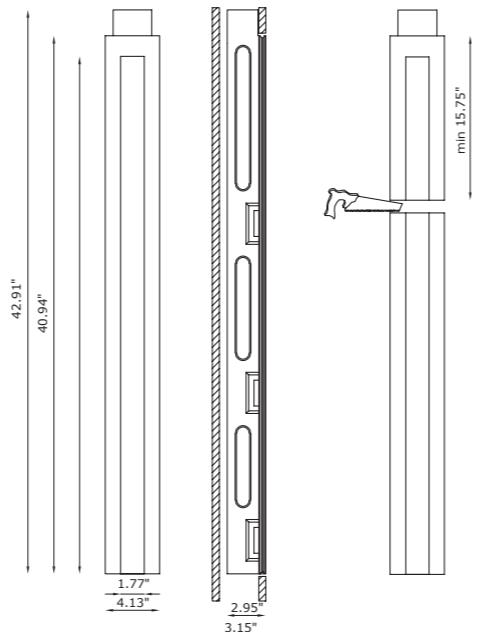

TECHNICAL FEATURES | ELECTRIFIED BODY

Code	BU6967.AC
Type	Downlight 90° Wall recessed 90°
Material	AC: AirCoral®
Absorption capacity*	207.53 ft ²
Weight	13.67 lbs
Mounting	Wall and ceiling recessed
IP rating	IP40
Control gear	-
Cut out for plasterboard	41.34 x 4.53 in
Lamp type	LED
Lamp wattage	Vf: 3 VDC
Luminous efficacy	1 x 1W - 350 mA 1 x 2W - 500 mA 1 x 75 lm - 3000K 350 mA 1 x 170 lm - 3000K 500 mA
Light distribution	Narrow beam 14°
Fitting	-
Light color	White 3000K
Light hole	14.57 x 1.77 in
Voltage connection	By driver (optional)
CRI	>90
Note	It is possible to cut the electrified body to obtain a light hole 15.75 in minimum. Other available light colors: 2700K.

OPTIONAL

Brick box cod. BR6967LT

designplan®

79 Trenton Avenue
Frenchtown, NJ 08825



www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042


BLADE IP65
see page 433

TECHNICAL FEATURES | MODULAR BODY

Code	BU6961.AC
Material	AC: AirCoral®
Absorption capacity*	69.64 ft ²
Weight	4.41 lbs
IP rating	-
Cut out for plasterboard	(13.78 in for each module installed) x 4.53 in
Light hole	(13.78 in for each module installed) x 1.77 in
Note	-

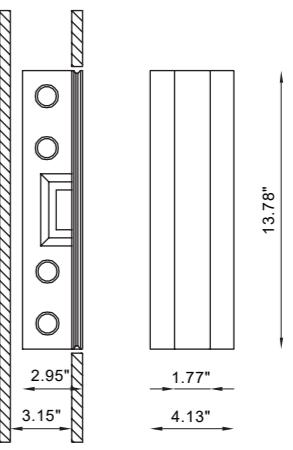

4.13" 2.95"



4.06" 3.94" 2.95"

TECHNICAL FEATURES | CLOSURE HEADPARTS

Code	BU6962.AC
Material	AC: AirCoral®
Absorption capacity*	27.88 ft ²
Weight	1.54 lbs
IP rating	-
Cut out for plasterboard	4.53 x 4.53 in
Light hole	-
Note	Supplied singularly it can be used in alternative to a further electrified body (code 6968.AC / 6967.AC) to close a continuous line of the BLADE product.

* The absorption capacity per ft² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft².

EXAMPLES OF INSTALLATION

