

Design
Mammini+Candido

RAZOR




Blade is a totally disappearing indoor recessed luminaire made of AirCoral[®], installable on plasterboard or brick walls and ceilings. A blade of light that can be used in multiple ways, creating actual bright cuts inside walls. Blade can be installed with one or two counterposed light sources that illuminate the body. Integrate inside walls or ceilings, it highlights paths and defines spaces.

designplan[®]

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

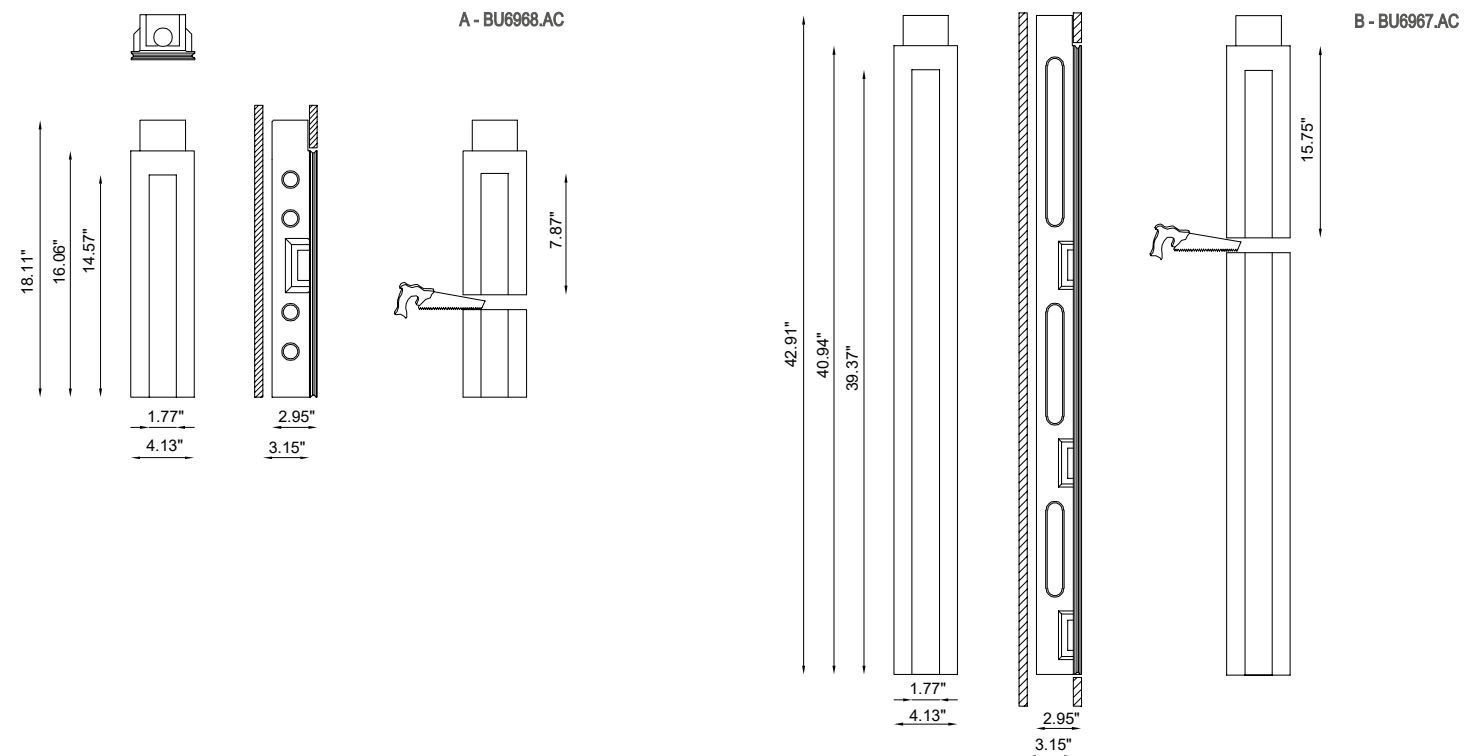


TECHNICAL FEATURES | ELECTRIFIED BODY

Code	BU6968.AC (fig. A)	BU6967.AC (fig. B)
Type	Downlight 90° Wall recessed 90° 	Downlight 90° Wall recessed 90°
Material	AC: AirCoral [®]	AC: AirCoral [®]
Absorption capacity*	26.71 ft ²	63.25 ft ²
Weight	6.17 lbs	13.67 lbs
Mounting	Wall and ceiling recessed	Wall and ceiling recessed
IP rating	IP40	IP40
Cut out for plasterboard	16.34" x 4.53"	41.34" x 4.53"
Lamp type	LED 	LED
Lamp wattage	2W - 500mA	2W - 500mA
Luminous efficacy	75 lm/W - 3000K	75 lm/W - 3000K
Light distribution	Narrow beam 14°	Narrow beam 14°
Light color	White 3000K White 2700K (on request)	White 3000K White 2700K (on request)
Light hole	14.57" x 1.77"	39.37" x 1.77"
Voltage connection	Remote driver needed	Remote driver needed
CRI	>90	>90
Note	It is possible to cut the electrified body to obtain a light hole 7.87" minimum. This product could be ordered with IP44 / IP65 protection grade (see OUTDOOR or BATHROOM section - code BU6965.CW / BU6987.CW).	It is possible to cut the electrified body to obtain a light hole 15.75" minimum. This product could be ordered with IP44 / IP65 protection grade (see OUTDOOR or BATHROOM section - code BU6965.CW / BU6987.CW).

* The absorption capacity per ft³ calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft" in height and therefore expressed in ft²

EXAMPLES OF INSTALLATION


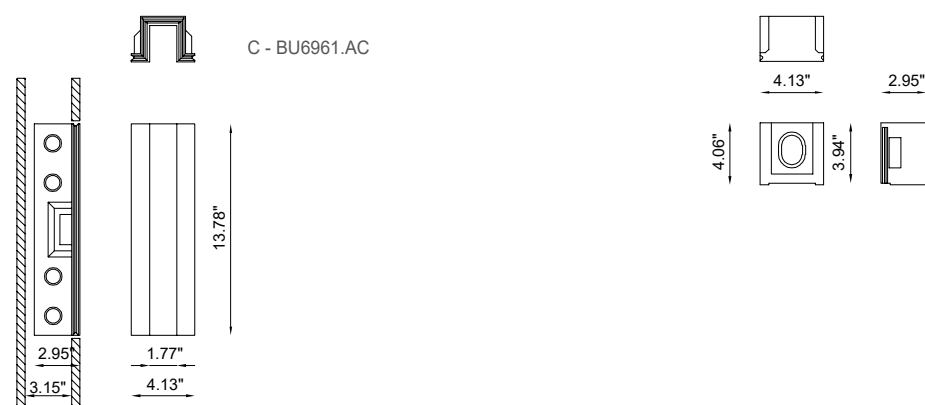


TECHNICAL FEATURES | MODULAR BODY


Code	BU6961.AC (fig. C)
Material	AC: AirCoral®
Absorption capacity*	21.23 ft²
Weight	4.41 lbs
IP rating	-
Cut out for plasterboard	(13.78" for each module installed) x 4.53"
Light hole	(13.78" for each module installed) x 1.77"
Note	This product could be ordered with IP44 / IP65 protection grade (see OUTDOOR or BATHROOM section - code BU6964.CW).

TECHNICAL FEATURES | CLOSURE HEADPARTS


Code	BU6962.AC (fig. D)
Material	AC: AirCoral®
Absorption capacity*	8.50' ft²
Weight	1.54 lbs
IP rating	-
Cut out for plasterboard	4.53" x 4.53"
Light hole	-
Note	This product could be ordered with IP44 / IP65 protection grade (see OUTDOOR section - code BU6963.CW). Supplied singularly it can be used in alternative to a further electrified body (code BU6968.AC / BU6967.AC) to close a continuous line of the RAZOR product.

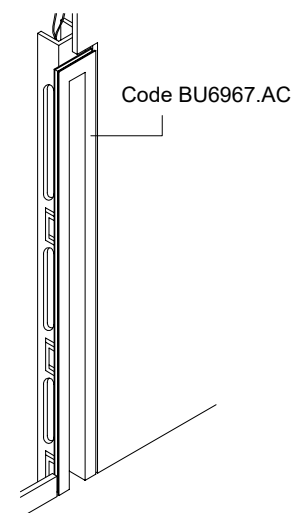


Singular module
No. 1 electrified body

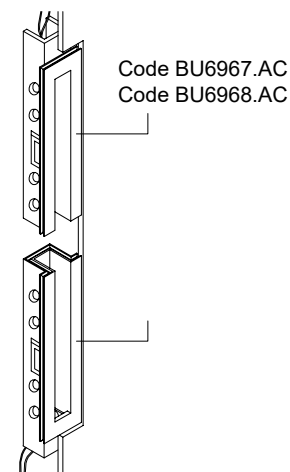

No. 2 electrified bodies
in opposite position

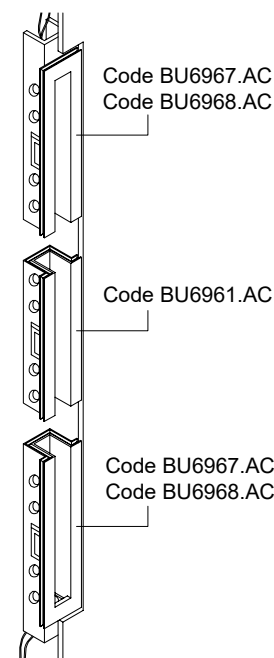

No. 2 electrified bodies
in opposite position
No. 1 modular body in AirCoral®

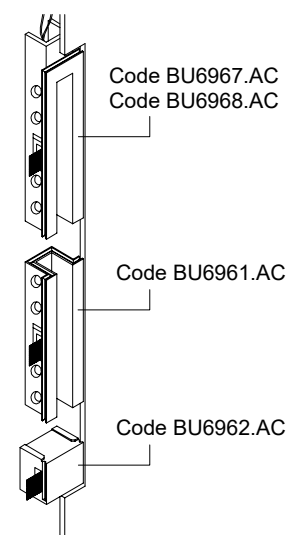

No. 1 electrified body
No. 1 modular body in AirCoral®
No. 1 closure headpart



* The absorption capacity per ft² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²