

Razor is a totally disappearing modular recessed luminaire made of AirCoral® that is suitable for installation on walls or ceilings, highlighting paths and defining spaces. It creates a blade of light 1.77" wide and is available in 3000K as standard with a 14° optic and a 90° light beam inclination.



## TECHNICAL DATA

|                           |  |
|---------------------------|--|
| <b>Wattage / Input</b>    | 2W (500mA)   |
| <b>Power Supply</b>       | Remote, not included. See page 2.                                |
| <b>Construction</b>       | Body: AirCoral®  |
| <b>CCT</b>                | 3000K (2700K, 4000K on request)                                  |
| <b>CRI</b>                | >90  |
| <b>Delivered Lumens</b>   | 75 lm (3000K)  |
| <b>Efficacy</b>           | 37.5 lm/W  |
| <b>Optics</b>             | 14°  |
| <b>Finishes</b>           | AirCoral®  |
| <b>LED Source</b>         | Professional COB LED   |
| <b>Fixture Dimensions</b> | BU6968.AC - 16.06" l x 4.13" w<br>BU6967.AC - 40.94" l x 4.13" w |
| <b>Cut-out Dimension</b>  | BU6968.AC - 16.34" l x 4.53" w<br>BU6967.AC - 41.34" l x 4.53" w |
| <b>Fixture Weight</b>     | BU6968.AC - 6.17 lbs<br>BU6967.AC - 13.67 lbs                    |
| <b>IP Rating</b>          | IP40   |

Fixture Dimensions  
See Drawing on page 2

See Accessories on page 3

This product could be ordered with  
IP44 / IP65 protection grade  
(see OUTDOOR or BATHROOM section)

## ORDERING INFORMATION


Example: BU6967.30.AC.US. Power Supplies and Accessories ordered separately.

|                               |   |                                |   |                       |           |    |
|-------------------------------|---|--------------------------------|---|-----------------------|-----------|----|
|                               | . |                                | . | AC                    | .         | US |
| <b>Model No.</b>              |   | <b>CCT</b>                     |   | <b>Finish</b>         |           |    |
| <b>BU6968</b> - 16.06" length |   | <b>30</b> - 3000K (standard)   |   | <b>AC</b> - AirCoral® |           |    |
| <b>BU6967</b> - 40.94" length |   | <b>27</b> - 2700K (on request) |   |                       | <b>US</b> |    |
|                               |   | <b>40</b> - 4000K (on request) |   |                       |           |    |

Job Name/Date:

Fixture Type Designation:


## FIXTURE DIMENSIONS

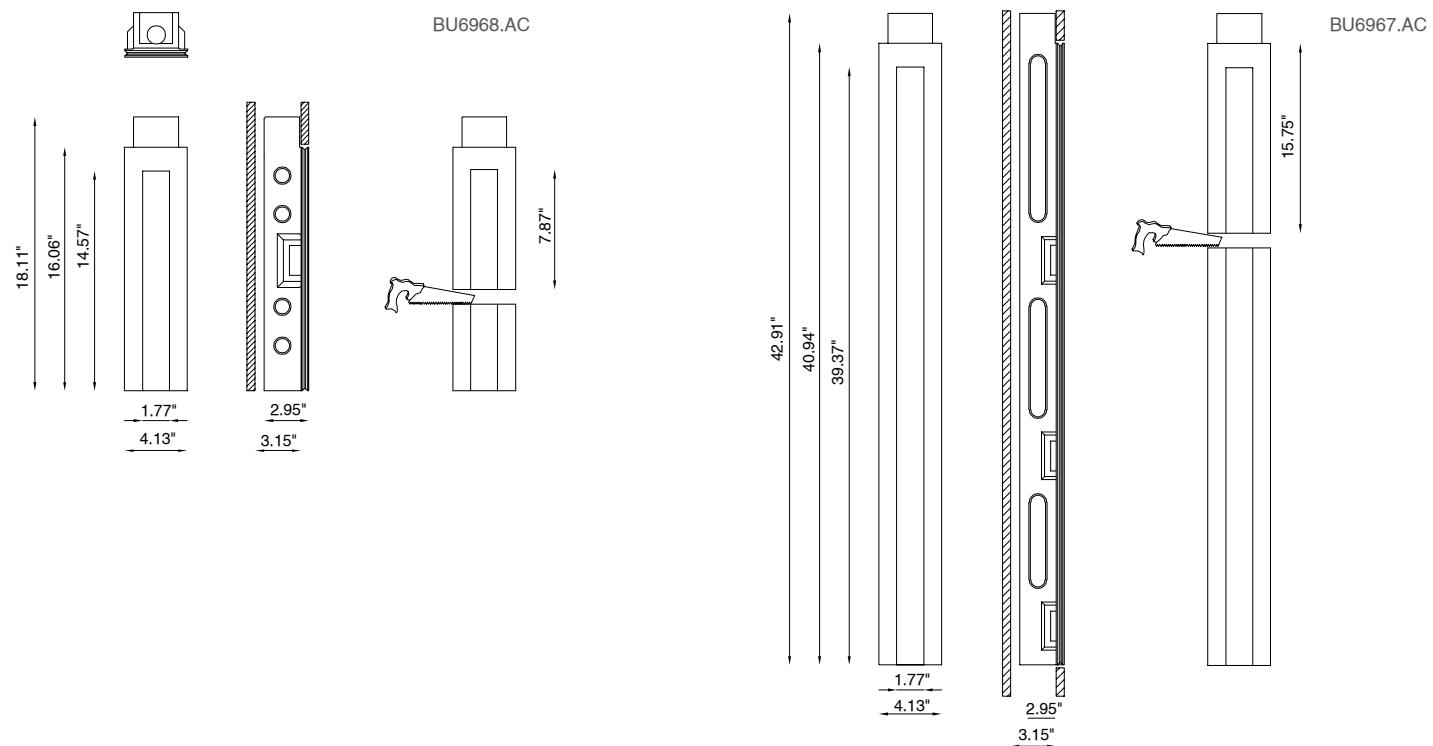

## PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 16.5

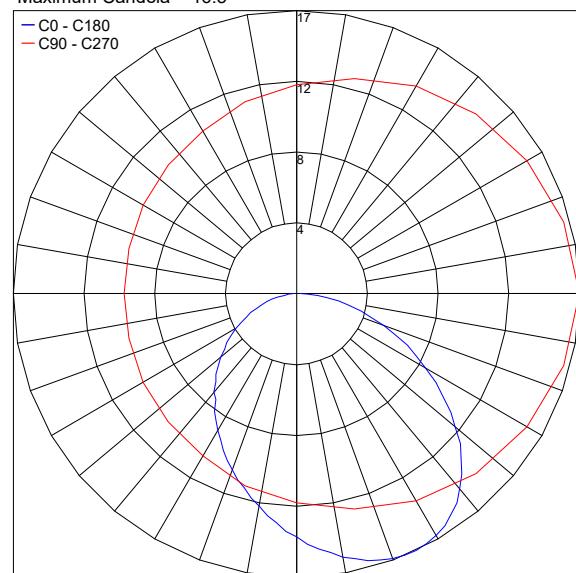

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

500mA

| Part Number                 | Description  | Input/Output                       | # of Fixtures |
|-----------------------------|--|------------------------------------|---------------|
| <a href="#">PPLT00469</a>   | Phase Dim (120V only)                              | 120VAC to 500mA, 14W, Class 2      | 4-7           |
| <a href="#">PPLT00262</a>   | Leading / Trailing-Edge Dimming to 10% (120V only) | 120-277VAC to 500mA, 32W, Class 2  | 7-15          |
| <a href="#">PPLT00467-P</a> | 0-10V Dimming to 1.0%                              | 120-277VAC to 500mA, 50W, Class 2  | 1-18          |
| <a href="#">PPLT00561-P</a> | 0-10V Dimming to 0.1%                              | 120-277VAC to 500mA, 100W, Class 2 | 2-16          |


Suggested Lutron Compatible

| Part Number               | Option         | Lutron SKU | Dim Range | Description                                    | Input/Output                      | # of Fixtures |
|---------------------------|----------------|------------|-----------|--|-----------------------------------|---------------|
| <a href="#">PPLT00259</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 500mA, 10W, Class 2 | 3-5           |
| <a href="#">PPLT00195</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 500mA, 19W, Class 2 | 6-9           |
| <a href="#">PPLT00180</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 500mA, 27W, Class 2 | 11-13         |

For other power supply options consult factory.

## ACCESSORIES

## Installation

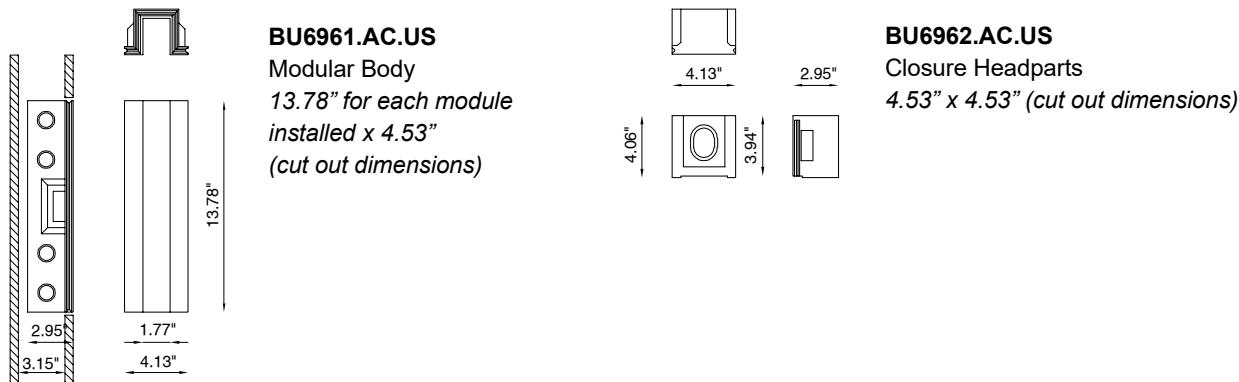

Job Name/Date:

Fixture Type Designation: