

RAZOR IP44 / IP65

Razor IP44 / IP65 is a totally disappearing modular recessed luminaire made of Coral WaterOut® that is suitable for outdoor installation on walls or ceilings. It is available in 3000K as standard with a 14° optic and creates a blade of light 1.77" wide.



Fixture Dimensions
See Drawing on page 2

See Accessories on page 3

TECHNICAL DATA

Wattage / Input	2W (500mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: Coral WaterOut®
CCT	3000K (2700K, 4000K on request)
CRI	>90
Delivered Lumens	75 lm (3000K)
Efficacy	37.5 lm/W
Optics	14°
Finishes	Coral WaterOut®
LED Source	Professional COB LED
Fixture Dimensions	BU6987.CW - 16.06" l x 4.13" w BU6988.CW - 40.94" l x 4.13" w
Cut-out Dimension	BU6987.CW - 16.34" l x 4.53" w BU6988.CW - 41.34" l x 4.53" w
Aperture	BU6987.CW - 14.57" l x 1.77" w BU6988.CW - 39.37" l x 1.77" w
Fixture Weight	BU6987.CW - 6.17 lbs BU6988.CW - 13.67 lbs
IP Rating	IP44, IP65

ORDERING INFORMATION


Example: BU6988.40.CW.US. Power Supplies and Accessories ordered separately.

		CW	US
Model No.	CCT	Optics	
BU6987 - 16.06" length	30 - 3000K	CW - CoralWaterOut®	US
BU6988 - 40.94" length	27 - 2700K		
	40 - 4000K		

Job Name/Date:

Fixture Type Designation:

FIXTURE DIMENSIONS

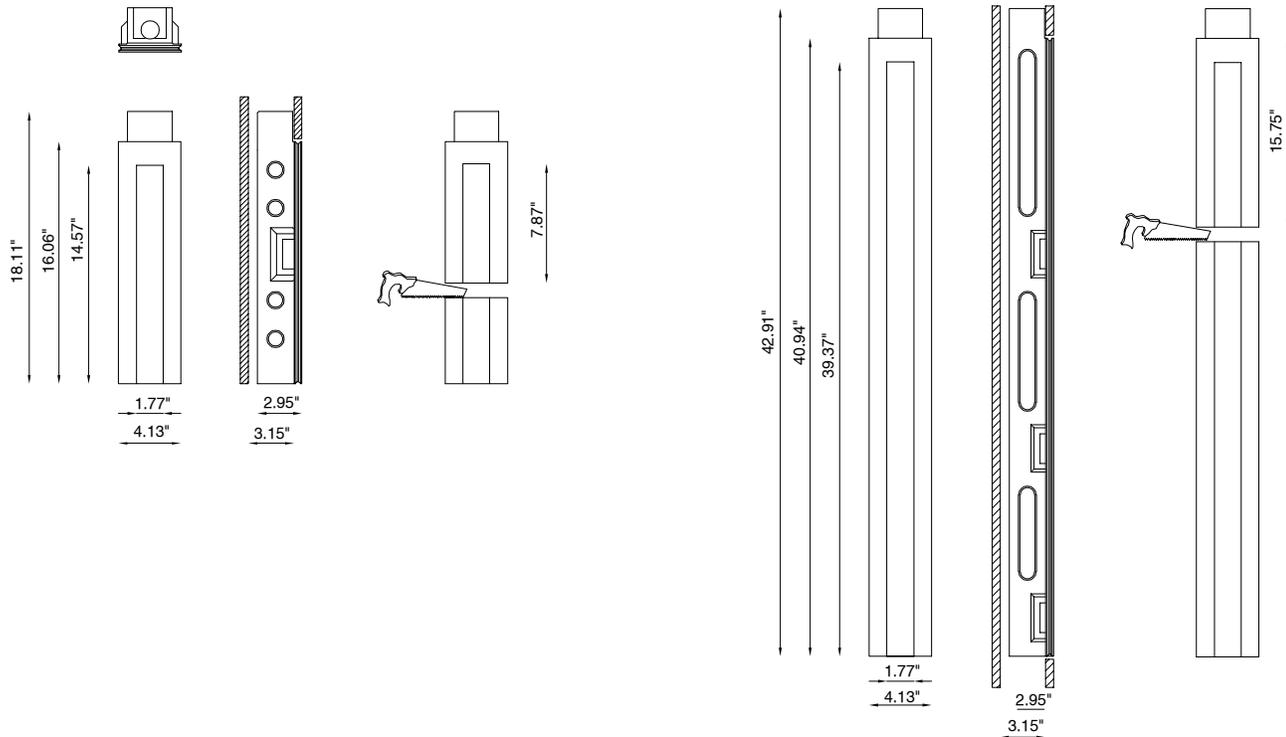


PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 16.5

— C0 - C180
— C90 - C270

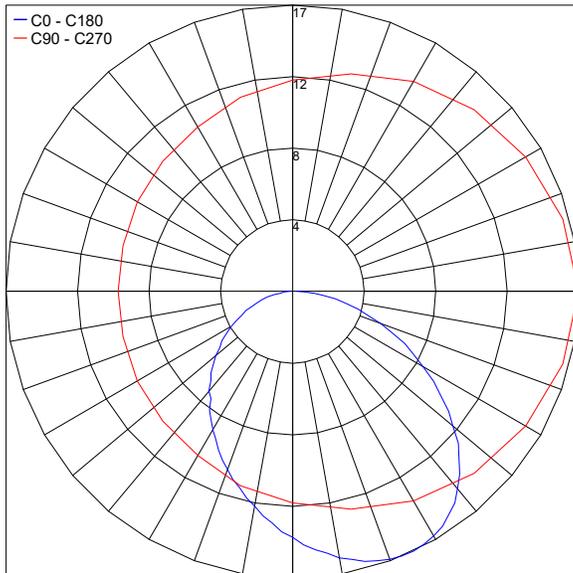

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

500mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00469	Phase Dim (120V only)	120VAC to 500mA, 14W, Class 2	4-7
PPLT00262	Leading / Trailing-Edge Dimming to 10% (120V only)	120-277VAC to 500mA, 32W, Class 2	7-15
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2, DAMP	1-18
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 500mA, 100W, Class 2	2-16


Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00259	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 10W, Class 2	3-5
PPLT00195	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 19W, Class 2	6-9
PPLT00180	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 27W, Class 2	11-13


For other power supply options consult factory.

ACCESSORIES

Installation

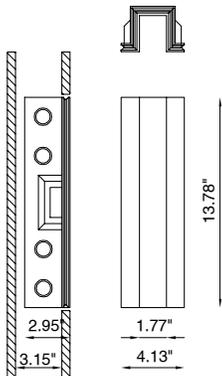

BU6964.CW.US
 Modular Body
 13.78" for each module
 installed x 4.53"
 (cut out dimensions)



BU6963.CW.US
 Closure Headparts
 4.53" x 4.53" (cut out dimensions)

Job Name/Date:

Fixture Type Designation: