




Rim







OTHER AVAILABLE CODES

BU4433.Z.27.00 40° lens 2700K light color 40° BU4433.Z.40.00 lens light color 4000K (on request)

TECHNICAL FEATURES

Code BU4433.Z.00 Downlight 90° Type \wedge Material 00: Coral®

1.76 lbs Weight Mounting Ceiling recessed IP rating IP40 Control gear

Remote constant current electronic driver (not included) A: 3.94 in

Dimensions Cut out for plasterboard Ø 5.91 in LED 500 mA Lamp type

⇒ Vf: 18 VDC $1 \times 9W$ Lamp wattage Luminous efficacy 1 × 1125 lm - 3000K

Light distribution Wide beam 40° Fitting Light color White 3000K Ø 3.15 in Light hole Voltage connection By driver (optional) CRI >90 Note Extra white satin glass.

Frosted glass recessed 0.39 in into the ceiling. Other available light colors: 2700K, 4000K (on request).

OPTIONAL

cod. BR4433LT Brick box



79 Trenton Avenue Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710 Fax: (908) 996-7042

Indoor Recessed



Maxi Rim

BU4441.40.00

OTHER AVAILABLE CODES

BU4441.27.00 40° 2700K light color

> 40° lens light color 4000K (on request)

TECHNICAL FEATURES

Ø 10.24" Ø 7.87"

Code BU4441.00 Downlight 90° Type

Material 00: Coral® 4.63 lbs Weight Mounting Ceiling recessed IP40 IP rating ON/OFF driver (included) Control gear Dimensions A: 5.31 in

Ø 10.63 in Cut out for plasterboard Lamp type LED 700 mA 40

 $1 \times 27W$ Lamp wattage Luminous efficacy 1 × 102 lm/W - 3000K Light distribution Wide beam 40°

Fitting White 3000K Light color Light hole Ø 7.87 in 220-240V · 50/60Hz

CRI

Voltage connection

Extra white satin glass. Frosted glass recessed **0.39 in** into the ceiling. Note


DALI driver on request.

Other available light colors: 2700K, 4000K (on request).



79 Trenton Avenue Frenchtown, NJ 08825

Tel: (908) 996-7710 Fax: (908) 996-7042

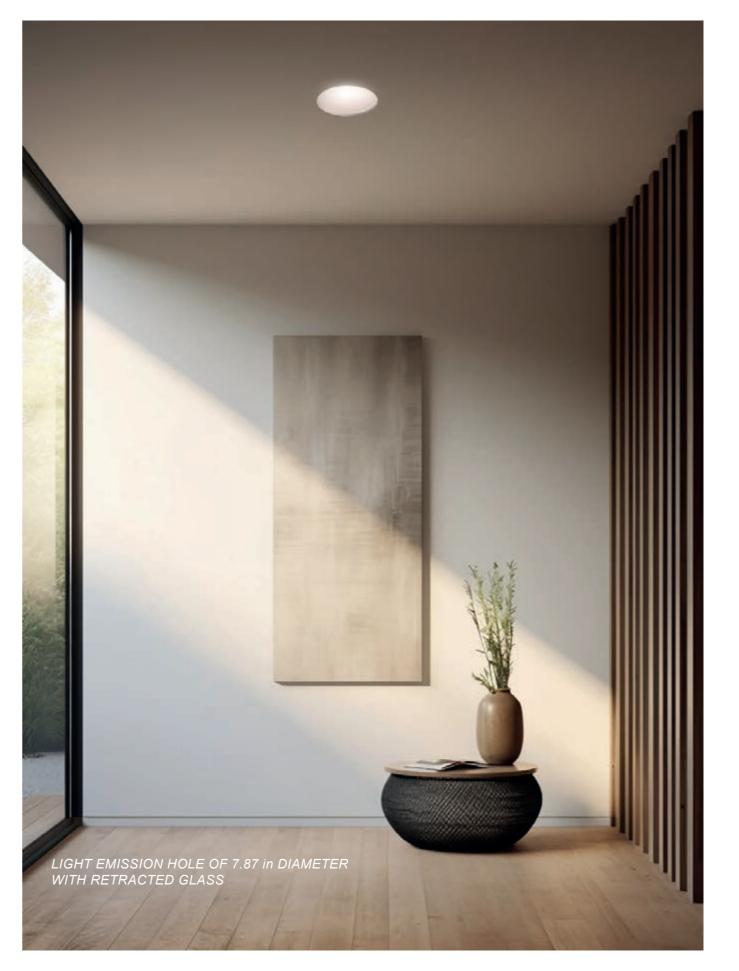

 $^{^{\}star}$ The absorption capacity per $ft^{\rm 3}$ calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of $8.86\ ft$ in height and therefore expressed in $ft^{\rm 2}$