


Ring is a totally disappearing recessed adjustable downlight made of AirCoral® suitable for installation on plasterboard or brick ceilings. It is available with a 40° optic and a +/- 30° light beam inclination. 3000K or Dim to Warm standard.



TECHNICAL DATA

Wattage / Input	9W (500mA - Static White) 6W (350mA - Dim to Warm)
Power Supply	Remote, not included. See page 2.
Construction	Body: AirCoral®
CCT	3000K (2700K, 4000K on request) Dim to Warm (1800K-3000K)
CRI	>90
Delivered Lumens	557 lm (3000K)
Efficacy	61.9 lm/W
Optics	40°
Finishes	AirCoral® - unfinished
Fixture Dimensions	Ø6.30" x 3.54" h
Cut-out Dimension	Ø6.69" (for ceiling installations)
Aperature	Ø3.94"
Fixture Weight	1.98 lbs
IP Rating	IP20

Fixture Dimensions

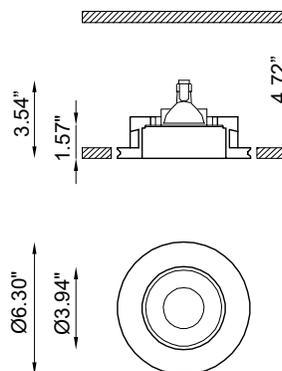

The body is made of Aircoral® a unique patented composite material that actually purifies the air. It can be calculated how many cubic feet each fixture will purify. See website for Aircoral® calculator.

Additionally, Aircoral® is:

- Antibacterial.
- Antifungal.
- Scratch-resistant.
- Dust-resistant.
- Suitable for painting.
- LEED recognized material.

ORDERING INFORMATION

Example: BU6238.Z.27.AC.US. Accessories / Power Supplies ordered separately.

<input type="text"/>	<input type="text"/>	<input type="text" value="AC"/>	<input type="text" value="US"/>
Model No.	CCT	Finish	
BU6238.Z	30 - 3000K (standard) 27 - 2700K (on request) 40 - 4000K (on request)	AC - AirCoral®	US
BU6312.AC4R40M98WD	Dim to Warm 1800K-3000K		

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

500mA - Static White version

Part Number	Description	Input/Output	# of Fixtures
PPLT00469	Phase Dim (120V only)	120VAC to 500mA, 14W, Class 2	1-1
PPLT00262	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 500mA, 32W, Class 2	2-2
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2, DAMP	1-3
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 500mA, 100W, Class 2	1-2

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00259	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 10W, Class 2	1-1
PPLT00195	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 19W, Class 2	1-2
PPLT00180	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 27W, Class 2	2-2

SUGGESTED POWER SUPPLIES

350mA - Dim to Warm version

Part Number	Description	Input/Output	# of Fixtures
PPLT00468	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	1-2
PPLT00263	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	2-2
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2, DAMP	1-3
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-2

Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00247	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 7W, Class 2	1-1
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	1-2
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 27W, Class 2	2-3

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

ACCESSORIES Installation

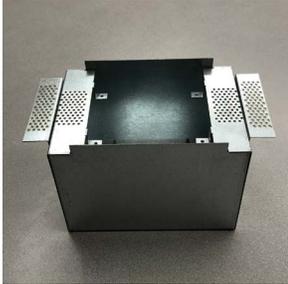


BR6238-LT
IC Rated Back Box

BR6238-LT-C
Chicago Plenum Back Box

BR6238-LT-PC
Concrete Pour Back Box

PHOTOMETRIC DATA

Note all Photometry is 3000K

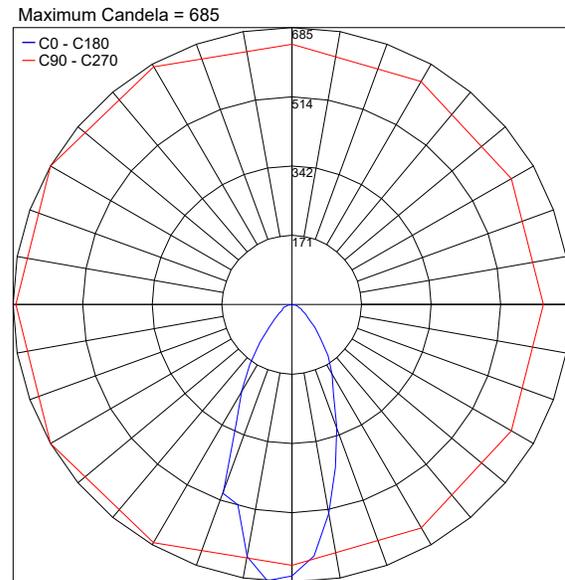

Job Name/Date:

Fixture Type Designation: