

# RING




SWIVELLING RECESSED FIXTURE  
WITH 3.94 in LIGHT EMISSION HOLE

Giovanardi Law Office, Milan | design A. Castrignano | ph. Le Michette Creative Studio

## Indoor Recessed



### Ring

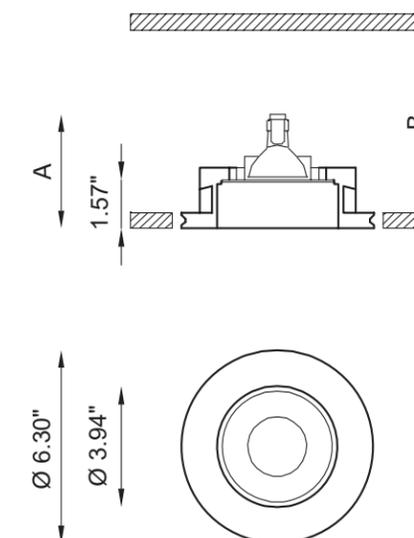

#### OTHER AVAILABLE CODES

BU6238.Z.27.AC	<i>lens</i>	40°
	<i>light color</i>	2700K
BU6238.Z.40.AC	<i>lens</i>	40°
	<i>light color</i>	4000K (on request)
example of code composition		6238.AC 4 R 40 M 30 WD

#### TECHNICAL FEATURES

Code	BU6238.Z.AC
Type	Tiltable downlight and wall recessed ± 30°
Material	AC: AirCoral®
Absorption capacity*	27.13 ft <sup>2</sup>
Weight	1.98 lbs
Mounting	Wall and ceiling recessed
IP rating	IP20
Control gear	Remote constant current electronic driver (not included)
Dimensions	A: 3.54 in; B: 4.72 in
Cut out for plasterboard	Ø 6.69 in
Lamp type	LED 500 mA
	Vf: 18 VDC
Lamp wattage	1 × 9W
Luminous efficacy	1 × 1125 lm - 3000K
Light distribution	Wide beam 40°
Fitting	-
Light color	White 3000K
Light hole	Ø 3.94 in
Voltage connection	By driver (optional)
CRI	>90
Note	Other available light colors: 2700K, 4000K (on request).

#### OPTIONAL

Brick box	cod. BR6238LT
-----------	---------------

designplan®

79 Trenton Avenue  
Frenchtown, NJ 08825

www.designplan.com


Tel: (908) 996-7710  
Fax: (908) 996-7042

\* The absorption capacity per ft<sup>2</sup> calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft<sup>2</sup>

Indoor Recessed



### Ring Dim To Warm

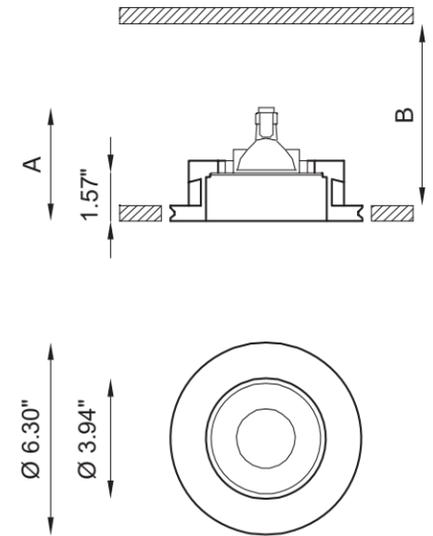

### TECHNICAL FEATURES

Code	<b>BU6312.AC</b> 4 R 40 M 98 WD
Type	Tiltable downlight and wall recessed ± 30°
Material	AC: <b>AirCoral®</b>
Absorption capacity*	27.13 ft <sup>2</sup>
Weight	1.98 lbs
Mounting	Wall and ceiling recessed
IP rating	IP20
Control gear	Remote driver** (not included)
Dimensions	A: 3.54 in; B: 4.72 in
Cut out for plasterboard	Ø 6.69 in
Lamp type	LED 350 mA V <sub>L</sub> : 17 VDC
Lamp wattage	1 × 6W
Luminous efficacy	1 × 600 lm (from 1800K up to 3000K)
Light distribution	Wide beam 40°
Fitting	-
Light color	Dimming range 1800/3000K
Light hole	Ø 3.94 in
Voltage connection	By driver (optional)
CRI	>90
Note	**Ring Dim To Warm requires dimming: amplitude (AM) dim to warm wide range input voltage.

### OPTIONAL

Brick box cod. BR1875LT



79 Trenton Avenue  
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710  
Fax: (908) 996-7042

\* The absorption capacity per ft<sup>3</sup> calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft<sup>2</sup>