

RIO 2 SERIES

RIO 2.0, 2.1, 2.2, 2.3, 2.4

Slim, sleek and tough, the Rio Series illuminates ground, wall and ceiling installations with no dark zone between fixtures. Available in Static White or RGB and with the use of the aluminum housing is driveover up to 11,000 lbs.



Fixture Dimensions
See page 2 for drawings

TECHNICAL DATA

Wattage / Input	See Chart on page 2. (24VDC)
Power Supply	Remote, not included. See page 3.
Construction	Body: PMMA End Caps: 316L Stainless Steel Lens: Opal PMMA Housing: Aluminum or Stainless Steel
CCT	2600K, 2800K, 3700K, RGB
CRI	CRI >80
BUG Rating	B0-U1-G0 (2800K, 5W, 8W, 10W, 16W) B0-U1-G1 (2800K, 19W, 29W) B1-U1-G1 (2800K, 38W)
Delivered Lumens	See Chart on page 2.
Efficacy	30 lm/W (White), 11 lm/W (RGB)
Optics	Diffuse
Finishes	N/A
Cut-Out Dimensions	See Chart on page 2.
Fixture Dimensions	See Chart on page 2.
Fixture Weight	See Chart on page 2.
LED Source	SMD Low Power (SW), SMD Full Color (RGB)
Lumen Maintenance	L80 >50,000hrs
Color Consistency	3-Step MacAdam
Operating Temp.	-4°F to +113°F
IP Rating	IP67
Impact Rating	IK10
Driveover	Up to 11,000 lbs (With aluminum housing)

ORDERING INFORMATION

Example: RE21005DB or RE21005DB-3. Accessories / Power Supplies ordered separately.

		DB	
Model No.	CCT	Optics	Cable Length
RE2000 - Rio 2.0	F - 2600K	DB - Diffuse	4.92' standard
RE2100 - Rio 2.1	5 - 2800K		1 - 16.40'
RE2200 - Rio 2.2	9 - 3700K		2 - 32.81' - not for use with RGB
RE2300 - Rio 2.3	6 - RGB - only uses standard 4.92'		3 - 49.21' - not for use with RGB
RE2400 - Rio 2.4	or 16.40' cable		4 - 65.62' - not for use with RGB

Job Name/Date:


Fixture Type Designation:

RIO 2 SERIES


RIO 2.0, 2.1, 2.2, 2.3, 2.4

TECHNICAL DATA


	RIO 2.0		RIO 2.1		RIO 2.2		RIO 2.3		RIO 2.4	
	WHITE	RGB	WHITE	RGB	WHITE	RGB	WHITE	RGB	WHITE	RGB
Wattage	5W	4.5W	10W	8.5W	19W	17W	29W	26W	38W	34W
Delivered Lumens (2800K)	145 lm	50 lm	290 lm	100 lm	580 lm	200 lm	870 lm	300 lm	1160 lm	400 lm
Fixture Dim. (l,w,h)	10.24" x 1.46" x 2.20"		20.08" x 1.46" x 2.20"		39.76" x 1.46" x 2.20"		59.45" x 1.46" x 2.20"		79.13" x 1.46" x 2.20"	
Alum. Housing 3.31" Dim. (l,w,h) & Cut-Out Size (l,w)	10.39" x 1.65" x 3.31" 10.39" x 1.65"		20.24" x 1.65" x 3.31" 20.24" x 1.65"		39.92" x 1.65" x 3.31" 39.92" x 1.65"		59.65" x 1.65" x 3.31" 59.65" x 1.65"		79.33" x 1.65" x 3.31" 79.33" x 1.65"	
Alum. Housing 2.50" Dim. (l,w,h) & Cut-Out Size (l,w)	10.39" x 1.67" x 2.50" 10.39" x 1.67"		20.24" x 1.67" x 2.50" 10.39" x 1.67"		39.92" x 1.67" x 2.50" 10.39" x 1.67"		59.65" x 1.67" x 2.50" 10.39" x 1.67"		79.33" x 1.67" x 2.50" 10.39" x 1.67"	
SS Housing Dim. (l,w,h) & Cut-Out Size (l,w)	10.35" x 1.58" x 3.50" 10.35" x 1.58"		20.20" x 1.58" x 3.50" 20.20" x 1.58"		39.88" x 1.58" x 3.50" 39.88" x 1.58"		59.61" x 1.58" x 3.50" 59.61" x 1.58"		79.29" x 1.58" x 3.50" 79.29" x 1.58"	
Fixture Weight	0.88 lb		0.174 lb		3.44 lb		5.16 lb		6.86 lb	




RIO 2.0

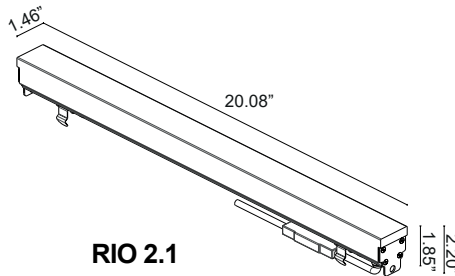


RIO 2.1

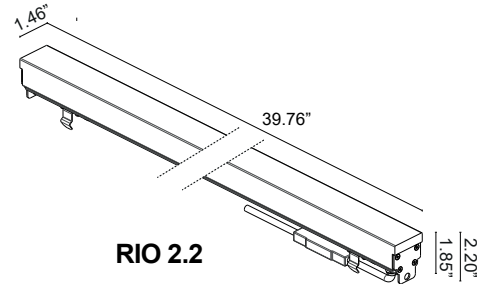

RIO 2.2

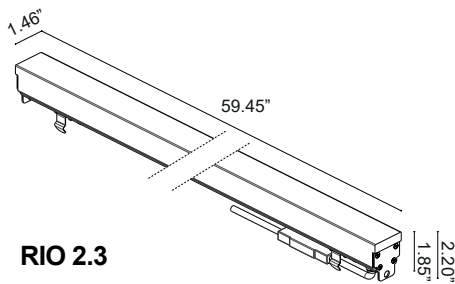

RIO 2.3

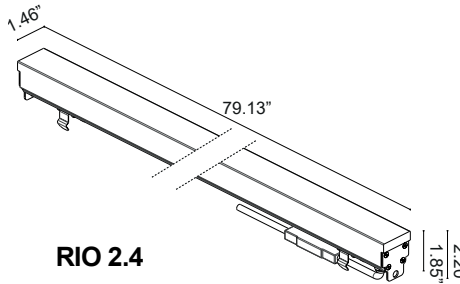

RIO 2.4

Job Name/Date:

Fixture Type Designation:

RIO 2 SERIES

RIO 2.0, 2.1, 2.2, 2.3, 2.4

SUGGESTED POWER SUPPLIES

STATIC WHITE, 24VDC

Part Number	Description	Input/Output	# of Fixtures / Power Supply				
			Rio 2.0	Rio 2.1	Rio 2.2	Rio 2.3	Rio 2.4
PPLT00632	0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2	1-1	-	-	-	-
PPLT00586	Non-Dim	120-277VAC to 24VDC, 40W, Class 2	1-6	1-3	1-1	1-1	-
PPLT00709	ELV/TRIAC & 0-10V Dimming to 5% and OFF	120-277VAC to 24VDC, 96W, Class 2, DAMP	1-15	1-7	1-4	1-2	1-2
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W	2 - 16	1 - 8	1 - 4	1 - 2	1 - 2

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures / Power Supply				
						Rio 2.0	Rio 2.1	Rio 2.2	Rio 2.3	Rio 2.4
PPLT00273	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-6	1-3	1-1	1-1	-
PPLT00530	L3DAE / L3D0	L3DA/L3D0	100%-1%	Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-15	1-7	1-4	1-2	1-2

For other power supply options consult factory.

RGB, 24VDC

Part Number	Description	Input/Output	# of Fixtures / Power Supply				
			Rio 2.0	Rio 2.1	Rio 2.2	Rio 2.3	Rio 2.4
PPLT00288	DMX / RDM (Field Addressable) /Dali	120-277VAC to 24VDC, 100W	1 - 17	1 - 9	1 - 4	1 - 3	1 - 2

For other power supply options consult factory.


Job Name/Date:

Fixture Type Designation:

RIO 2 SERIES

RIO 2.0, 2.1, 2.2, 2.3, 2.4


ACCESSORIES - Installation



Aluminum Outer Casing 3.31" h


**Must use for Driveover applications*
(Aluminum has been treated to avoid corrosion when in contact with concrete.)

- WC8220** - Rio 2.0 (L 10.39")
- WC8221** - Rio 2.1 (L 20.24")
- WC8222** - Rio 2.2 (L 39.92")
- WC8223** - Rio 2.3 (L 59.65")
- WC8224** - Rio 2.4 (L 79.33")



Stainless Steel Outer Casing 3.50" h

- WC8250** - Rio 2.0 (L 10.35")
- WC8251** - Rio 2.1 (L 20.20")
- WC8252** - Rio 2.2 (L 39.88")
- WC8253** - Rio 2.3 (L 59.61")
- WC8254** - Rio 2.4 (L 79.29")

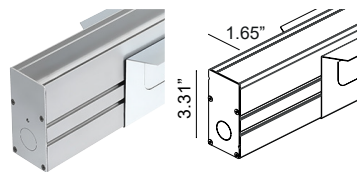

Aluminum Outer Casing for Plasterboard 3.31" h


- WC8420** - Rio 2.0 (L 10.39")
- WC8421** - Rio 2.1 (L 20.24")
- WC8422** - Rio 2.2 (L 39.92")
- WC8423** - Rio 2.3 (L 59.65")
- WC8424** - Rio 2.4 (L 79.33")

Job Name/Date:

Fixture Type Designation:

RIO 2 SERIES

RIO 2.0, 2.1, 2.2, 2.3, 2.4

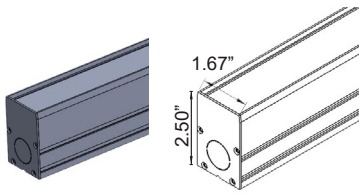

Aluminum Outer Casing
2.5" h
WCD920 - Rio 2.0 (L 10.39")
WCD921 - Rio 2.1 (L 20.24")
WCD922 - Rio 2.2 (L 39.92")
WCD923 - Rio 2.3 (L 59.65")
WCD924 - Rio 2.4 (L 79.33")

ACCESSORIES - Installation



WN8011 - Alignment Kit
 For Stainless Steel Outer Casings



WN6006 - Extractors (Pair)
 To Remove Fixture from Outer Casings




WN6005 - Alignment Kit
 For Aluminum 3.31" Outer Casings



WN8102 - Fixture Anti Fall Kit
 Optional for Ceiling (and if desired Wall) Installations




WND600525- Alignment Kit
 For Aluminum 2.5" Outer Casings



WN6002 - U-Shaped Brackets (Pair)
 For Plasterboard

PHOTOMETRIC DATA

D - Diffuse (Rio 2.0)

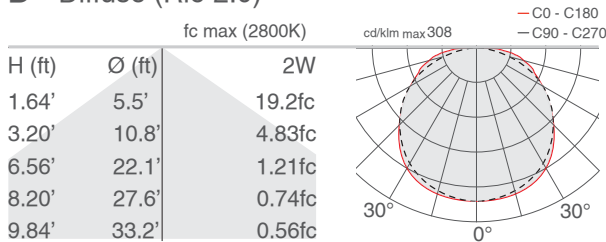

Job Name/Date:

Fixture Type Designation: