

RIO SUB 2 SERIES

RIO SUB 2.1, 2.2

Slim, sleek and tough, the Rio Sub Series can be used for outdoor and underwater applications and illuminates ground, wall and ceiling installations with no dark zone between fixtures. Available in Static White or RGB and with the use of the aluminum housing is walkover up to 1102 lbs.



Fixture Dimensions
See page 2 for chart

TECHNICAL DATA

Wattage / Input	See Chart on page 2. (24VDC)
Power Supply	Remote, not included. See page 3.
Construction	Body: 316L Stainless Steel End Caps: 316L Stainless Steel Lens: Opal PMMA Cable Length: 16.4'
CCT	2600K, 2800K, 3700K, RGB
CRI	>80
Delivered Lumens	See Chart on page 2.
Efficacy	Rio Sub 2.1: 29 lm/W (White) Rio Sub 2.2: 30.5 lm/W (White) Both: 11.8 lm/W (RGB)
Optics	Diffuse
Finishes	N/A
Cut-Out Dimensions	See Chart on page 2.
Fixture Dimensions	See Chart on page 2.
Fixture Weight	See Chart on page 2.
LED Source	SMD Low Power (SW and RGB)
Lumen Maintenance	L80>50,000hrs
Color Consistency	3-Step MacAdam
Operating Temp.	-4°F to +113°F
IP Rating	IP68
Impact Rating	IK10
Walkover	Up to 1102 lbs

OUTER CASING REQUIRED

ORDERING INFORMATION

Example: RS21005DB. Accessories / Power Supplies ordered separately.

		DB
Model No.	CCT	Optics
RS2100 - Rio Sub 2.1	F - 2600K	DB - Diffuse
RS2200 - Rio Sub 2.2	5 - 2800K	
	9 - 3700K	
	6 - RGB	

Job Name/Date:

Fixture Type Designation:



RIO SUB 2 SERIES

RIO SUB 2.1, 2.2

TECHNICAL DATA


	RIO SUB 2.1		RIO SUB 2.2	
	WHITE	RGB	WHITE	RGB
Wattage	10W	8.5W	19W	17W
Delivered Lumens (2800K)	290 lm	100 lm	580 lm	200 lm
Fixture Dim. (l,w,h)	20.08" x 1.46" x 2.40"		39.76" x 1.46" x 2.40"	
Cut-Out Size (l,w)	2.68" x 21.46"		2.68" x 41.14"	
Fixture Weight	3.02 lbs		6.00 lbs	

Fixture Dimensions

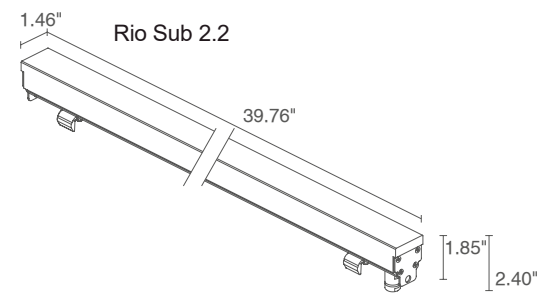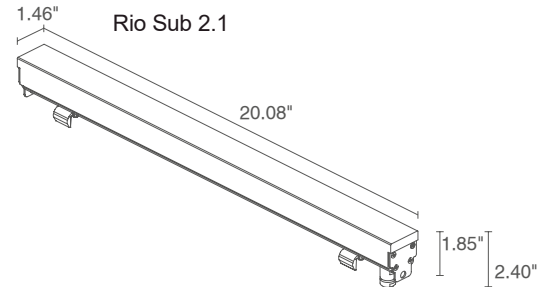

ACCESSORIES

Installation



Stainless Steel
Outer Casing REQUIRED
WC8651 - Rio Sub 2.1 (L 21.46")
WC8652 - Rio Sub 2.2 (L 41.14")



WN6006 - Extractors (Pair)
 For Outer Casings
 Rio Sub 1.1, Rio Sub 1.2

Job Name/Date:

Fixture Type Designation:

RIO SUB 2 SERIES

RIO SUB 2.1, 2.2

SUGGESTED POWER SUPPLIES

24VDC - FOR USE WITH FOUNTAIN / WATER FEATURES

Part Number	Description	Input/Output	# of Fixtures	
			Rio Sub 2.1	Rio Sub 2.2
FPV-100000024	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-8	1-4
FPV-100100024	0-10V Dimming to 1.0%	120-277VAC to 24VDC, 100W, Class 2	1-8	1-4
FPV-100EL0024	DMX / RDM (Field Addressable) / DALI	120-277VAC to 24VDC, 100W, Class 2	1-8	1-4


RGB, 24VDC - FOR USE WITH FOUNTAIN / WATER FEATURES

Part Number	Description	Input/Output	# of Fixtures / Power Supply	
			Rio Sub 2.1	Rio Sub 2.2
FPV-100EL0024	DMX / RDM (Field Addressable) / Dali	120-277VAC to 24VDC, 100W, Class 2, DRY	1-9	1-4

For other power supply options consult factory.

PHOTOMETRIC DATA

D - Diffuse

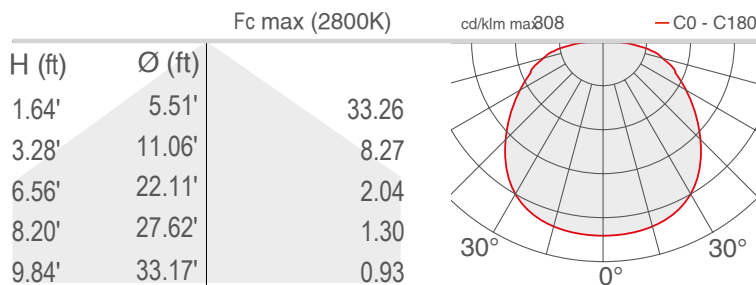

Job Name/Date:

Fixture Type Designation: