

River is a family of outdoor recessed linear profile fixtures for installation in floors or walls. The River family is available in static white, blue or RGBW with a variety of optics options. River 4.0 is available in RGBW with 3 optics options. Drive-over rated to 4,400 lbs.


TECHNICAL DATA

Wattage / Input	30W (48VDC + DMX512 Interface)
Power Supply	Remote, not included. See page 2.
Construction	Body: Anodized Aluminum Alloy EN AW 6060 Lens: Tempered, Transparent Glass
CCT	RGBW
CRI	>80
BUG Rating	B1-U1-G0 (3000K)
Delivered Lumens	2310 lm: (R) 470 lm, (G) 730 lm, (B) 270 lm (W) 840 lm (4000K, 33°)
Efficacy	77 lm/W (4000K, 33°)
Optics	13°, 33°, 47°
Finishes	N/A
Fixture Dimensions	19.69" l x 2.20" w x 4.57" h LED Spacing: 1.97"
Fixture Weight	7.39 lbs
LED Source	10 Power LEDs 4000K, 30 Power LEDs RGB
Lumen Maintenance	L80 >50,000hrs (Ta 25°C)
Operating Temp.	-4°F to +113°F
IP Rating	IP67
IK Rating	IK09
Driveover	4,409 lbs



Cutout Dimensions
for Installation = 2.48" x 19.76"

Fixture Dimensions

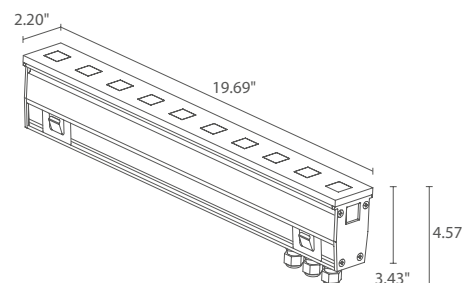

OUTER CASING REQUIRED

ORDERING INFORMATION

Example: RV40007MV. Accessories / Power Supplies ordered separately.

RV4000	7		V
Model No.	CCT	Optics	Finish
RV4000	7 - RGBW	S - 13° M - 33° L - 47°	V - Aluminum

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

48VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00575	Non-Dim	120-277VAC to 48VDC, 45W Class 2	1-1
PPLT00576	Non-Dim	120-277VAC to 48VDC, 60W Class 2	1-1
PPLT00577	Non-Dim	120-277VAC to 48VDC, 96W Class 2	1-2

For other power supply options consult factory.

ACCESSORIES

Installation



WC6050

Outer Casing - **REQUIRED**



WN6005

Alignment kit for
outer casing


Job Name/Date:

Fixture Type Designation:


PHOTOMETRIC DATA

Note all Photometry is 3000K


S - 13°

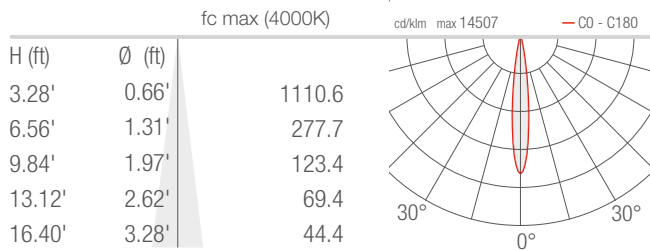

M - 33°

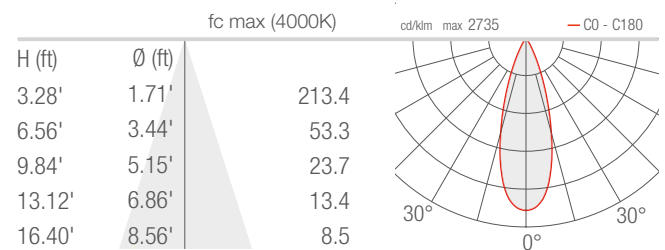

L - 47°

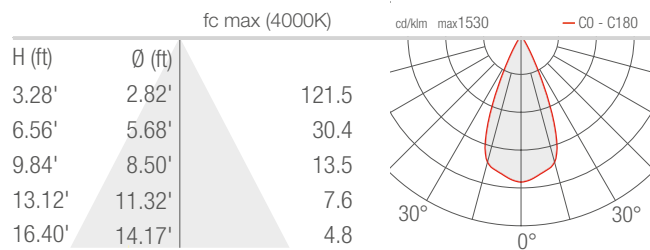

Job Name/Date:

Fixture Type Designation: