


DRIVE-OVER OUTDOOR STEP LIGHTS FOR ORIENTATION LIGHTING IN PATHS AND PARKING AREAS



radial

narrow



2700K 3000K 4000K

Ø3.94 in

Ø6.30 in

SINGLE BEAM



RONDÒ 1.1
2W 24VDC



RONDÒ 3.1
3W 24VDC



RONDÒ 2.1
2W 24VDC

DOUBLE BEAM




RONDÒ 1.2
4W 24VDC



RONDÒ 3.2
5W 24VDC

4 BEAMS



RONDÒ 3.4
8W 24VDC



IP67
SUITABLE FOR OUTDOOR
APPLICATIONS



BUILT-IN PROTECTION SYSTEMS:
IPS
INTELLIGENT PROTECTION SYSTEM



PID
PROTECTIVE IMPEDANCE DEVICE
(RONDÒ 3)



DRIVE-OVER UP
TO 11023 lbs



5-STEP MATERIAL PROTECTION,
AND OXIDATION AND
CORROSION RESISTANCE

Preparation for painting
Epoxy paint
Polyester paint
Paints compliant with Qualicoat automotive coating standard
Salt spray tested (over 1000 hours)



BODY IN AISI 316L
STAINLESS STEEL, MADE
ENTIRELY ON A CNC LATHE

SCREEN IN ANTI-UV
POLYCARBONATE

TAMPER-RESISTANT
SCREW IN AISI 316L
STAINLESS STEEL IN THE
SAME FINISH AS THE FIXTURE



UNIQUE SELLING POINTS



COR-TEN



RAL FINISH
ON REQUEST



ANTHRACITE



STAINLESS STEEL



10° OPTICS




RADIAL OPTICS



DOUBLE BEAM, RADIAL OPTICS

V
RONDÒ 1.2
 3000K, 4W, radial, anthracite
LIRA 1.0
 3000K, 6W, asymmetrical, anthracite
UPDOWN 3.6
 3000K, 6W, 15°, anodized grey
 Project by / arch. Patrik Spreafico
 Plastic Stratosfera, Robbiate, Lecco, Italy

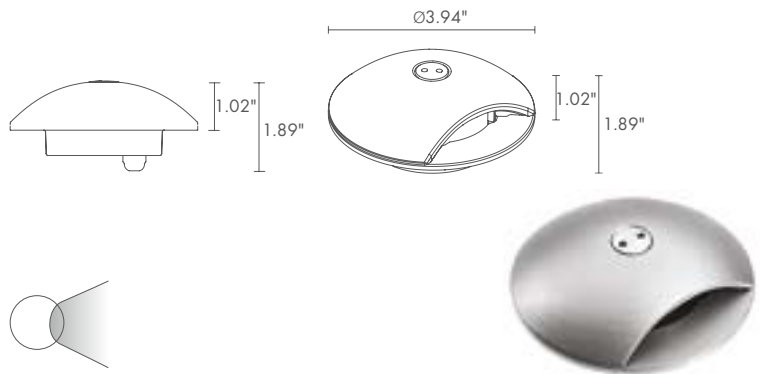


RONDÒ 1.1




POWER / MODEL CODE	2W 24VDC
	RD1100 H - Anthracite
	RD1100 I - Stainless steel
	RD1100 T - Cor-ten
LED COLOR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	S - 10° A - radial
POWER CABLES	includes 4.92 ft neoprene cable H05RN-F 2x0.35/0.75 Ø0.25 in 1 - 16.40 ft 2 - 32.81 ft 3 - 49.21 ft 4 - 65.62 ft

LUMEN OUTPUT AT SOURCE	185 lm (3000K)
DELIVERED LUMEN OUTPUT	65 lm (3000K, radial optics)
NO. AND TYPE OF LED	1 power LED 1/4 ANSI BIN, 50000h L95 B10 (Ta 25°C)
MATERIAL	body in AISI 316L stainless steel lens in Rilsan® Clear
POWER SUPPLY UNIT	remote power supply required, not included
MOUNTING	recessed (ground)
ACCESSORIES	see accessories page

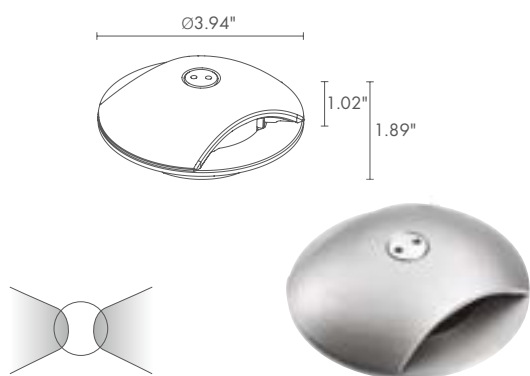

RONDÒ 1.2



4W 24VDC

RD1200 H - Anthracite
RD1200 I - Stainless steel
RD1200 T - Cor-ten

■	F - 2700K 5 - 3000K 9 - 4000K
■	S - 10° A - radial
■	includes 4.92 ft neoprene cable H05RN-F 2x0.35/0.75 Ø0.25 in 1 - 16.40 ft 2 - 32.81 ft 3 - 49.21 ft 4 - 65.62 ft

370 lm (3000K)

130 lm (3000K, radial optics)


2 power LEDs
1/4 ANSI BIN, 50000h L95 B10 (Ta 25°C)

body in AISI 316L stainless steel
lens in Rilsan® Clear

remote power supply required, not included

recessed (ground)

see accessories page

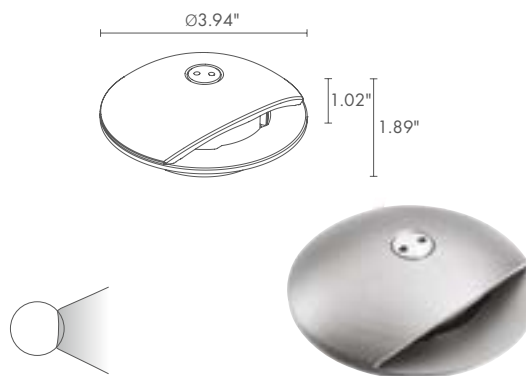

RONDÒ 2.1



2W 24VDC

RD2100 H - Anthracite
RD2100 I - Stainless steel
RD2100 T - Cor-ten

■	F - 2700K 5 - 3000K 9 - 4000K
■	S - 10° A - radial
■	includes 4.92 ft neoprene cable H05RN-F 2x0.35/0.75 Ø0.25 in 1 - 16.40 ft 2 - 32.81 ft 3 - 49.21 ft 4 - 65.62 ft

185 lm (3000K)

85 lm (3000K, radial optics)


1 power LED
1/4 ANSI BIN, 50000h L95 B10 (Ta 25°C)

body in AISI 316L stainless steel
lens in Rilsan® Clear

remote power supply required, not included

recessed (ground)

see accessories page









page 400

RONDÒ 1.1
3000K, 2W, radial optics, stainless steel

Light planning by / IBF Project
Seafront promenade, Tribunj, Croatia

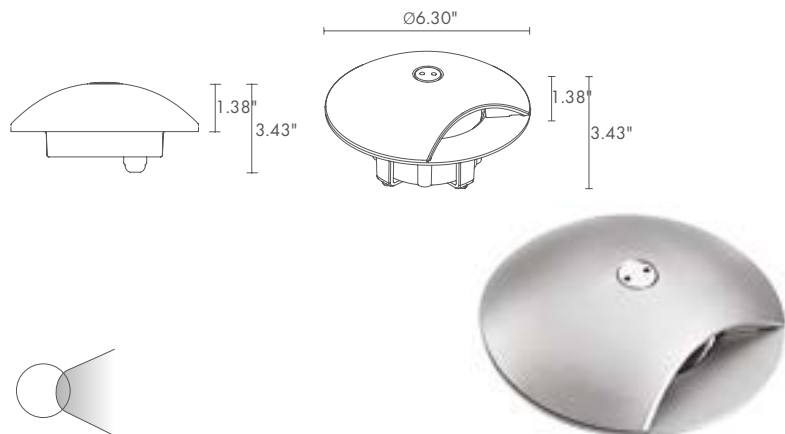

RONDÒ 3.1

CB11023 lbs
kN 50

4.37 lbs IP67 IK08

CASAMBI T max 45°C

POWER / MODEL CODE	3W 24VDC		
	RD3100	   Anthracite	
	RD3100	   Stainless steel	
	RD3100	   Corten	

✓


RONDÒ 3.4
3000K, 8W, radial, stainless steel

Light planning by / Cristian Turra
Private residence, Iseo, Brescia, Italy




 LED COLOR	F - 2700K
	5 - 3000K
	9 - 4000K
 OPTICS	S - 10° A - radial
 POWER CABLES	24Vdc: includes 4.92 ft neoprene cable H05RN-F 2x0.35/0.75 Ø0.25 in 1 - 16.40 ft 2 - 32.81 ft 3 - 49.21 ft 4 - 65.62 ft

LUMEN OUTPUT AT SOURCE	185 lm (3000K)
DELIVERED LUMEN OUTPUT	90 lm (3000K, radial optics)
NO. AND TYPE OF LED	1 power LED 1/4 ANSI BIN, 50000h L95 B10 (Ta 25°C)
MATERIAL	body in AISI 316L stainless steel lens in Rilsan® Clear
POWER SUPPLY UNIT	remote power supply required, not included
MOUNTING	recessed (ground)
ACCESSORIES	see accessories page

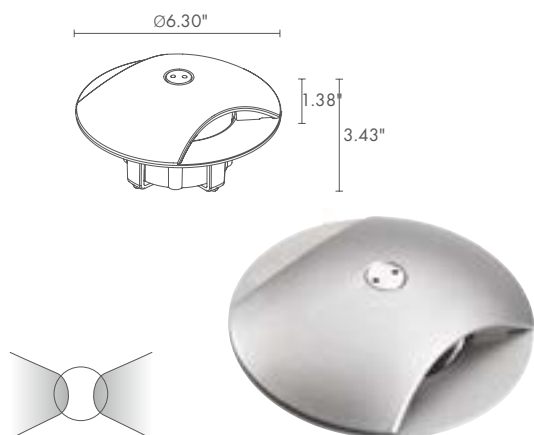


RONDÒ 3.2

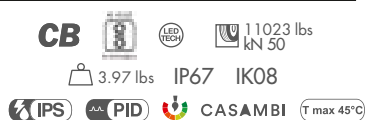


5W 24VDC

RD3200 ■ **H** - Anthracite
RD3200 ■ **I** - Stainless steel
RD3200 ■ **T** - Cor-ten

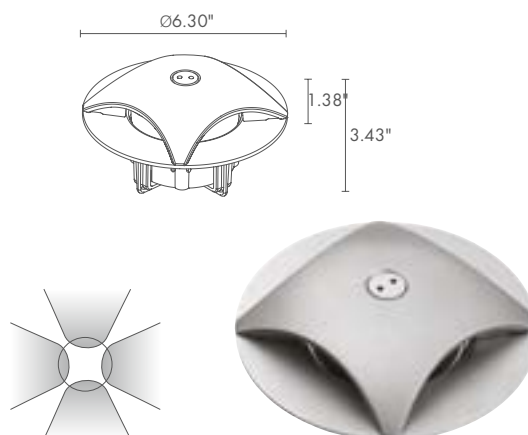

RONDÒ 3.4

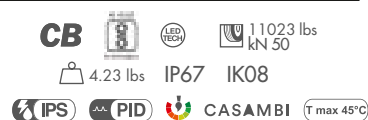

8W 24VDC


RD3400 ■ **H** - Anthracite
RD3400 ■ **I** - Stainless steel
RD3400 ■ **T** - Cor-ten

■	F - 2700K 5 - 3000K 9 - 4000K
■	S - 10° A - radial
■	24Vdc: includes 4.92 ft neoprene cable H05RN-F 2x0.35/0.75 Ø0.25 in 1 - 16.40 ft 2 - 32.81 ft 3 - 49.21 ft 4 - 65.62 ft

■	F - 2700K 5 - 3000K 9 - 4000K
■	S - 10° A - radial
	24Vdc: includes 4.92 ft neoprene cable H05RN-F 2x0.35/0.75 Ø0.25 in

370 lm (3000K)
180 lm (3000K, radial optics)
2 power LEDs 1/4 ANSI BIN, 50000h L95 B10 (Ta 25°C)
body in AISI 316L stainless steel lens in Rilsan® Clear
remote power supply required, not included
recessed (ground)
see accessories page

740 lm (3000K)
360 lm (3000K, radial optics)
4 power LEDs 1/4 ANSI BIN, 50000h L95 B10 (Ta 25°C)
body in AISI 316L stainless steel lens in Rilsan® Clear
remote power supply required, not included
recessed (ground)
see accessories page





ACCESSORIES

ACCESSORIES FOR INSTALLATION



WC0100

Outer casing
(Rondò 1.1 / 1.2 / 2.1)



WC0103

Outer casing
(Rondò 1.1 / 1.2 / 2.1)



WC0150

Outer casing
(Rondò 1.1 / 1.2 / 2.1)



WC0601

Outer casing
(Rondò 3.1 / 3.2 / 3.4)



WC0701

Outer casing
(Rondò 3.1 / 3.2 / 3.4)


< **RONDÒ 1.2**
3000K, 4W, radial, stainless steel

Project by / Studio di Architettura Andrea Abbadessa,
ing. Ignazio Stancanelli, ing. Giuseppe Malatino
Light planning by / Light Style
Maniace-Ortigia, Syracuse, Italy




RONDÒ 1.1

S - 10°

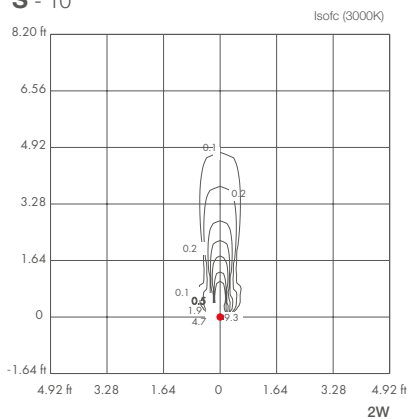


A - Radial

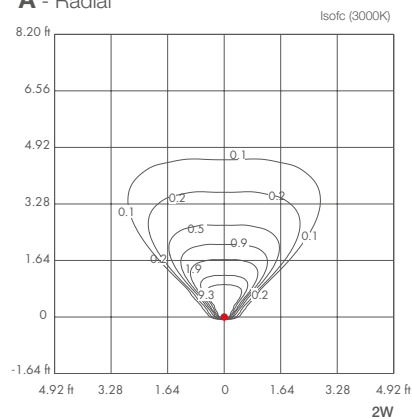


RONDÒ 2.1

S - 10°

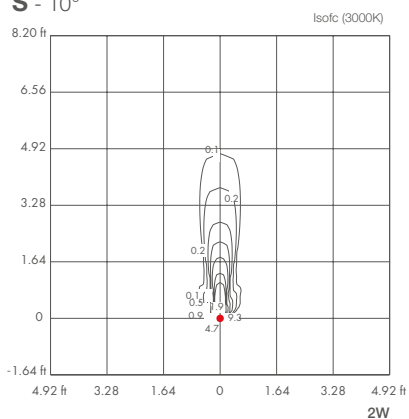


A - Radial

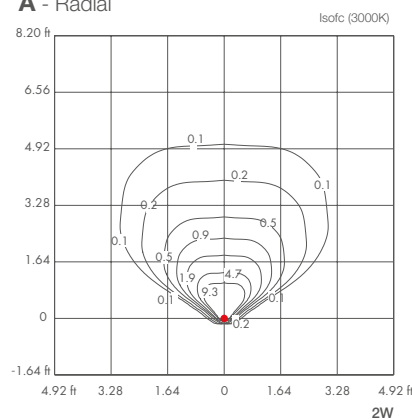

RONDÒ 3.1

S - 10°

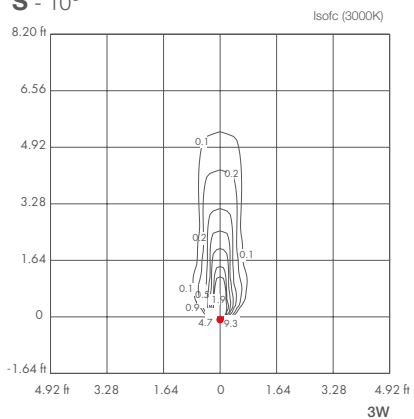

A - Radial

