




601902P

SCOUT MEDIUM

29.5" height bollard, rectangular section, for outdoor surface installation, floor washer 180° light distribution, phospho-chromatized and polyester powder coated extruded copper-free aluminum body, frosted glass diffuser, molded silicone gasket and stainless steel screws. Remote driver required, not included. 14 mid-power CREE XH-G LED. IP65 rating.

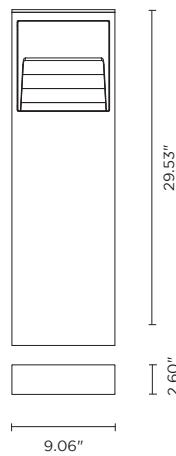

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
mid-power led	180°	650	81.25
4000°K neutral-white			
mid-power led	180°	665	83.13

Finish color options:

 Textured Grey
RAL 9006

 Anthracite Grey
RAL 7016

 Matte Black
(on request)

Technical features

 IP65  IK08

Technical data

Wattage	8 WATT
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance extruded copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	NR. 14 x CREE XH-G LED
Screws	Stainless steel
Transformer	Electrical power supply Remote driver required, not included
Gasket	Silicone rubber
Diffuser	Tempered glass
Gross weight	15.43 lbs

