

SQ1 is a vandal resistant linear surface mounted LED luminaire that comes in a 4 foot length and is suitable for continuous row mounting. It is available in 3 color temperatures and 3 standard finishes.



**MADE IN THE U.S.A.**  
Complies with LM79 and LM80  
Complies with ARRA level III

Fixture Dimensions  
See Drawing on page 2.

## TECHNICAL DATA

<b>Wattage / Input</b>	7W per foot, 28W per row (120-277VAC)
<b>Power Supply</b>	Integral 0-10V Dimming
<b>Construction</b>	Body: Extruded Aluminum Ends: Die-Cast Aluminum Lens: Opal Polycarbonate
<b>CCT</b>	3000K, 3500K, 5000K
<b>CRI</b>	>90
<b>Total Lumens</b>	1410 lm per row (3500K)
<b>Efficacy</b>	50.5 lm/W
<b>Finishes</b>	3 Standard, Custom RAL. See Below.
<b>Fixture Dimensions</b>	4'0" l x 5.90" w x 3.30" h
<b>IP Rating</b>	IP65
<b>IK Rating</b>	IK10++

*Pendant Mount available on request*

## ORDERING INFORMATION


Example: SQ1-L-4-130-0-02-C-X-0.

SQ1-L	-	4	-		-	0	-		-	C	-	X	-	
Model #	Length	CCT	Body	Finish	Driver	Lens	Options							
SQ1-L	4 - 4'0"	<b>Single Row LEDs:</b> 130 - 3000K 135 - 3500K 150 - 5000K <b>Two Row LEDs:</b> 230 - 3000K 235 - 3500K 250 - 5000K	0 - Surface Mount 2 Conduit Entries	02 - Black Suede EW - Euro White TS - Silver 99 - Custom	C - 120-277VAC 0-10V Dimming Integral Driver	X - Opal Polycarbonate	0 - None 4 - One Circuit Fusing 8 - Special Screws <i>(Please specify)</i>							

Job Name/Date:

Fixture Type Designation:


## FIXTURE DIMENSIONS

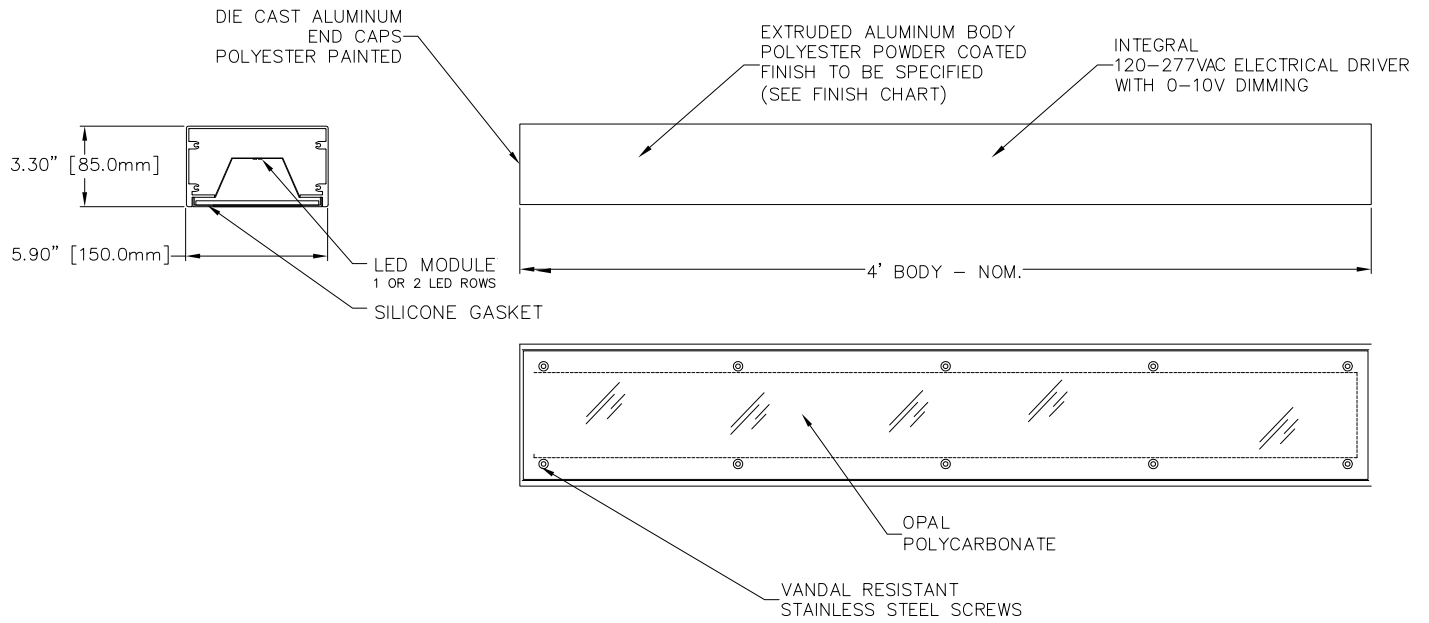

## PHOTOMETRIC DATA

Note: Photometry is 3500K

Maximum Candela = 982

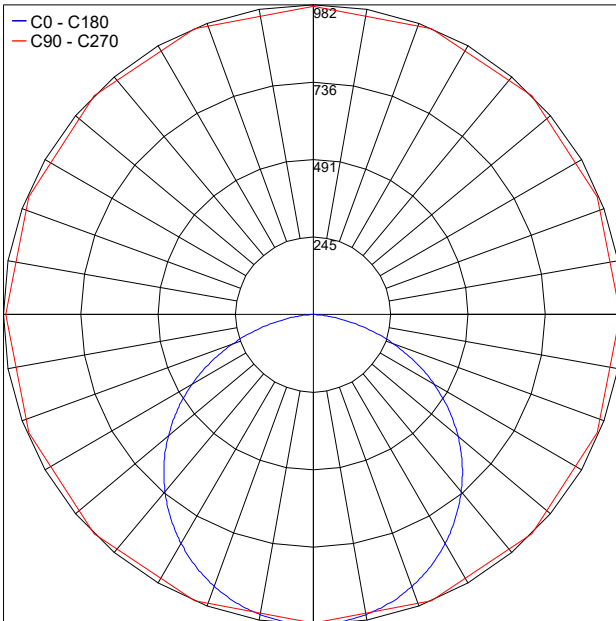

PHOTOMETRIC FILENAME : SQUARE 1 LED 3500K 4FT 55W.IES

Job Name/Date:

Fixture Type Designation: