

SCOUT MEDIUM


Scout Medium is an IP65-rated, 29.5" height, rectangular bollard for outdoor surface installation with a floor washer 180° light distribution. It is available in 2 color temperatures and 2 standard finishes.



TECHNICAL DATA

Wattage / Input	8W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Extruded Copper-Free Aluminum Lens: Frosted Glass Diffuser
CCT	3000K, 4000K
BUG Rating	B0-U2-G0
Delivered Lumens	650 lm (3000K)
Efficacy	81.3 lm/W
Optics	180°
Finishes	Textured Gray, Anthracite Gray, Matte Black (on request)
Fixture Dimensions	9.06" w x 29.53" h
LED Source	14 Mid-Power CREE XH-G LED
Fixture Weight	15.43 lbs
IP Rating	IP65
IK Rating	IK08

Fixture Dimensions

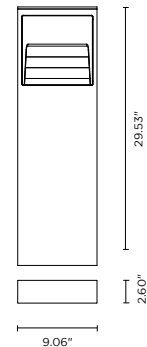

ORDERING INFORMATION

Example: 601902P-30K-AG. Power Supplies ordered separately.

601902P	-		-	
Model No.	CCT	Finish		
601902P	30K - 3000K 40K - 4000K	TG - Textured Gray AG - Anthracite Gray MB - Matte Black (on request)		

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00149	Non-Dim	120VAC to 24VDC, 10W, Class 2, IP65	1-1
PPLT00056	Non-Dim	120-277VAC to 24VDC, 26W, Class 2, IP66	1-2
PPLT00155	Non-Dim	120VAC to 24VDC, 30W, Class 2	1-3
PPLT00586	Non-Dim	120-277VAC to 24VDC, 40W, Class 2	1-4
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-10
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-10

Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00273	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-4
PPLT00530	L3D0	L3D0	100%-0.1%	Hi-Lume™ Premier 0.1% or Ecosystem 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-9

For other power supply options consult factory.

PHOTOMETRIC DATA

Note: all photometry is 3000K

Maximum Candela = 155.6

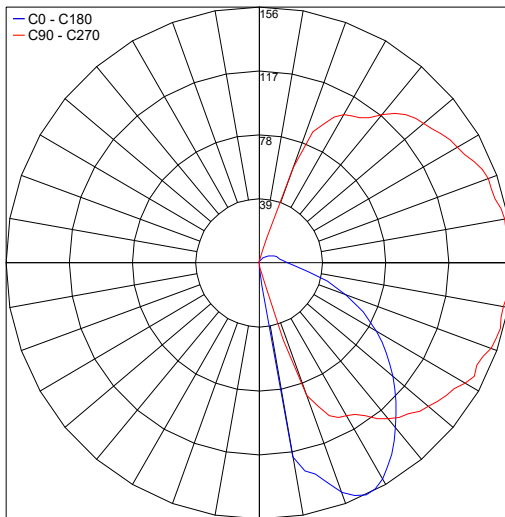

PHOTOMETRIC FILENAME : SCOUT MEDIUM 3000K 8W.IES

Job Name/Date:

Fixture Type Designation: