

# SCOUT MEDIUM


Scout Medium is an IP65-rated, 29.5" height, rectangular bollard for outdoor surface installation with a floor washer 180° light distribution. It is available in 2 color temperatures and 2 standard finishes.



## TECHNICAL DATA

<b>Wattage / Input</b>	8W (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Extruded Copper-Free Aluminum Lens: Frosted Glass Diffuser
<b>CCT</b>	3000K, 4000K
<b>BUG Rating</b>	B0-U2-G0
<b>Delivered Lumens</b>	650 lm (3000K)
<b>Efficacy</b>	81.3 lm/W
<b>Optics</b>	180°
<b>Finishes</b>	Textured Gray, Anthracite Gray, Matte Black (on request)
<b>Fixture Dimensions</b>	9.06" w x 29.53" h
<b>LED Source</b>	14 Mid-Power CREE XH-G LED
<b>Fixture Weight</b>	15.43 lbs
<b>IP Rating</b>	IP65
<b>IK Rating</b>	IK08

Fixture Dimensions

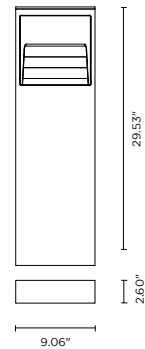

## ORDERING INFORMATION

Example: 601902P-30K-AG. Power Supplies ordered separately.

601902P	-		-	
<b>Model No.</b>	<b>CCT</b>	<b>Finish</b>		
601902P	30K - 3000K 40K - 4000K	<b>TG</b> - Textured Gray <b>AG</b> - Anthracite Gray <b>MB</b> - Matte Black (on request)		

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00149</a>	Non-Dim	120VAC to 24VDC, 10W, Class 2, IP65	1-1
<a href="#">PPLT00155</a>	Non-Dim	120VAC to 24VDC, 30W, Class 2	1-3
<a href="#">PPLT00586</a>	Non-Dim	120-277VAC to 24VDC, 40W, Class 2	1-4
<a href="#">PPLT00709</a>	ELV/TRIAC & 0-10V Dimming to 5% and OFF	120-277VAC to 24VDC, 96W, Class 2, DAMP	1-9
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-10

## Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00273</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-4
<a href="#">PPLT00530</a>	L3D0	L3D0	100%-0.1%	Hi-Lume™ Premier 0.1% or Ecosystem 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-9

For other power supply options consult factory.

## PHOTOMETRIC DATA

Note: all photometry is 3000K

Maximum Candela = 155.6

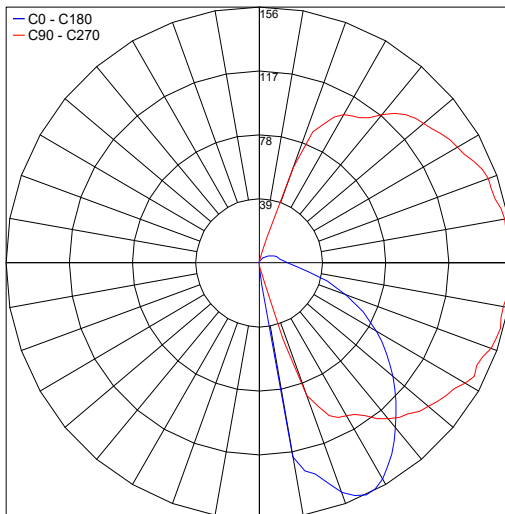

PHOTOMETRIC FILENAME : SCOUT MEDIUM 3000K 8W.IES

Job Name/Date:

Fixture Type Designation: