


Scout Medium is an IP65-rated, 29.5" height, rectangular bollard for outdoor surface installation with a floor washer 180° light distribution. It is available in 2 color temperatures and 2 standard finishes.

TECHNICAL DATA

Wattage / Input	8W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Extruded Copper-Free Aluminum Lens: Frosted Glass Diffuser
CCT	3000K, 4000K
BUG Rating	B0-U2-G0
Delivered Lumens	650 lm (3000K)
Efficacy	81.3 lm/W
Optics	180°
Finishes	Textured Gray, Anthracite Gray, Matte Black (on request)
Fixture Dimensions	9.06" w x 29.53" h
LED Source	14 Mid-Power CREE XH-G LED
Fixture Weight	15.43 lbs
IP Rating	IP65
IK Rating	IK08



Fixture Dimensions



ORDERING INFORMATION

Example: 601902P-30K-AG. Power Supplies ordered separately.

601902P	-	-
Model No.	CCT	Finish
601902P	30K - 3000K 40K - 4000K	TG - Textured Gray AG - Anthracite Gray MB - Matte Black (on request)

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, DAMP	1-10
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	2-10

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3D0	L3D0	100%-0.1%	Hi-Lume™ Premier 0.1% or Ecosystem 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-9

DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715


Part Number	Description	Input/Output	# of Fixtures 8W
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-9

For other power supply options consult factory.

PHOTOMETRIC DATA

Note: all photometry is 3000K

Maximum Candela = 155.6

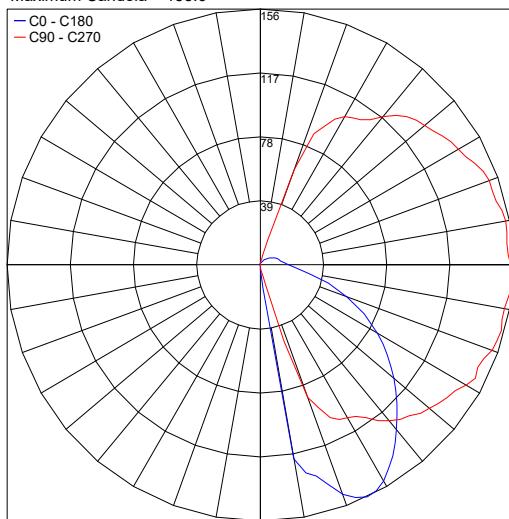

PHOTOMETRIC FILENAME : SCOUT MEDIUM 3000K 8W.IES

Job Name/Date:

Fixture Type Designation: