



Scout Mini is an IP65-rated, 27.6" height, rectangular bollard for outdoor surface installation with a floor washer 180° light distribution. It is available in 2 color temperatures and 2 standard finishes.

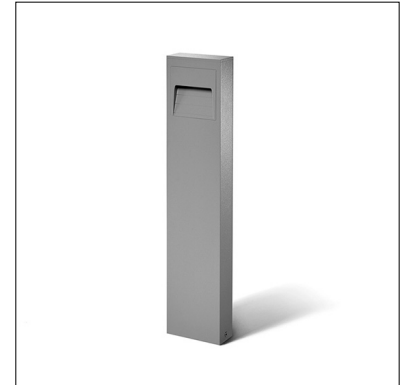

TECHNICAL DATA

Wattage / Input	4W (350mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: Extruded Copper-Free Aluminum Lens: Frosted Glass Diffuser
CCT	3000K, 4000K
BUG Rating	B0-U1-G0
Delivered Lumens	350 lm (3000K)
Efficacy	87.5 lm/W
Optics	180°
Finishes	Textured Gray, Anthracite Gray, Matte Black (on request)
Fixture Dimensions	5.91" w x 27.56" h
LED Source	6 Mid-Power CREE XH-G LED
Fixture Weight	9.92 lbs
IP Rating	IP65
IK Rating	IK08

Fixture Dimensions

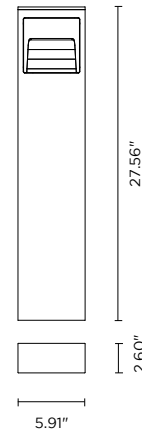

ORDERING INFORMATION

Example: 601901P-30K-AG. Power Supplies ordered separately.

601901P	-		-	
Model No.	CCT	Finish		
601901P	30K - 3000K 40K - 4000K	TG - Textured Gray AG - Anthracite Gray MB - Matte Black (on request)		

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA


Part Number	Description	Input/Output	# of Fixtures
PPLT00138	0-10V Dimming to 10%	120-277VAC to 350mA, 4W, Class 2	1-1
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 10W, Class 2	1-2
PPLT00468	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	3-3
PPLT00308-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 30W, Class 2	1-5
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2	1-5
PPLT00538-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-20

For other power supply options consult factory.

PHOTOMETRIC DATA

Note: all photometry is 3000K

Maximum Candela = 91.9

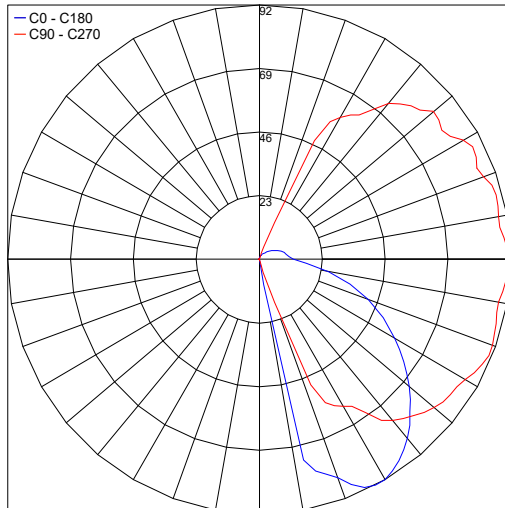

PHOTOMETRIC FILENAME : SCOUT MINI 3000K 4W.IES

Job Name/Date:

Fixture Type Designation: