

SECTOR 380


Sector 380 is a 15" height round bollard for outdoor surface installation with the option of 1 to 4 light windows: 90°, 180° (or 90° + 90°), 270°, 360°. It is available in 2 color temperatures and 2 standard finishes.



TECHNICAL DATA

Wattage / Input	6W, 12W, 18W, 24W (120VAC)
Power Supply	Integral (0-10V Dimming)
Construction	Body: Extruded Copper-Free Aluminum Lens: Opaline Tempered Glass Cable Length: 3.28'
CCT	3000K, 4000K
BUG Rating	B0-U2-G1 (6W, 3000K) B0-U3-G1 (24W, 3000K)
Delivered Lumens	553 lm (6W, 3000K) 1067 lm (12W, 3000K) 1600 lm (18W, 3000K) 2134 lm (24W, 3000K)
Efficacy	92.2 lm/W (6W, 3000K) 88.9 lm/W (12W, 18W, 24W, 3000K)
Optics	90°, 180° (or 90° + 90°), 270°, 360°
Finishes	Textured Gray, Anthracite Gray, Matte Black (on request)
Fixture Dimensions	Ø5.91" x 14.94"
LED Source	1 x CREE XHP70 LED
Fixture Weight	9.92 lbs
IP Rating	IP66
IK Rating	IK10

Fixture Dimensions

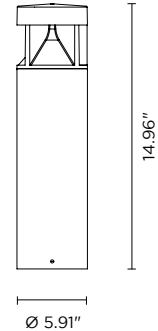

ORDERING INFORMATION


Example: 601702P-30K-AG. Accessories ordered separately.

<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>
Model No.		CCT		Finish
601701P (6W, 90°)		30K - 3000K		TG - Textured Gray
601702P (12W, 180° or 90°x90°)		40K - 4000K		AG - Anthracite Gray
601703P (18W, 270°)				MB - Matte Black (on request)
601704P (24W, 360°)				


Job Name/Date:

Fixture Type Designation:

LIGHT DISTRIBUTIONS

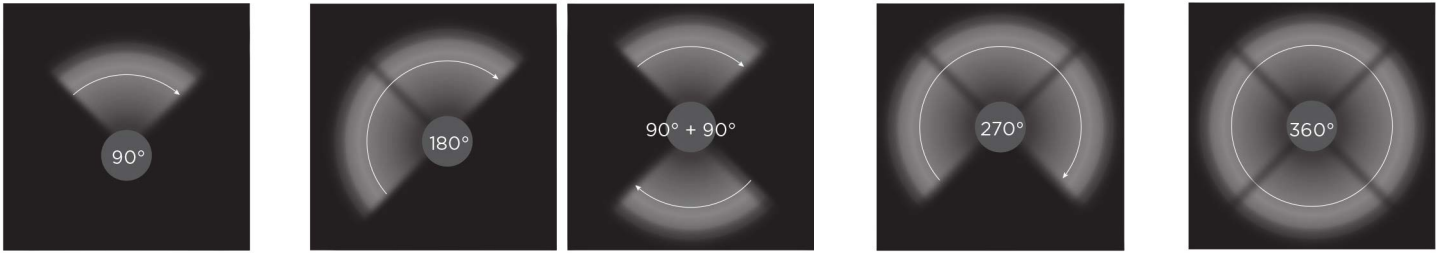

ACCESSORIES - Installation

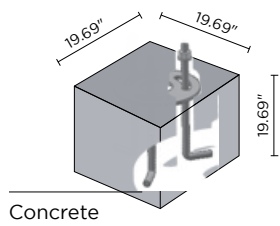


AC053
Base Plate

PHOTOMETRIC DATA


Note: all photometry is 3000K

Maximum Candela = 186.8

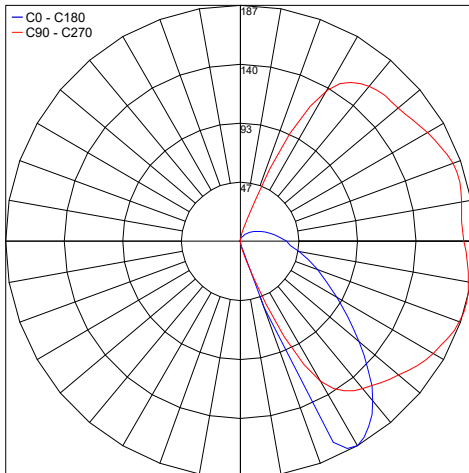

PHOTOMETRIC FILENAME : SECTOR 380 3000K 6W - 601701P.IES

Maximum Candela = 267.9

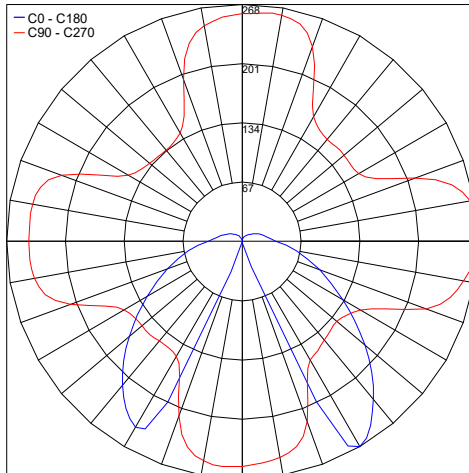

PHOTOMETRIC FILENAME : SECTOR 380 3000K 24W - 601704P.IES

Job Name/Date:

Fixture Type Designation: