

Simply 1.0 is a recessed uplight for indoor use in floors, ceilings or walls. It is walkover rated with white or blue color options and diffuse optics.


TECHNICAL DATA

Wattage / Input	1W (220mA)
Power Supply	Remote, not included. See page 2.
Construction	Body/Trim: Anodized Aluminum Alloy Lens: Opal Polycarbonate
CCT	2700K, 3000K, 4000K, 5000K, Blue
CRI	>80
Delivered Lumens	37 lm (3000K)
Efficacy	37 lm/W (3000K)
Optics	Diffuse
Finishes	Chrome, Pearl Chrome
Fixture Dimensions	Ø1.38" x 0.39" h
Cut-out Size	Ø1.10" (for ceiling or wall installations)
Fixture Weight	0.20 lbs
LED Source	1 Power LED
Lumen Maintenance	L95, B10 >50,000hrs (Ta 25°C)
Color Consistency	1/4 ANSI BIN
Operating Temp.	-4°F to +113°F
IP Rating	IP44
IK Rating	-



Cutout Dimensions for ceiling/wall installations with fixing spring = Ø 1.10"

Fixture Dimensions



ORDERING INFORMATION

Example: SM10115DC. Power Supplies ordered separately.

SM1011			
Model No.	CCT	Optics	Finish
SM1011	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - Blue	D - Diffuse	C - Chrome P - Pearl Chrome

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES


220mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 220mA, 10W, Class 2	1-10
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 220mA, 20W, Class 2	1-18
PPLT00168-P	0-10V Dimming to 1.0%	120-277VAC to 220mA, 50W, Class 2	1-36
PPLT00538-P	0-10V Dimming to 0.1%	120-277VAC to 220mA, 100W, Class 2	1-76

For other power supply options consult factory.

PHOTOMETRIC DATA

Note all Photometry is 3000K

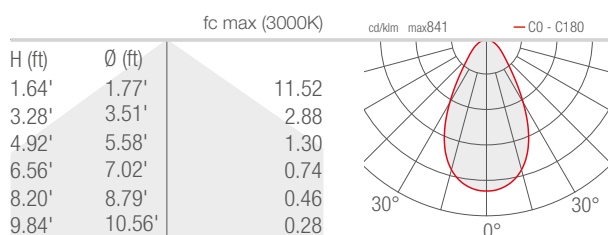D - Diffuse

Job Name/Date:

Fixture Type Designation: