


Siri is a line of spotlights for indoor and outdoor applications with outstanding design featuring rounded angles. The scaled and adjustable bracket allows multiple installations on ceiling, wall, and floor.



## TECHNICAL DATA

|                           |   |
|---------------------------|---|
| <b>Wattage / Input</b>    | 11W (24VDC)   |
| <b>Power Supply</b>       | Remote, not included. See page 2.   |
| <b>Construction</b>       | Body: Die-Cast Aluminum<br>Lens: Tempered, Serigraphed Extra-Clear Glass<br>Cable Length: 4.92' |
| <b>CCT</b>                | RGBW (4000K)  |
| <b>CRI</b>                | >80   |
| <b>BUG Rating</b>         | B0-U1-G0 (58°, 30° x 60°, 60° x 30°)<br>B1-U1-G0 (21°, 32°)                                     |
| <b>Delivered Lumens</b>   | 379 lm: (R) 59 lm, (G) 105 lm, (B) 42 lm, (W) 173 lm  |
| <b>Efficacy</b>           | 34.5 lm/W (32°)   |
| <b>Optics</b>             | 5 Standard (see below)  |
| <b>Finishes</b>           | 4 Standard, Custom RAL (see below)  |
| <b>Fixture Dimensions</b> | 9.45" l x 3.54" w x 2.28" h   |
| <b>Fixture Weight</b>     | 1.72 lbs  |
| <b>LED Source</b>         | 2 LED RGBW groups   |
| <b>Lumen Maintenance</b>  | L90, B10 >50,000hrs (Ta 25°C)   |
| <b>Color Consistency</b>  | -   |
| <b>Operating Temp.</b>    | -4°F to +113°F  |
| <b>IP Rating</b>          | IP66  |
| <b>Impact Rating</b>      | IK07  |

Fixture Dimensions

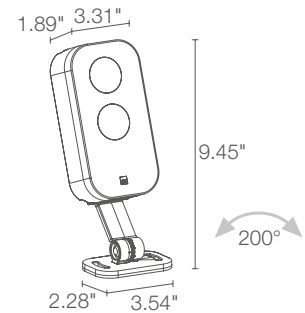

## ORDERING INFORMATION

Example: SR12007ME. Accessories / Power Supplies ordered separately.

| SR1200    | 7        |  |   |
|-----------|----------|--|---|
| Model No. | CCT      | Optics   | Finish  |
| SR1200    | 7 - RGBW | <b>S</b> - 21°<br><b>M</b> - 32°<br><b>L</b> - 58°<br><b>W</b> - 30° x 60°<br><b>X</b> - 60° x 30° | <b>E</b> - White<br><b>F</b> - Gray<br><b>H</b> - Anthracite<br><b>T</b> - Cor-ten<br><b>C</b> - Custom RAL<br><i>(Consult factory for "C")</i> |

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC - RGBW

| Part Number               | Description              | Input/Output                       | # of Fixtures |
|---------------------------|--------------------------|------------------------------------|---------------|
| <a href="#">PPLT00288</a> | DMX / RDM / DALI / 0-10V | 120-277VAC to 24VDC, 100W, Class 2 | 1-4           |

For other power supply options consult factory.

## ACCESSORIES

### Installation



#### WP0300

Ground Spike

## ACCESSORIES

### Anti-Glare



#### WB5010H

Anti-glare hood - Anthracite finish

On request the finish can match the fixture


Job Name/Date:

Fixture Type Designation:


## PHOTOMETRIC DATA

Note all Photometry is 3000K


### S - 21°

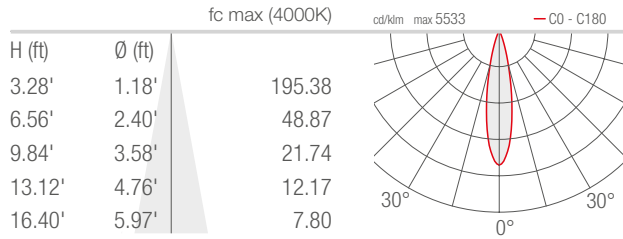


### M - 32°

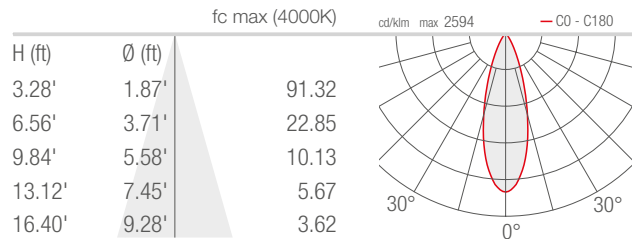


### L - 58°

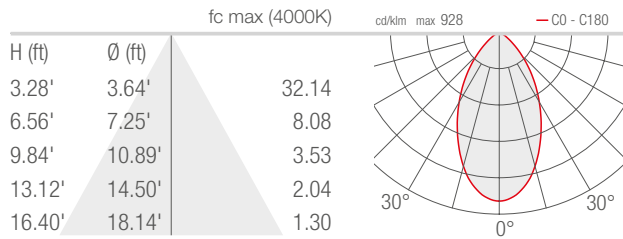

### W - 30°x60°

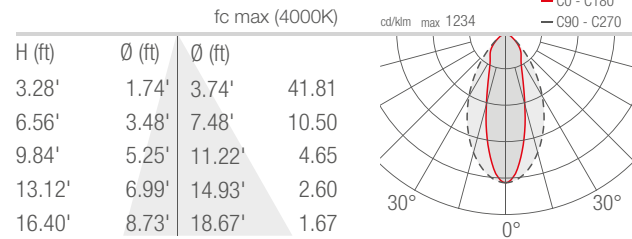

### X - 60°x30°

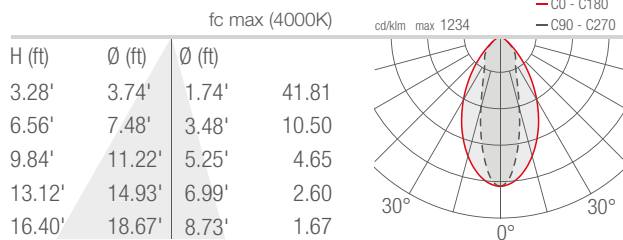

Job Name/Date:

Fixture Type Designation: