


Siri is a line of spotlights for indoor and outdoor applications with outstanding design featuring rounded angles. The scaled and adjustable bracket allows multiple installations on ceiling, wall, and floor.



## TECHNICAL DATA

<b>Wattage / Input</b>	16W (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Die-Cast Aluminum Lens: Tempered, Serigraphed Extra-Clear Glass Cable Length: 4.92'
<b>CCT</b>	2700K, 3000K, 4000K, 5000K
<b>CRI</b>	>80
<b>Delivered Lumens</b>	925 lm (3000K, 30°)
<b>Efficacy</b>	57.8 lm/W (3000K, 30°)
<b>Optics</b>	5 Standard (see below)
<b>Finishes</b>	4 Standard, Custom RAL (see below)
<b>Fixture Dimensions</b>	2.28" l x 4.84" w x 10.00" h
<b>Fixture Weight</b>	3.53 lbs
<b>LED Source</b>	4 Power LEDs
<b>Lumen Maintenance</b>	L95, B10 >50,000hrs (Ta 25°C)
<b>Color Consistency</b>	1/4 ANSI BIN
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP66
<b>Impact Rating</b>	IK06

Fixture Dimensions

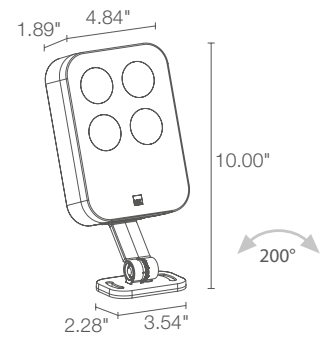

## ORDERING INFORMATION

*Example: SR20105ME or SR20105ME-1. Accessories / Power Supplies ordered separately.*

SR2010				-	
Model No.	CCT	Optics	Finish	Cable Length	
SR2010	F - 2700K	V - 6°	E - White	4.92' standard	
	5 - 3000K	S - 12°	F - Gray	1 - 16.40'	
	9 - 4000K	M - 30°	H - Anthracite	2 - 32.81'	
	0 - 5000K	L - 40°	T - Cor-ten	3 - 49.21'	
		W - 10° x 45°	C - Custom RAL <i>(Consult factory for "C")</i>	4 - 65.62'	

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00056</a>	Non-Dim	120-277VAC to 24VDC, 26W, Class 2	1-1
<a href="#">PPLT00157</a>	Non-Dim	120VAC to 24VDC, 60W, Class 2	1-3
<a href="#">PPLT00599</a>	ELV / TRIAC & 0-10V Dimming (100 to 0%)	120-277VAC to 24VDC, 96W, Class 2	1-4
<a href="#">PPLT00284</a>	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-5
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-5

For other power supply options consult factory.

## ACCESSORIES


### Installation



**WP0300**  
Ground Spike

## ACCESSORIES

### Anti-Glare



**WH5020**  
Honeycomb Louvre  
Not available for 6° optic



**WB5020H**  
Anti-glare hood - Anthracite finish  
On request the finish can match the fixture


Job Name/Date:

Fixture Type Designation:


## PHOTOMETRIC DATA

Note all Photometry is 3000K


### V - 6°

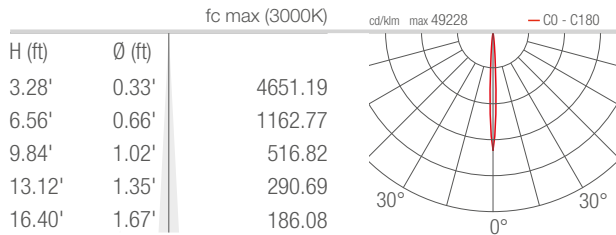


### S - 12°

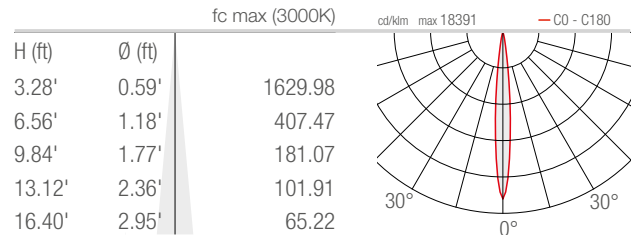


### M - 30°

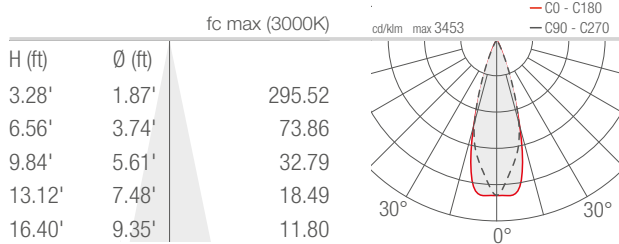

### L - 40°

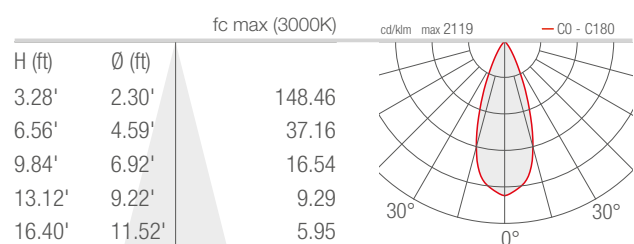

### W - 10°x45°

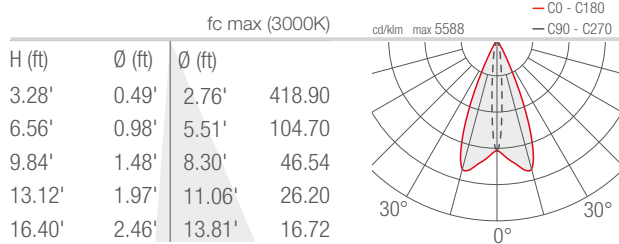

Job Name/Date:

Fixture Type Designation: