


Siri is a line of spotlights for indoor and outdoor applications with outstanding design featuring rounded angles. The scaled and adjustable bracket allows multiple installations on ceiling, wall, and floor.

## TECHNICAL DATA

|                           |   |
|---------------------------|---|
| <b>Wattage / Input</b>    | 23W (24VDC)   |
| <b>Power Supply</b>       | Remote, not included. See page 2.   |
| <b>Construction</b>       | Body: Die-Cast Aluminum<br>Lens: Tempered, Serigraphed Extra-Clear Glass<br>Cable Length: 4.92' |
| <b>CCT</b>                | 2700K, 3000K, 4000K, 5000K  |
| <b>CRI</b>                | >80   |
| <b>BUG Rating</b>         | B2-U0-G0 (3000K)  |
| <b>Delivered Lumens</b>   | 1491 lm (3000K, 30°)  |
| <b>Efficacy</b>           | 64.8 lm/W (3000K, 30°)  |
| <b>Optics</b>             | 5 Standard (see below)  |
| <b>Finishes</b>           | 4 Standard, Custom RAL (see below)  |
| <b>Fixture Dimensions</b> | 1.89" l x 7.44" w x 11.14" h  |
| <b>Fixture Weight</b>     | 4.63 lbs  |
| <b>LED Source</b>         | 9 Power LEDs  |
| <b>Lumen Maintenance</b>  | L95, B10 >50,000hrs (Ta 25°C)   |
| <b>Color Consistency</b>  | 1/4 ANSI BIN  |
| <b>Operating Temp.</b>    | -4°F to +113°F  |
| <b>IP Rating</b>          | IP66  |
| <b>Impact Rating</b>      | IK06  |



Fixture Dimensions

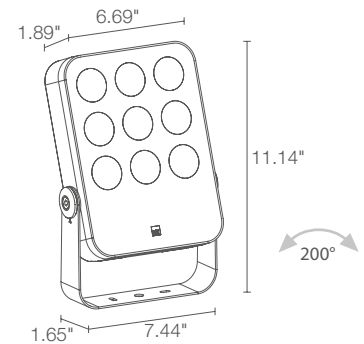

## ORDERING INFORMATION

Example: SR30105ME or SR30105ME-1 Accessories / Power Supplies ordered separately.

| SR3010    |  |  |  |  |
|-----------|--|--|--|--|
| Model No. | CCT  | Optics   | Finish   | Cable Length   |
| SR3010    | F - 2700K<br>5 - 3000K<br>9 - 4000K<br>0 - 5000K | V - 6°<br>S - 12°<br>M - 30°<br>L - 40°<br>W - 10° x 45° | E - White<br>F - Gray<br>H - Anthracite<br>T - Cor-ten<br>C - Custom RAL<br><i>(Consult factory for "C")</i> | 4.92' standard<br>1 - 16.40'<br>2 - 32.81'<br>3 - 49.21'<br>4 - 65.62' |

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

| Part Number               | Description   | Input/Output                       | # of Fixtures |
|---------------------------|---|------------------------------------|---------------|
| <a href="#">PPLT00155</a> | Non-Dim   | 120VAC to 24VDC, 30W, Class 2      | 1-1           |
| <a href="#">PPLT00586</a> | Non-Dim   | 120-277VAC to 24VDC, 40W, Class 2  | 1-1           |
| <a href="#">PPLT00543</a> | 0-10V Dimming to 15% (-40°C / -40°F cold weather start) | 120-277VAC to 24VDC, 100W, Class 2 | 1-3           |

## Suggested Lutron Compatible

| Part Number               | Option         | Lutron SKU | Dim Range | Description  | Input/Output                      | # of Fixtures |
|---------------------------|----------------|------------|-----------|--|-----------------------------------|---------------|
| <a href="#">PPLT00273</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver       | 120-277VAC to 24VDC, 40W, Class 2 | 1-1           |
| <a href="#">PPLT00530</a> | L3D0           | L3D0       | 100%-0.1% | Hi-Lume™ Premier 0.1% or Ecosystem 3-Wire LED Driver | 120-277VAC to 24VDC, 96W, Class 2 | 1-3           |

For other power supply options consult factory.

## ACCESSORIES

### Installation




#### WP0300

Ground Spike

## ACCESSORIES

### Anti-Glare



#### WH5030

Honeycomb Louvre  
Not available for 6° optic



#### WB5030H

Anti-glare hood - Anthracite finish  
On request the finish can match the fixture


Job Name/Date:

Fixture Type Designation:


## PHOTOMETRIC DATA

Note all Photometry is 3000K


### V - 6°

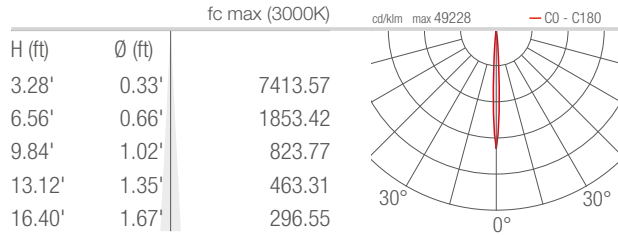


### S - 12°

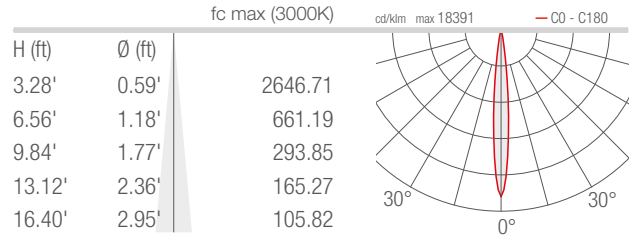


### M - 30°

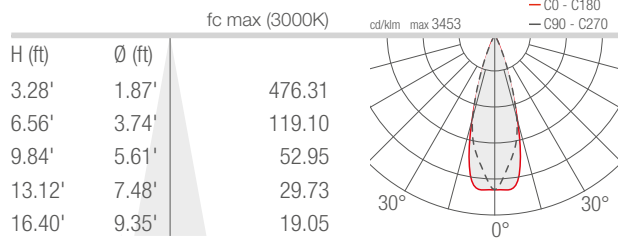

### L - 40°

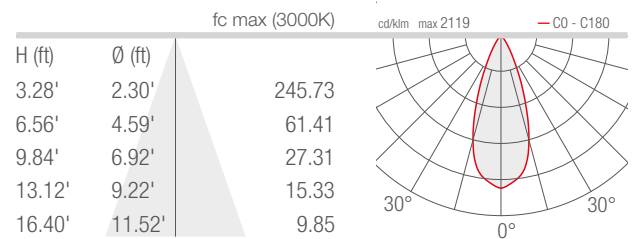

### W - 10°x45°

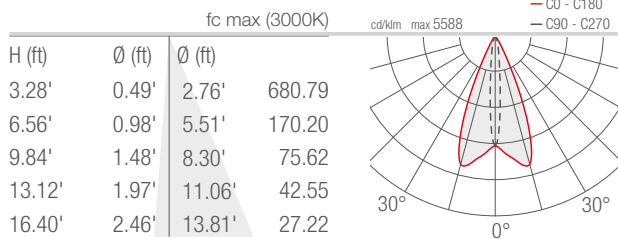

Job Name/Date:

Fixture Type Designation: