

SIRI 3.1


Siri is a line of spotlights for indoor and outdoor applications with outstanding design featuring rounded angles. The scaled and adjustable bracket allows multiple installations on ceiling, wall, and floor.



TECHNICAL DATA

| | |
|---------------------------|---|
| Wattage / Input | 23W (24VDC) |
| Power Supply | Remote, not included. See page 2. |
| Construction | Body: Die-Cast Aluminum Lens: Tempered, Serigraphed Extra-Clear Glass Cable Length: 4.92' |
| CCT | 2700K, 3000K, 4000K, 5000K |
| CRI | >80 |
| BUG Rating | B2-U0-G0 (3000K) |
| Delivered Lumens | 1491 lm (3000K, 30°) |
| Efficacy | 64.8 lm/W (3000K, 30°) |
| Optics | 5 Standard (see below) |
| Finishes | 4 Standard, Custom RAL (see below) |
| Fixture Dimensions | 3.11" l x 6.69" w x 13.31" h |
| Fixture Weight | 5.40 lbs |
| LED Source | 9 Power LEDs |
| Lumen Maintenance | L95, B10 >50,000hrs (Ta 25°C) |
| Color Consistency | 1/4 ANSI BIN |
| Operating Temp. | -4°F to +113°F |
| IP Rating | IP66 |
| Impact Rating | IK06 |

Fixture Dimensions

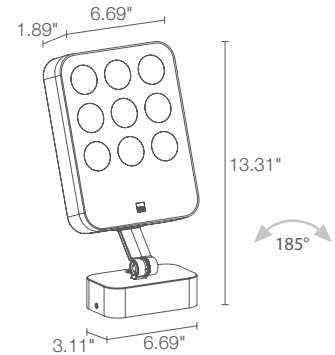

ORDERING INFORMATION

Example: SR31105ME. Accessories / Power Supplies ordered separately.

| SR3110 | | | |
|-----------|--|--|---|
| Model No. | CCT | Optics | Finish |
| SR3110 | F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K | V - 6° S - 12° M - 30° L - 40° W - 10° x 45° | E - White F - Gray H - Anthracite T - Cor-ten C - Custom RAL (Consult factory for "C") |

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

| Part Number | Description | Input/Output | # of Fixtures |
|---------------------------|---|---|---------------|
| PPLT00155 | Non-Dim | 120VAC to 24VDC, 30W, Class 2 | 1-1 |
| PPLT00586 | Non-Dim | 120-277VAC to 24VDC, 40W, Class 2 | 1-1 |
| PPLT00709 | ELV/TRIAC & 0-10V Dimming to 5% and OFF | 120-277VAC to 24VDC, 96W, Class 2, DAMP | 1-3 |
| PPLT00543 | 0-10V Dimming to 15% (-40°C / -40°F cold weather start) | 120-277VAC to 24VDC, 100W, Class 2 | 1-3 |


Suggested Lutron Compatible

| Part Number | Option | Lutron SKU | Dim Range | Description | Input/Output | # of Fixtures |
|---------------------------|----------------|------------|-----------|--|-----------------------------------|---------------|
| PPLT00273 | L3DAE / L3DA3W | L3DA | 100%-1% | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 24VDC, 40W, Class 2 | 1-1 |
| PPLT00530 | L3D0 | L3D0 | 100%-0.1% | Hi-Lume™ Premier 0.1% or Ecosystem 3-Wire LED Driver | 120-277VAC to 24VDC, 96W, Class 2 | 1-3 |

For other power supply options consult factory.

ACCESSORIES

Anti-Glare



WH5030

Honeycomb Louvre

Not available for 6° optic


Job Name/Date:

Fixture Type Designation:


PHOTOMETRIC DATA

Note all Photometry is 3000K


V - 6°

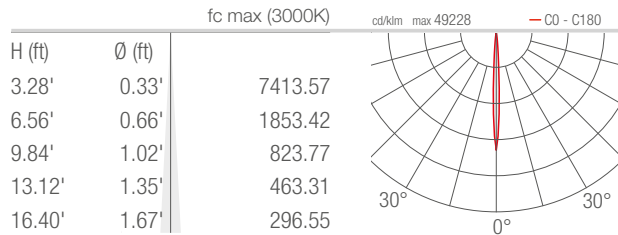


S - 12°

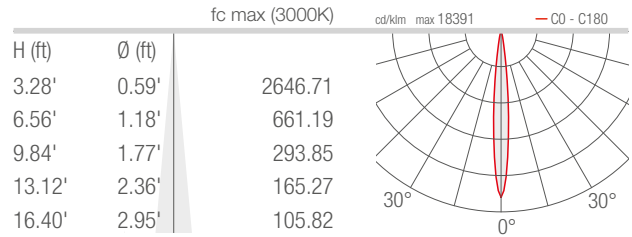


M - 30°

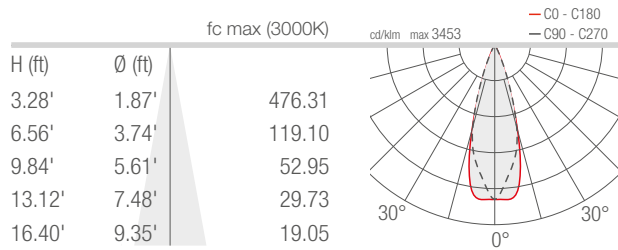

L - 40°

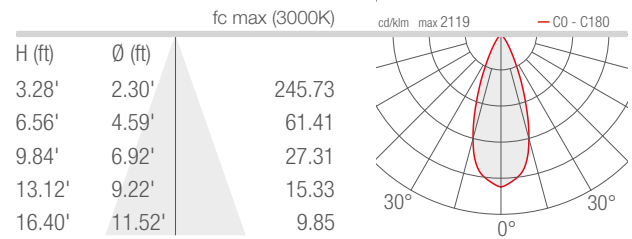

W - 10°x45°

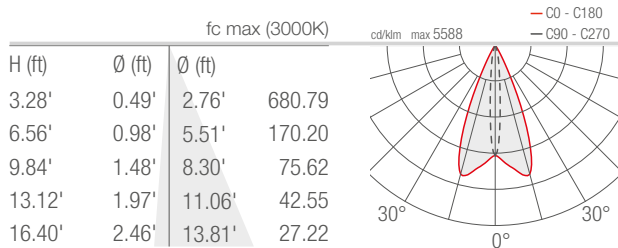

Job Name/Date:

Fixture Type Designation: