

# SIRI BLVD 2.0


Siri Blvd is a line of floodlights suitable for mounting on walls or a pole with a long or short arm. The fixture uses optics perfect for urban lighting situations such as bicycle paths, footpaths and pedestrian areas. Dark Sky compliant for output below 80°.

## TECHNICAL DATA

<b>Wattage / Input</b>	38W (120VAC)
<b>Power Supply</b>	Integral
<b>Construction</b>	Body: Die-Cast Aluminum Alloy EN AB 47100 Lens: Tempered, Serigraphed Extra-Clear Glass
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	>80
<b>Delivered Lumens</b>	2180 lm (3000K, asymmetrical) 2110 lm (3000K, pedestrian zone) 2081 lm (3000K, footpath) 2134 lm (3000K, cycle path) Dark Sky compliant, output below 80°
<b>Efficacy</b>	57.4 lm/W (3000K, asymmetrical) 55.5 lm/W (3000K, pedestrian zone) 54.8 lm/W (3000K, footpath) 56.2 lm/W (3000K, cycle path)
<b>Optics</b>	Pedestrian Zone, Asymmetrical, Footpath, Cycle Path
<b>Finishes</b>	Anthracite, Custom RAL upon request
<b>Fixture Dimensions</b>	7.44" w x 26.77" l x 4.88" h
<b>Pole Mounting</b>	Ø2.36"
<b>Fixture Weight</b>	13.23 lbs
<b>LED Source</b>	4 High-Intensity Power LEDs
<b>Lumen Maintenance</b>	L90, B10 >50,000hrs (Ta 25°C)
<b>Color Consistency</b>	3-Step MacAdam
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP66
<b>Impact Rating</b>	IK06



Fixture Dimensions

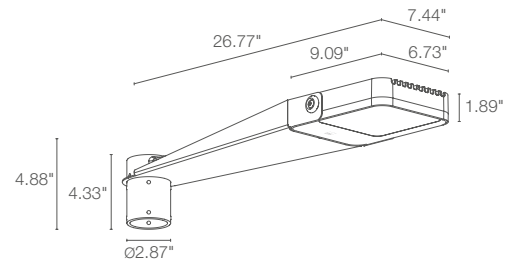

**POLE SUPPLIED BY OTHERS**

## ORDERING INFORMATION

Example: SL2010FAH or SL2010FAHM (with Virtual Midnight control system).

SL2010				
<b>Model No.</b>	<b>CCT</b>	<b>Optics</b>	<b>Finish</b>	<b>Control System</b>
SL2010	F - 2700K 5 - 3000K 9 - 4000K	A - Pedestrian Zone B - Asymmetrical C - Footpath D - Cycle Path	H - Anthracite C - Custom RAL (Consult factory for "C")	M - Virtual Midnight Dimming device built into the fixture that reduces the light emitted in the hours around the middle of the night



Job Name/Date:

Fixture Type Designation:



## PHOTOMETRIC DATA

Note all Photometry is 3000K

### A - Pedestrian zone

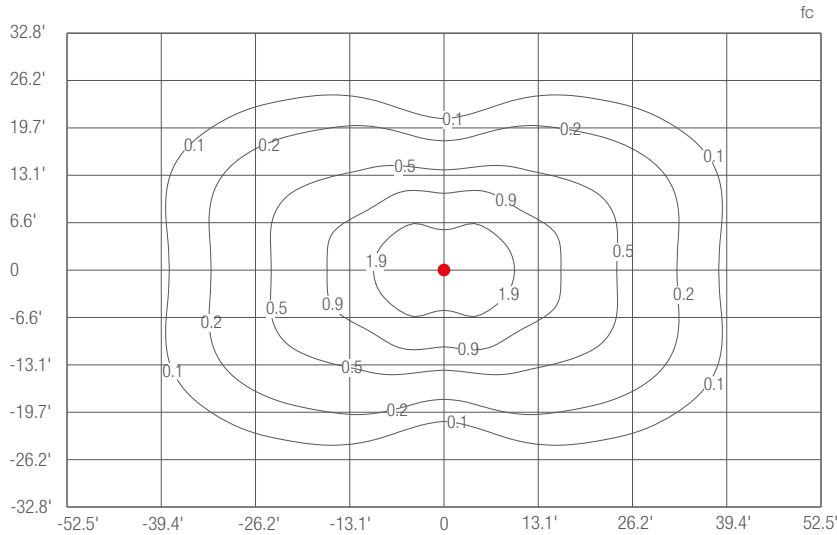

### B - Asymmetrical

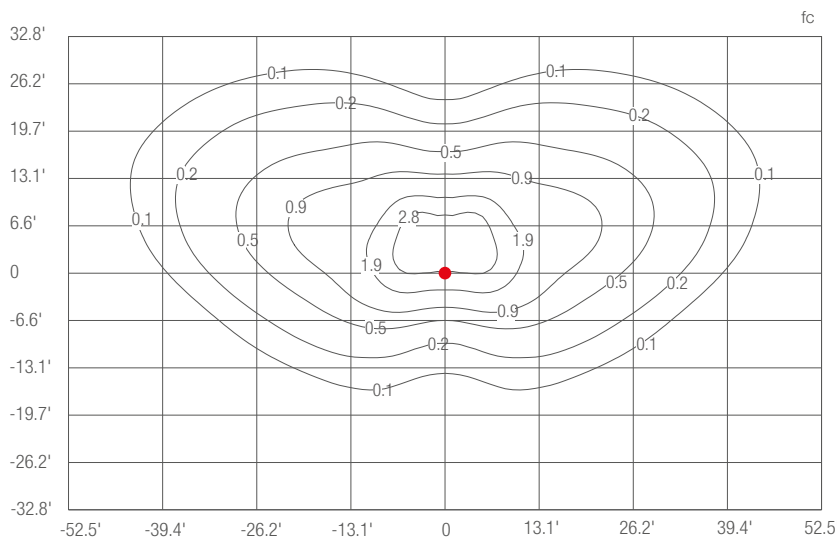



Job Name/Date:

Fixture Type Designation:



## PHOTOMETRIC DATA

Note all Photometry is 3000K

### C - Footpath

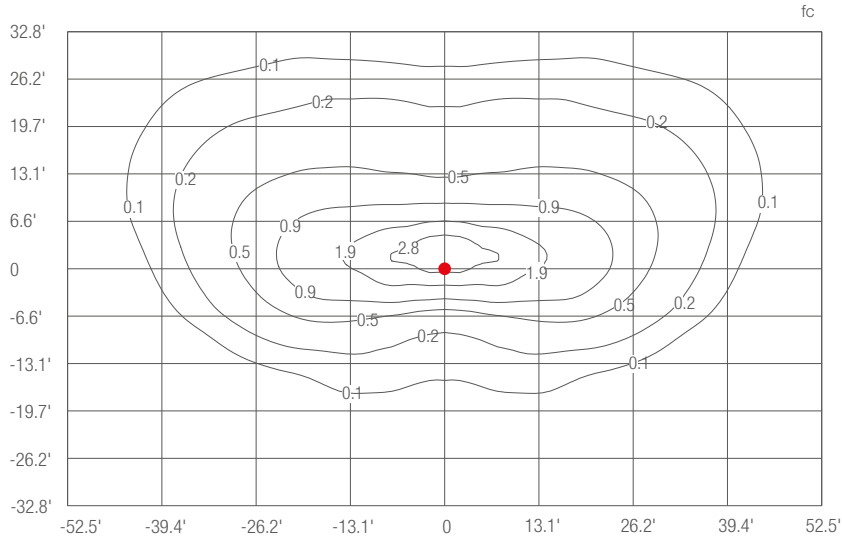

### D - Cycle path

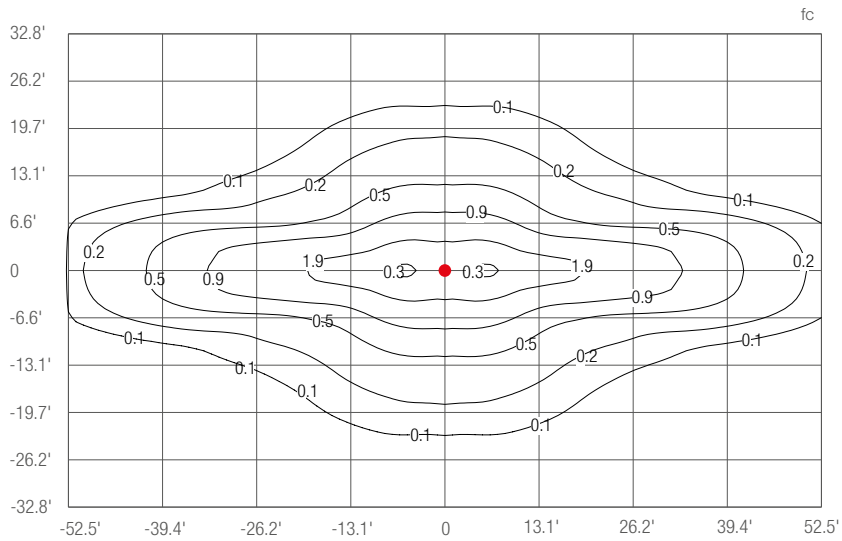

Job Name/Date:

Fixture Type Designation: