


Sky is a round adjustable surface mounted ceiling lamp made of AirCoral®. It is available in 3000K as standard with a 40° optic, adjustable +/- 30°.



## TECHNICAL DATA

|                           |                                   |
|---------------------------|-----------------------------------|
| <b>Wattage / Input</b>    | 9W (500mA)                        |
| <b>Power Supply</b>       | Remote, not included. See page 2. |
| <b>Construction</b>       | Body: AirCoral®                   |
| <b>CCT</b>                | 3000K (2700K, 4000K on request)   |
| <b>CRI</b>                | >90                               |
| <b>Delivered Lumens</b>   | 557 lm (3000K)                    |
| <b>Efficacy</b>           | 61.9 lm/W                         |
| <b>Optics</b>             | 40°                               |
| <b>Finishes</b>           | AirCoral®                         |
| <b>Fixture Dimensions</b> | Ø4.72" x 6.30" h                  |
| <b>Fixture Weight</b>     | -                                 |
| <b>IP Rating</b>          | IP20                              |

Fixture Dimensions

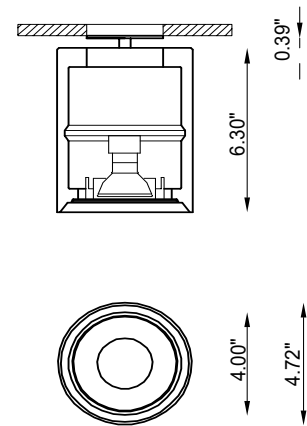

The body is made of AirCoral® a unique patented composite material that actually purifies the air. It can be calculated how many cubic feet each fixture will purify. See website for AirCoral® calculator.

Additionally, AirCoral® is:  
 Antibacterial.  
 Antifungal.  
 Scratch-resistant.  
 Dust-resistant.  
 Suitable for painting.  
 LEED recognized material.

## ORDERING INFORMATION

Example: BU3048.Z.AC.US. Power Supplies ordered separately.

|                  |                |    |
|------------------|----------------|----|
| BU3048.Z         | AC             | US |
| <b>Model No.</b> | <b>Finish</b>  |    |
| BU3048.Z         | AC - AirCoral® | US |

Job Name/Date:

Fixture Type Designation:

**SUGGESTED POWER SUPPLIES**

500mA


| Part Number                 | Description           | Input/Output                            | # of Fixtures |
|-----------------------------|-----------------------|---|---------------|
| <a href="#">PPLT00154</a>   | 0-10V Dimming to 10%  | 120-277VAC to 500mA, 12W, Class 2       | 1-1           |
| <a href="#">PPLT00469</a>   | Phase Dim (120V only) | 120VAC to 500mA, 14W, Class 2           | 1-1           |
| <a href="#">PPLT00467-P</a> | 0-10V Dimming to 1.0% | 120-277VAC to 500mA, 50W, Class 2, DAMP | 1-2           |
| <a href="#">PPLT00538-P</a> | 0-10V Dimming to 0.1% | 120-277VAC to 500mA, 100W, Class 2      | 1-8           |

For other power supply options consult factory.

**PHOTOMETRIC DATA**

Note all Photometry is 3000K

Maximum Candela = 685

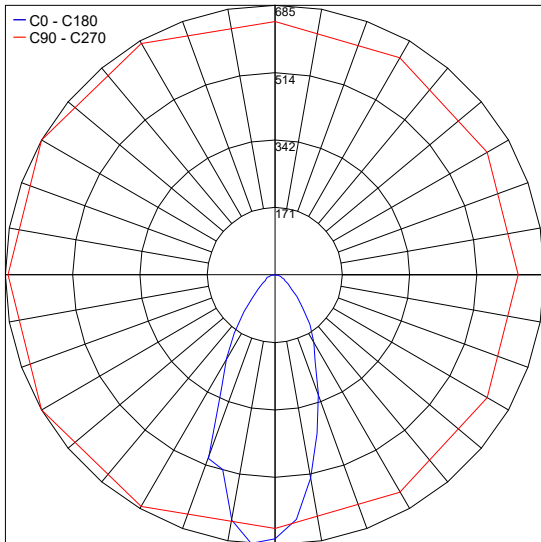

Job Name/Date:

Fixture Type Designation: