



Slice C is an indoor ceiling mounted luminaire with a minimal design made of a white painted aluminum body and AirCoral® front panel that maintains all the features of its totally disappearing recessed version, Slice. It is available in 3 color temperatures and diffused optics.

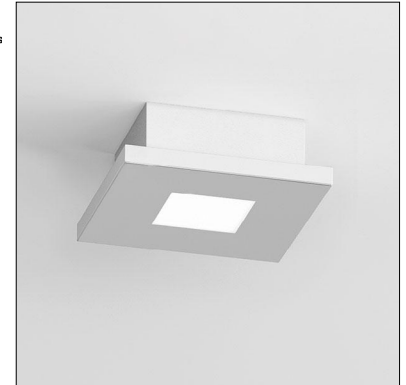

TECHNICAL DATA

Wattage / Input	8.5W (350mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: AirCoral®
CCT	3000K (2700K, 4000K on request)
CRI	>90
Delivered Lumens	612 lm (3000K)
Efficacy	72 lm/W
Optics	Diffuse
Finishes	AirCoral®
LED Source	COB professional LED
Fixture Dimensions	5.91" l x 5.91" w x 2.36" h
Aperature	2.36" x 2.36"
Fixture Weight	—
IP Rating	IP40

Fixture Dimensions

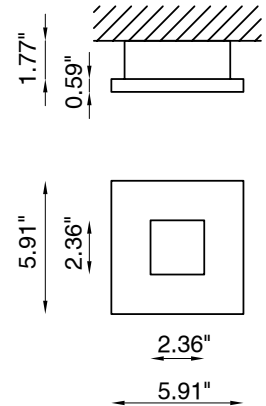

The body is made of Aircoral® a unique patented composite material that actually purifies the air. It can be calculated how many cubic feet each fixture will purify. See website for Aircoral® calculator.

- Additionally, Aircoral® is:
- Antibacterial.
 - Antifungal.
 - Scratch-resistant.
 - Dust-resistant.
 - Suitable for painting.
 - LEED recognized material.

ORDERING INFORMATION

Example: BU1922.AC4S00M30.ND.US.

BU1922.AC4S00M		ND.US
Model No.	CCT	
BU1922.AC4S00M	27 - 2700K 30 - 3000K 40 - 4000K	ND.US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 10W, Class 2	1-1
PPLT00496	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2	1-1
PPLT00308-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 30W, Class 2	1-2
PPLT00263	Leading / Trailing-Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	1-1
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2	1-2
PPLT00538-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-8

Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	1-1
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	2-2

For other power supply options consult factory.

PHOTOMETRIC DATA

All photometry is 3000K

Maximum Candela = 217.1

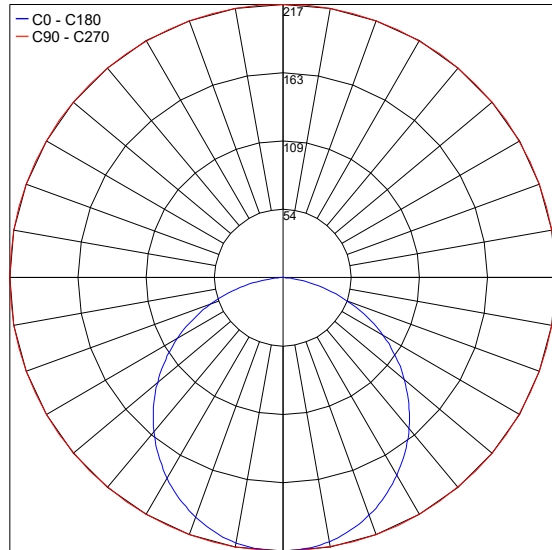

PHOTOMETRIC FILENAME : SLICE C - BU1922.AC.IES

Job Name/Date:

Fixture Type Designation: