

SLICE




800 lm IN 0.49 inch;
ZEROING OF REAR SPACE

SUPERFUTUREDESIGN*

TOTALLY CONCEALED
INSTALLATION IN JUST 0.49 inch

needs 0.2 inch for
installation, without
mounting **form work**


front inspection
for maintenance purposes

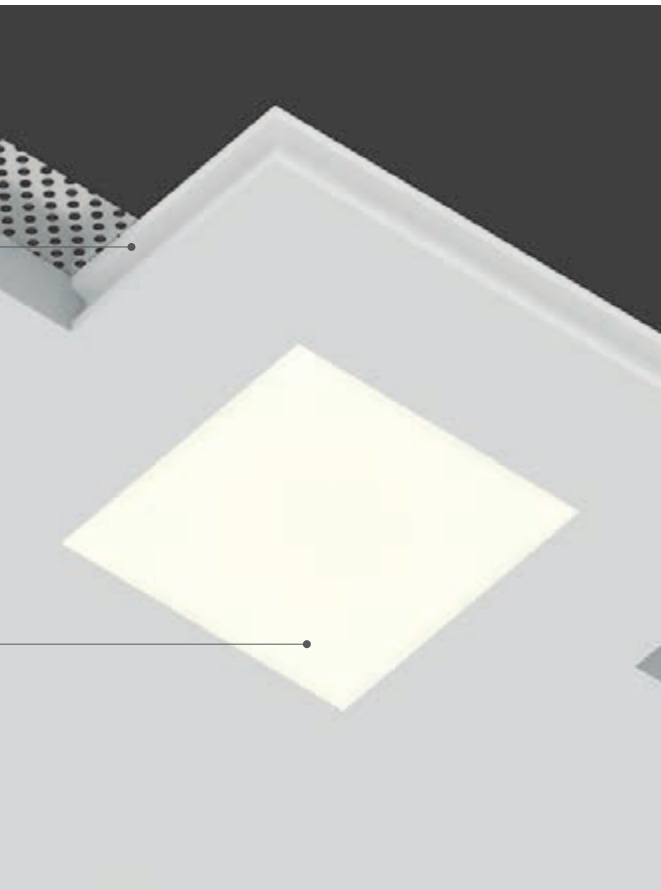


800 lm

high luminous output


MINIMUM REAR SIZE

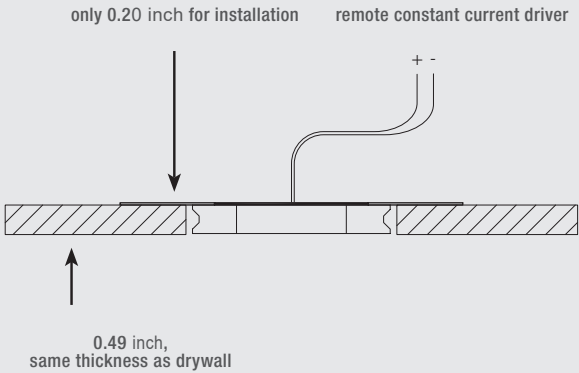


*Slice needs 0.20 inch for installation, does not need any **form work** and can be installed in drywall of just 0.49 inch thick. It can be inspected from the front, it does not need any inspection hatch.*

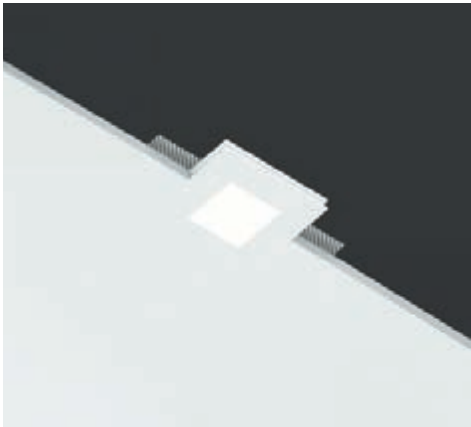

Slice Square

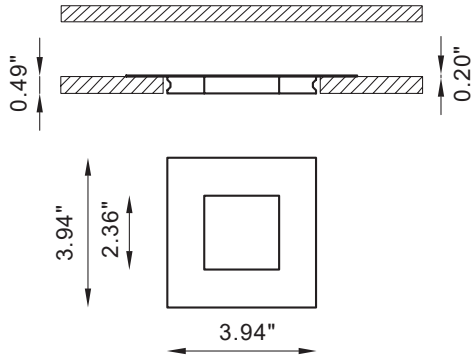

Slice Round

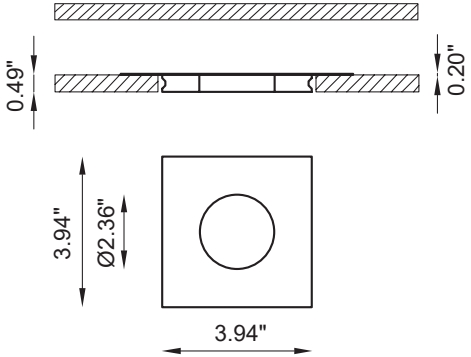

OTHER AVAILABLE CODES

BU1921.AC 4 R 00 M _ WD	<i>lens</i>	diffuse
	<i>light color</i>	
	27	2700K
	30	3000K
example of code composition	40	4000K (on request)
	BU1921.AC 4 R 00 M 30 WD	

TECHNICAL FEATURES

Code	BU1921.AC XX
Type	Downlight 90° 
Material	AC: AirCoral®
Absorption capacity*	12.92 ft² (1.20 m²)
Weight	0.18 lbs
Mounting	Wall and ceiling recessed
IP rating	IP40
Control gear	Remote constant current driver (not included)
Cut out for plasterboard	5.12 × 5.12 in
Lamp type	LED 300 mA  Vf: 23.5 VDC
Lamp wattage	1 × 7W
Luminous efficacy	1 × 800 lm
Light distribution	Diffuse
Fitting	-
Light color	White 3000K White 2700K I 4000K (on request)
Light hole	2.36 × 2.36 in
Voltage connection	By driver (optional)
CRI	90

OTHER AVAILABLE CODES

BU1923.AC 4 R 00 M _ WD	<i>lens</i>	diffuse
	<i>light color</i>	
	27	2700K
	30	3000K
example of code composition	40	4000K (on request)
	BU1923.AC 4 R 00 M 30 WD	

TECHNICAL FEATURES

Code	BU1923.AC XX
Type	Downlight 90° 
Material	AC: AirCoral®
Absorption capacity*	12.92 ft² (1.20 m²)
Weight	0.18 lbs
Mounting	Wall and ceiling recessed
IP rating	IP40
Control gear	Remote constant current driver (not included)
Cut out for plasterboard	5.12 × 5.12 in
Lamp type	LED 300 mA  Vf: 23.5 VDC
Lamp wattage	1 × 7W
Luminous efficacy	1 × 800 lm
Light distribution	Diffuse
Fitting	-
Light color	White 3000K White 2700K I 4000K (on request)
Light hole	Ø 2.36 in
Voltage connection	By driver (optional)
CRI	90



SLICE C



79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

* The absorption capacity per ft² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft²