



At 0.49" thick and high lumen output, Slice is a revolutionary indoor recessed luminaire made of AirCoral® characterized by its slim design. With no need for a mounting box, Slice can be both ceiling and wall mounted, fitted into the thickness of the drywall panel or plaster. It is available in a square or round version with 3000K standard color temperature and diffuse optics.

TECHNICAL DATA

Wattage / Input	7W (300mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: AirCoral®
CCT	3000K (standard) 2700K, 4000K (on request)
CRI	>90
Delivered Lumens	612 lm (3000K)
Efficacy	72 lm/W (3000K)
Optics	Diffuse
Finishes	AirCoral° - Unfinished
Fixture Dimensions	3.94" l x 3.94" w x 0.49" h
Cut-Out Dimensions	5.12" x 5.12"
Aperture	2.36" x 2.36"
Fixture Weight	0.18 lbs
LED Source	1 COB Professional LED
IP Rating	IP40

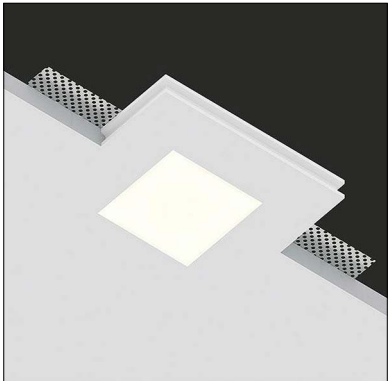

Fixture Dimensions:

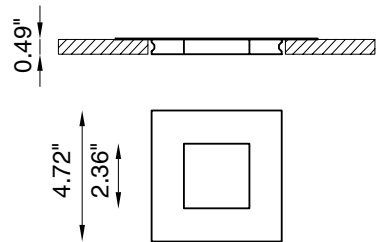

ORDERING INFORMATION

Example: BU1921.AC4R00M30WD.US Power Supplies ordered separately.

BU1921.AC4R00M		WD.US
Model No.	CCT	
BU1921.AC4R00M	30 - 3000K (standard) 27 - 2700K (on request) 40 - 4000K (on request)	WD.US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES


300mA

Part Number	Description	Input/Output	Fixtures
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 300mA, 10W, Class 2, DAMP	1-1
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 300mA, 50W, Class 2, DAMP	1-2
PPLT00558-P	0-10V Dimming to 0.1%	120-277VAC to 300mA, 75W, Class 2	1-2

For other power supply options consult factory.

PHOTOMETRIC DATA

Maximum Candela = 217

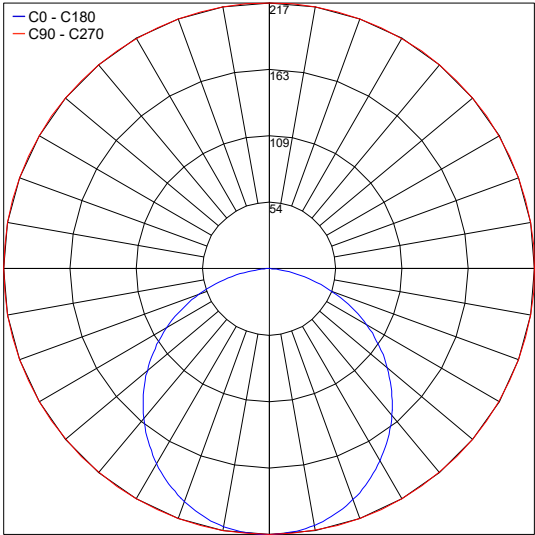

PHOTOMETRIC FILENAME : SLICE BU1921.AC 3000K.IES

Job Name/Date:

Fixture Type Designation: