


Slim is an indoor recessed wall light that is a longer, slimmer variant of the original Normall. The Slim combines timeless design that can be integrated into any interior with state of the art, energy efficient "Rebel" LED units.



## TECHNICAL DATA

<b>Wattage / Input</b>	6W (WarmDim - 350mA), 9.1W (350mA), 6.4W (250mA)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: CALCYT® Plaster Lens: Tempered Glass
<b>CCT</b>	2200K, 2700K, 3000K, 4000K, WarmDim
<b>CRI</b>	>90 and >80
<b>Delivered Lumens</b>	401 lm (6.4W, 3000K)
<b>Efficacy</b>	62 lm/W
<b>Optics</b>	Fixed
<b>Finishes</b>	CALCYT® Plaster - fully paintable
<b>Fixture Dimensions</b>	3.54" w x 21.46" h x 3.54" l
<b>Cut-out Dimension</b>	3.74" l x 21.65" h
<b>Aperature</b>	2.20" x 15.67"
<b>Color Consistency</b>	2-Step MacAdam, 4-Step MacAdam (WarmDim)
<b>IP Rating</b>	IP20

Wall Cut-Out: 3.74" l x 21.65" h  
Fixture Dimensions

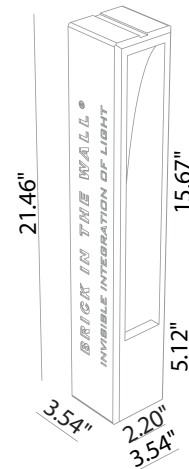

## ORDERING INFORMATION

*Example: 107 29 500. Accessories / Power Supplies ordered separately.*

--

Model No.	Description
107 29 500 - 2200K	6.4W, 600 lm, CRI 90 - 250mA Remote Driver (see p. 2)
107 29 000 - 2700K	6.4W, 600 lm, CRI 90 - 250mA Remote Driver (see p. 2)
107 29 100 - 3000K	6.4W, 600 lm, CRI 90 - 250mA Remote Driver (see p. 2)
107 27 000 - 2700K	9.1W, 1000 lm, CRI 90 - 350mA Remote Driver (see p. 2)
107 27 100 - 3000K	9.1W, 1000 lm, CRI 90 - 350mA Remote Driver (see p. 2)
107 27 200 - 4000K	9.1W, 1000 lm, CRI 90 - 350mA Remote Driver (see p. 2)
107 29 600 - WarmDim	6W, 500 lm, CRI 80 - 350mA Remote Driver (see p. 2)

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

350mA - 9.1W version (1000 lm), 6W version (500 lm)

Part Number	Description	Input/Output	# of Fixtures	
			6W	9.1W
<a href="#">PPLT00468</a>	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	1-1	1-1
<a href="#">PPLT00465-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 20W, Class 2	1-2	1-2
<a href="#">PPLT00263</a>	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	2-2	1-1
<a href="#">PPLT00309-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 50W, Class 2	1-2	1-2
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-8	1-8

Suggested Lutron Compatible - 9.1W version (1000 lm)

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00516</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	1-1
<a href="#">PPLT00179</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	2-2

250mA - 6.4W version (600 lm)


Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00466-P</a>	0-10V Dimming to 1.0%	120-277VAC to 250mA, 10W, Class 2	1-1
<a href="#">PPLT00290</a>	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 250mA, 16W, Class 2	1-1
<a href="#">PPLT00465-P</a>	0-10V Dimming to 1.0%	120-277VAC to 250mA, 20W, Class 2	1-2
<a href="#">PPLT00308-P</a>	0-10V Dimming to 0.1%	120-277VAC to 250mA, 30W, Class 2	1-2
<a href="#">PPLT00309-P</a>	0-10V Dimming to 0.1%	120-277VAC to 250mA, 50W, Class 2	1-2
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1%	120-277VAC to 250mA, 100W, Class 2	1-8

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

## REQUIRED ACCESSORIES - Installation

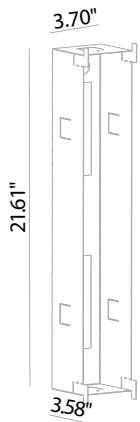


**707 01 000**  
 Outer Casing  
 Housing - perforated aluminum

## PHOTOMETRIC DATA


Note all Photometry is 3000K

Maximum Candela = 262.1

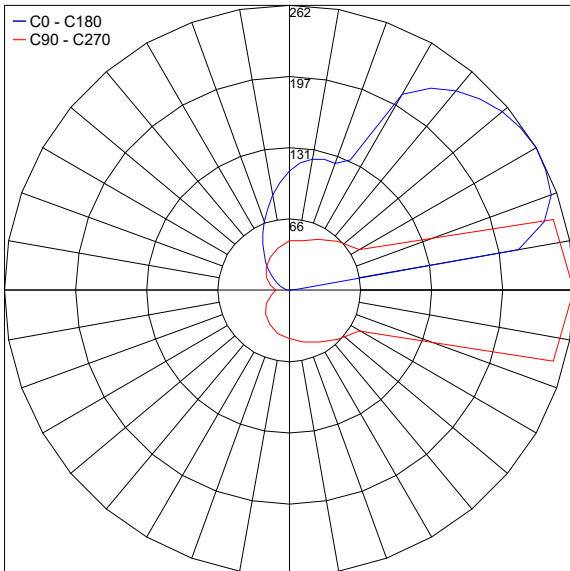

Warm to Dim

Maximum Candela = 201.7

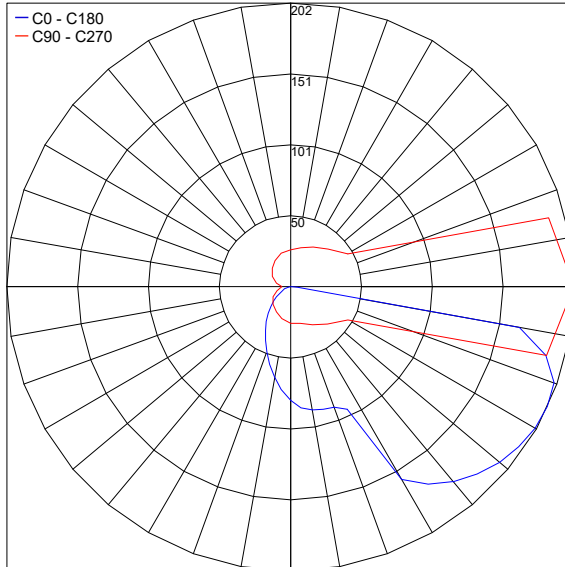

Job Name/Date:

Fixture Type Designation: