


Slim is an indoor recessed wall light that is a longer, slimmer variant of the original Normall. The Slim combines timeless design that can be integrated into any interior with state of the art, energy efficient "Rebel" LED units.



Wall Cut-Out: 3.74" l x 21.65" h
Fixture Dimensions

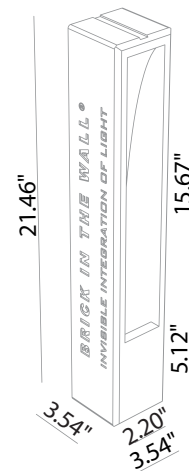

TECHNICAL DATA

Wattage / Input	6W (WarmDim - 350mA), 9.1W (350mA), 6.4W (250mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: CALCYT® Plaster Lens: Tempered Glass
CCT	2200K, 2700K, 3000K, 4000K, WarmDim
CRI	>90 and >80
Delivered Lumens	401 lm (6.4W, 3000K)
Efficacy	62 lm/W
Optics	Fixed
Finishes	CALCYT® Plaster - fully paintable
Fixture Dimensions	3.54" w x 21.46" h x 3.54" l
Cut-out Dimension	3.74" l x 21.65" h
Aperature	2.20" x 15.67"
Color Consistency	2-Step MacAdam, 4-Step MacAdam (WarmDim)
IP Rating	IP20

ORDERING INFORMATION

Example: 107 29 500. Accessories / Power Supplies ordered separately.

Model No.	Description
107 29 500 - 2200K	6.4W, 600 lm, CRI 90 - 250mA Remote Driver (see p. 2)
107 29 000 - 2700K	6.4W, 600 lm, CRI 90 - 250mA Remote Driver (see p. 2)
107 29 100 - 3000K	6.4W, 600 lm, CRI 90 - 250mA Remote Driver (see p. 2)
107 27 000 - 2700K	9.1W, 1000 lm, CRI 90 - 350mA Remote Driver (see p. 2)
107 27 100 - 3000K	9.1W, 1000 lm, CRI 90 - 350mA Remote Driver (see p. 2)
107 27 200 - 4000K	9.1W, 1000 lm, CRI 90 - 350mA Remote Driver (see p. 2)
107 29 600 - WarmDim	6W, 500 lm, CRI 80 - 350mA Remote Driver (see p. 2)

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA - 9.1W version (1000 lm), 6W version (500 lm)

Part Number	Description	Input/Output	# of Fixtures	
			6W	9.1W
PPLT00468	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	1-1	1-1
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 20W, Class 2	1-2	1-2
PPLT00263	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	2-2	1-1
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 50W, Class 2	1-2	1-2
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-2	1-2

Suggested Lutron Compatible - 9.1W version (1000 lm)


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	1-1
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	2-2

250mA - 6.4W version (600 lm)

Part Number	Description	Input/Output	# of Fixtures
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 250mA, 10W, Class 2	1-1
PPLT00290	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 250mA, 16W, Class 2	1-1
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 250mA, 20W, Class 2	1-2
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 250mA, 50W, Class 2	1-2
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 250mA, 100W, Class 2	1-2

*For other power supply options consult factory.**Job Name/Date:**Fixture Type Designation:*

REQUIRED ACCESSORIES - Installation

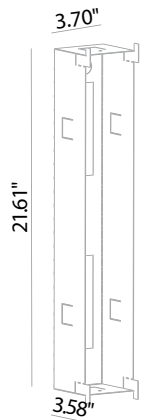


707 01 000
Outer Casing
Housing - perforated aluminum

PHOTOMETRIC DATA


Note all Photometry is 3000K

Maximum Candela = 262.1

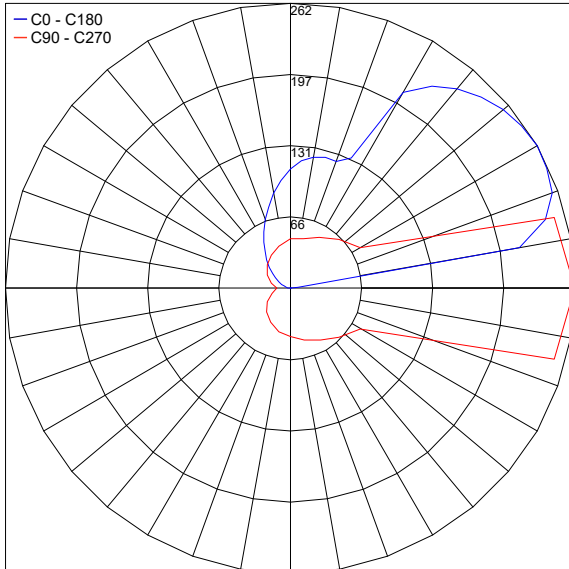

Warm to Dim

Maximum Candela = 201.7

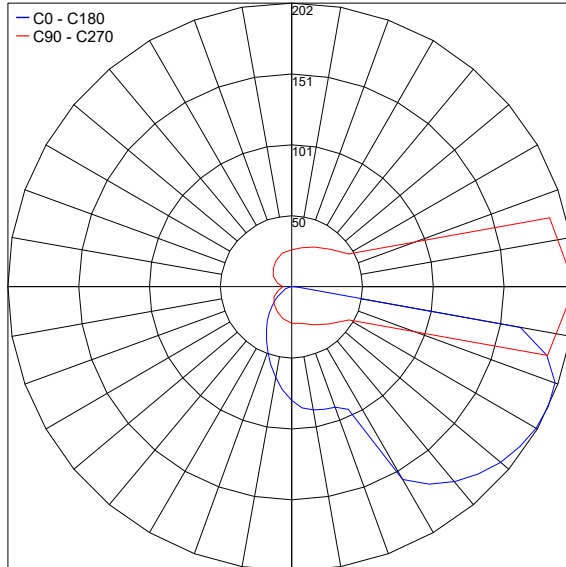

Job Name/Date:

Fixture Type Designation: