


Slim is an indoor recessed wall light that is a longer, slimmer variant of the original Normal. The Slim combines timeless design that can be integrated into any interior with state of the art, energy efficient "Rebel" LED units.



TECHNICAL DATA

Wattage / Input	6W (WarmDim - 350mA), 9.1W (350mA), 6.4W (250mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: CALCYT® Plaster Lens: Tempered Glass
CCT	2200K, 2700K, 3000K, 4000K, WarmDim
CRI	>90 and >80
Delivered Lumens	401 lm (6.4W, 3000K)
Efficacy	62 lm/W
Optics	Fixed
Finishes	CALCYT® Plaster - fully paintable
Fixture Dimensions	3.54" w x 21.46" h x 3.54" l
Cut-out Dimension	3.74" l x 21.65" h
Aperature	2.20" x 15.67"
Color Consistency	2-Step MacAdam, 4-Step MacAdam (WarmDim)
IP Rating	IP20

Wall Cut-Out: 3.74" l x 21.65" h
Fixture Dimensions

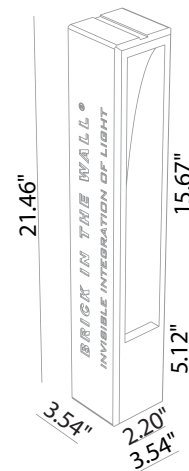

ORDERING INFORMATION

Example: 107 29 500. Accessories / Power Supplies ordered separately.

--

Model No.	Description
107 29 500 - 2200K	6.4W, 600 lm, CRI 90 - 250mA Remote Driver (see p. 2)
107 29 000 - 2700K	6.4W, 600 lm, CRI 90 - 250mA Remote Driver (see p. 2)
107 29 100 - 3000K	6.4W, 600 lm, CRI 90 - 250mA Remote Driver (see p. 2)
107 27 000 - 2700K	9.1W, 1000 lm, CRI 90 - 350mA Remote Driver (see p. 2)
107 27 100 - 3000K	9.1W, 1000 lm, CRI 90 - 350mA Remote Driver (see p. 2)
107 27 200 - 4000K	9.1W, 1000 lm, CRI 90 - 350mA Remote Driver (see p. 2)
107 29 600 - WarmDim	6W, 500 lm, CRI 80 - 350mA Remote Driver (see p. 2)

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA - 9.1W version (1000 lm), 6W version (500 lm)

Part Number	Description	Input/Output	# of Fixtures	
			6W	9.1W
PPLT00468	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	1-1	1-1
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 20W, Class 2	1-2	1-2
PPLT00263	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 350mA, 32W, Class 2	2-2	1-1
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 50W, Class 2	1-2	1-2
PPLT00538-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-8	1-8

Suggested Lutron Compatible - 9.1W version (1000 lm)

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00271	LTEA2W	LTEA	100%-1%	Hi-Lume™ 1% 2-Wire LED Driver (120V forward phase only)	120VAC to 350mA, 13W, Class 2	1-1
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 13W, Class 2	1-1
PPLT00179	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 350mA, 19W, Class 2	2-2
PPLT00220	LTEA2W	LTEA	100%-1%	Hi-Lume™ 1% 2-Wire LED Driver (120V forward phase only)	120VAC to 350mA, 19W, Class 2	2-2

250mA - 6.4W version (600 lm)


Part Number	Description	Input/Output	# of Fixtures
PPLT00466-P	0-10V Dimming to 1.0%	120-277VAC to 250mA, 10W, Class 2	1-1
PPLT00290	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 250mA, 16W, Class 2	1-1
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 250mA, 20W, Class 2	1-2
PPLT00308-P	0-10V Dimming to 0.1%	120-277VAC to 250mA, 30W, Class 2	1-2
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 250mA, 50W, Class 2	1-2
PPLT00538-P	0-10V Dimming to 0.1%	120-277VAC to 250mA, 100W, Class 2	1-8

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

ACCESSORIES - Installation

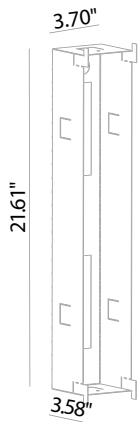


707 01 000
 Outer Casing
 Housing - perforated aluminum

PHOTOMETRIC DATA


Note all Photometry is 3000K

Maximum Candela = 262.1

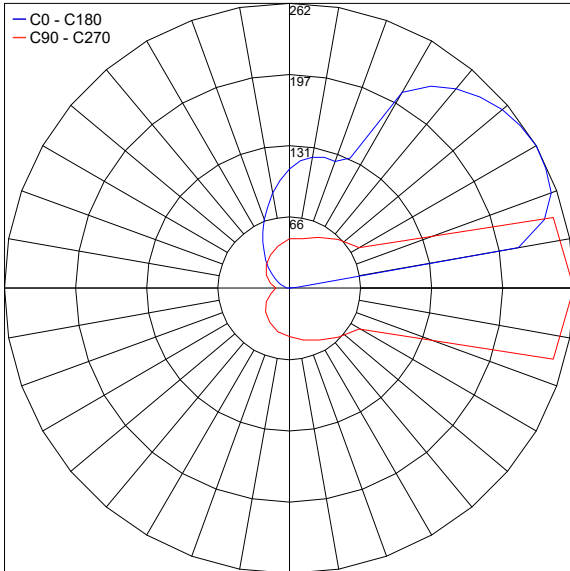

Warm to Dim

Maximum Candela = 201.7

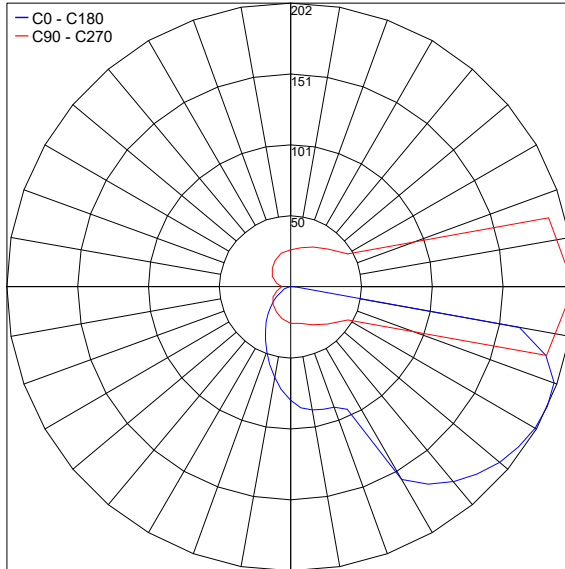

Job Name/Date:

Fixture Type Designation: