

# SMALL IP54

## OUTDOOR


Small IP54 is a recessed wall mounted fixture made of CALCYT® plaster and the little brother of the original Normall for use in outdoor environments. It can be used as an uplight or downlight with a curved back to create a great indirect lighting experience.



### TECHNICAL DATA

|                           |                                                          |
|---------------------------|----------------------------------------------------------|
| <b>Wattage / Input</b>    | 6.5W (350mA)                                             |
| <b>Power Supply</b>       | Remote, not included. See page 2.                        |
| <b>Construction</b>       | Body: Waterproof CALCYT® Plaster<br>Lens: Tempered Glass |
| <b>CCT</b>                | 2200K, 2700K, 3000K                                      |
| <b>CRI</b>                | >90                                                      |
| <b>Delivered Lumens</b>   | 331 lm (3000K)                                           |
| <b>Efficacy</b>           | 51 lm/W                                                  |
| <b>Optics</b>             | Fixed                                                    |
| <b>Finishes</b>           | CALCYT® Plaster - fully paintable                        |
| <b>Fixture Dimensions</b> | 4.72" w x 14.17" h x 3.54" l                             |
| <b>Cut-out Dimension</b>  | 4.88" l x 14.37" h                                       |
| <b>Aperature</b>          | 3.39" w x 9.17" h                                        |
| <b>Color Consistency</b>  | 2-Step MacAdam                                           |
| <b>IP Rating</b>          | IP54                                                     |

Ceiling Cut-Out: 4.88" l x 14.37" h  
Fixture Dimensions

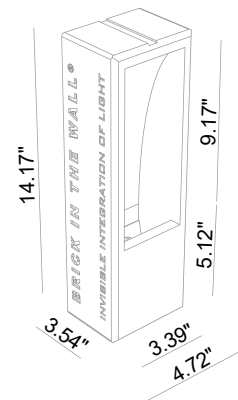

### ORDERING INFORMATION

*Example: 106 29 505. Accessories / Power Supplies ordered separately.*

| Model No.          | Description                               |
|--------------------|-------------------------------------------|
| 106 29 505 - 2200K | 6.5W, 600 lm, IP54 Outdoor, Remote Driver |
| 106 29 005 - 2700K | 6.5W, 600 lm, IP54 Outdoor, Remote Driver |
| 106 29 105 - 3000K | 6.5W, 600 lm, IP54 Outdoor, Remote Driver |

Job Name/Date:

Fixture Type Designation:

# SMALL IP54 OUTDOOR

## SUGGESTED POWER SUPPLIES

350mA

| Part Number                 | Description                                        | Input/Output                       | # of Fixtures |
|-----------------------------|----------------------------------------------------|------------------------------------|---------------|
| <a href="#">PPLT00468</a>   | Phase Dim (120V only)                              | 120VAC to 350mA, 14W, Class 2      | 1-1           |
| <a href="#">PPLT00465-P</a> | 0-10V Dimming to 1.0%                              | 120-277VAC to 350mA, 20W, Class 2  | 1-2           |
| <a href="#">PPLT00263</a>   | Leading / Trailing Edge Dimming to 10% (120V only) | 120-277VAC to 350mA, 32W, Class 2  | 1-1           |
| <a href="#">PPLT00309-P</a> | 0-10V Dimming to 0.1%                              | 120-277VAC to 350mA, 50W, Class 2  | 1-2           |
| <a href="#">PPLT00561-P</a> | 0-10V Dimming to 0.1%                              | 120-277VAC to 350mA, 100W, Class 2 | 1-2           |


## Suggested Lutron Compatible

| Part Number               | Option         | Lutron SKU | Dim Range | Description                                    | Input/Output                      | # of Fixtures |
|---------------------------|----------------|------------|-----------|------------------------------------------------|-----------------------------------|---------------|
| <a href="#">PPLT00516</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 350mA, 13W, Class 2 | 1-1           |
| <a href="#">PPLT00179</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 350mA, 19W, Class 2 | 2-2           |

For other power supply options consult factory.

## REQUIRED ACCESSORIES

### Installation

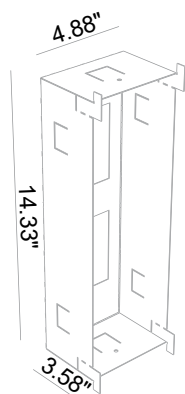


**706 01 000**  
Outer Casing  
Housing: perforated aluminum

## PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 255.7

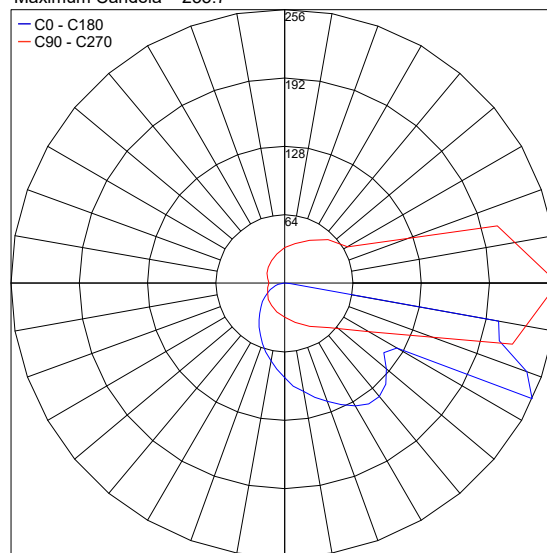

Job Name/Date:

Fixture Type Designation: