



diomede

## SOFIA

h 6.3" - 19.7" - 31.5"

360°



white



sand



graphite



aluminum

Bollard for solid surface installation. Head section made of EN47100 die-cast aluminum, machining aluminum base and three sizes pole of extruded aluminum H.6.3", H.19.7", H.31.5".

Powder polyester coated on treated layer to prevent corrosion, available in four standard colors.

Tempered transparent glass fixed with silicon glue.

Remote Power Supply  
500mA

Light source MID Power LED,  
CRI ≥80, 3000K/4000K

Power (10W total)

360° diffused downward  
emission

IP connector kit included

IP65

emission180° shield (D9045)  
and mounting plate  
(AM-00009) to be separately  
ordered.






h 6.3" 

3000K	h 6.30"	10W	689 lm	500mA
D901217092.US	D901217093.US	D901217094.US	D901217095.US	



D901227092.US	D901227093.US	D901227094.US	D901227095.US	
4000K	h 6.30"	10W	723 lm	500mA




h 19.7" 

3000K	h 19.7"	10W	689 lm	500mA
D901217102.US	D901217103.US	D901217104.US	D901217105.US	



D901227102.US	D901227103.US	D901227104.US	D901227105.US	
4000K	h 19.7"	10W	723 lm	500mA






h 31.5" 

3000K	h 31.5"	10W	689 lm	500mA
D901217112.US	D901217113.US	D901217114.US	D901217115.US	



D901227112.US	D901227113.US	D901227114.US	D901227115.US	
4000K	h 31.5"	10W	723 lm	500mA

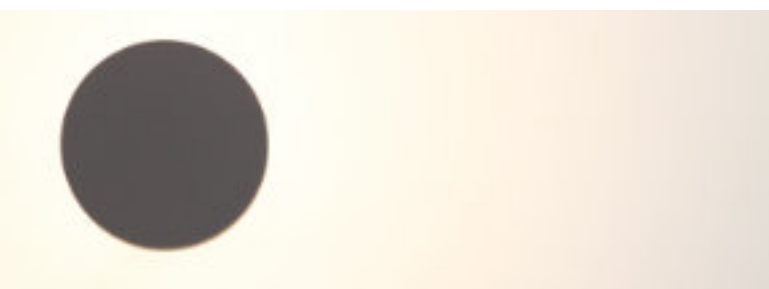



## SOFIA spike

h 6.3" - 19.7" - 31.5"

360°



white



sand



graphite



aluminum

Bollard for ground installation.  
Head section made of EN47100  
die-cast aluminum, fiberglass  
reinforced plastic spike and  
three sizes pole of extruded  
aluminum H.6.3", H.19.7",  
H.31.5".

Powder polyester coated on  
treated layer to prevent  
corrosion, available in four  
standard colors.

Tempered transparent glass  
fixed with silicon glue.

Remote Power Supply  
500mA

Light source MID Power LED,  
CRI ≥80, 3000K/4000K

power(10W total)

360° downward emission

IP connector kit included

IP65

Emission 180° shield (D9045)  
to be separately ordered.



h 6.30"



3000K	h 6.3"	10W	689 lm	500mA
D901217152.US	D901217153.US	D901217154.US	D901217155.US	



4000K	h 6.3"	10W	723 lm	500mA
D901227152.US	D901227153.US	D901227154.US	D901227155.US	



h 19.7"



3000K	h 19.7"	10W	689 lm	500mA
D901217162.US	D901217163.US	D901217164.US	D901217165.US	



4000K	h 19.7"	10W	723 lm	500mA
D901227162.US	D901227163.US	D901227164.US	D901227165.US	





h 31.50"



3000K	h 31.5"	10W	689 lm	500mA
D901217172.US	D901217173.US	D901217174.US	D901217175.US	



4000K	h 31.5"	10W	723 lm	500mA
D901227172.US	D901227173.US	D901227174.US	D901227175.US	





## ACCESSORIES

### 180° SHIELD

---

D9044



### MOUNTING PLATE (for non spike version)

---

AM-00009

