


Sofia is an IP65-rated outdoor bollard with a round head and a pole available in 3 different heights for solid surface installation. It is available in 3 color temperatures and 5 standard finishes with 360° downward light emission (180° shield available). Dark Sky compliant for output below 80°.



## TECHNICAL DATA

<b>Wattage / Input</b>	10W (500mA)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Head/Base: Die-Cast/Machined Aluminum Pole: Extruded Aluminum Lens: Tempered, Transparent Glass
<b>CCT</b>	2700K, 3000K, 4000K
<b>BUG Rating</b>	B0-U1-G0 (3000K) B1-U1-G0 (4000K)
<b>CRI</b>	>80
<b>Delivered Lumens</b>	689 lm (3000K) Dark Sky compliant, output below 80°
<b>Efficacy</b>	68.9 lm/W (3000K)
<b>Optics</b>	360°
<b>Finishes</b>	5 Standard, See Below
<b>Fixture Dimensions</b>	Ø4.72" x 6.3", 19.7", 31.5" h
<b>IP Rating</b>	IP65


Fixture Dimensions



## ORDERING INFORMATION

Example: D901217104.US Accessories / Power Supplies ordered separately.

D9012				US
Model No.	CCT	Height	Finish	
D9012	37 - 2700K	09 - 6.3" h	2 - White	US
	17 - 3000K	10 - 19.7" h	3 - Sand	
	27 - 4000K	11 - 31.5" h	4 - Graphite	
			5 - Aluminum	
			8 - Cor-ten	

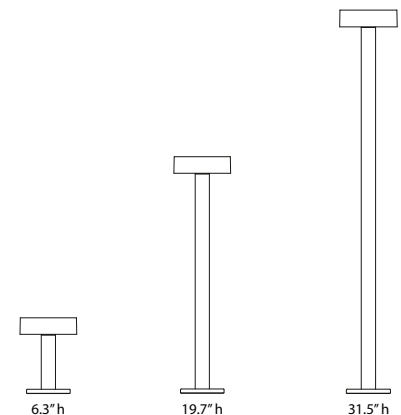

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

500mA

Part Number	Description	Input/Output	Fixtures
<a href="#">PPLT00469</a>	Phase Dim (120V Only)	120VAC to 500mA, 14W, Class 2	1-1
<a href="#">PPLT00465-P</a>	0-10V Dimming to 1.0%	120-277VAC to 500mA, 20W, Class 2, DAMP	1-2
<a href="#">PPLT00308-P</a>	0-10V Dimming to 0.1%	120-277VAC to 500mA, 30W, Class 2, DAMP	1-2
<a href="#">PPLT00168-P</a>	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2	1-4
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1%	120-277VAC to 500mA, 100W, Class 2	1-8

## Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00195</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 19W, Class 2	1-1
<a href="#">PPLT00180</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 27W, Class 2	2-2

For other power supply options consult factory.

## ACCESSORIES




**D9044**  
180° Shield



**AM-00009**  
Mounting Plate Assembly

## PHOTOMETRIC DATA - 3000K

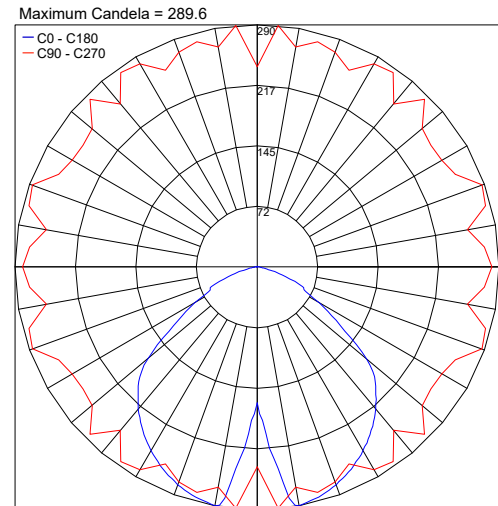

PHOTOMETRIC FILENAME : SOFIA 360\_3000K.IES

## FINISHES



white



sand



graphite



aluminum



corten

Job Name/Date:

Fixture Type Designation: