


Spike Mega is an IP66-rated luminaire suitable for installation as a bollard, that comes with 180° or 360° diffused light emission and has a higher wattage than its counterpart, Spike. It is available in 2 color temperatures and diffused optics.



## TECHNICAL DATA

<b>Wattage / Input</b>	13.2W - 180° Emission 26.4W - 360° Emission
<b>Power Supply</b>	Remote, not included. Consult Factory.
<b>Construction</b>	Head: Aluminum (Anodized to 18 microns) Pole: Stainless Steel Lens: Satin PMMA Cable Length: 3.28'
<b>CCT</b>	3000K, 4000K
<b>BUG Rating</b>	B0-U3-G1 (180°) B1-U3-G2 (360°)
<b>Delivered Lumens</b>	1701 lm (180° - 3000K) 3402 lm (360° - 3000K)
<b>Efficacy</b>	128.8 lm/W (3000K)
<b>Optics</b>	Diffused 180° or 360°
<b>Finishes</b>	5 Standard, See Below
<b>Fixture Dimensions</b>	Head: Ø7.87" x 0.79" h Pole Height: 118.11" h
<b>Color Consistency</b>	<3-Step MacAdam
<b>IP Rating</b>	IP66
<b>Impact Resistance</b>	IK08

Fixture Dimensions

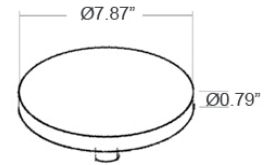

See Page 2 for Pole Accessories

## ORDERING INFORMATION

Example: LM05.104365.US.03.DI.BP.00. Accessories / Power Supplies ordered separately.

		DI		00
Model No.	Finish	Optics	CCT	Driver
LM05.104365.US - 180°	01 - White	DI - Diffused	BP - 3000K	00 - Remote
LM05.104366.US - 360°	02 - Black		BF - 4000K	(see page 2)
	03 - Aluminum			
	04 - Cor-ten			
	11 - Anthracite			


Job Name/Date:

Fixture Type Designation:


## SUGGESTED POWER SUPPLIES

Consult Factory

## ACCESSORIES - Installation

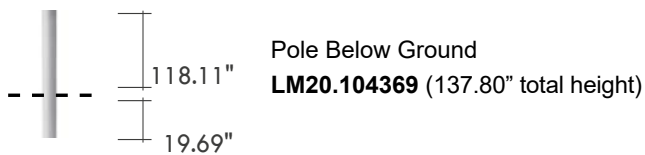


Anchor Plate  
**LM20.101235** (Ø7.87" x 11.81" h)

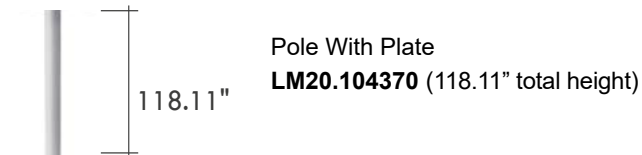


## PHOTOMETRIC DATA

Note: All photometric data is 3000K

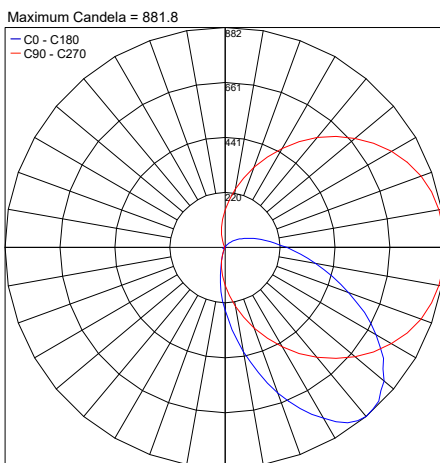

PHOTOMETRIC FILENAME : SPIKE MEGA 180° 30K LM05.104365.XX.XXX.DI.XX.IES

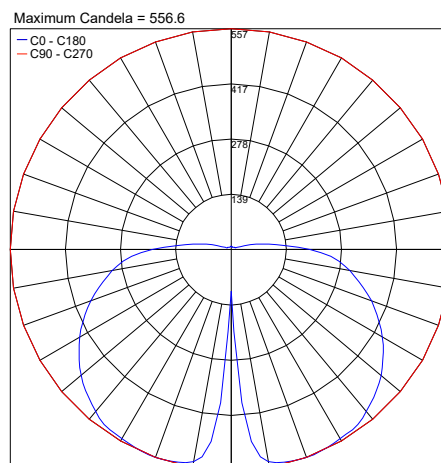

PHOTOMETRIC FILENAME : SPIKE MEGA 360° 30K LM05.104366.XX.XXX.DI.XX.LDT

Job Name/Date:

Fixture Type Designation: