

SPOT 1.6 316L


The Spot 1 316L Series are compact spotlights suitable for outdoor, fountain and underwater use. Available in white or blue light with 3 optic options.

TECHNICAL DATA

Wattage / Input	2W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: AISI 316L Stainless Steel Trim: AISI 316L Stainless Steel Lens: Transparent tempered glass Cable Length: 16.4' standard
CCT	2700K, 3000K, 4000K, 5000K, Blue
CRI	CRI >80
BUG Rating	B0-U0-G0 (3000K, 10°, 40°) B0-U1-G0 (3000K, 20°)
Delivered Lumens	88 lm (3000K)
Efficacy	44 lm/W (3000K)
Optics	10°, 20°, 40°
Finishes	Stainless Steel
Fixture Dimensions	Ø1.2" x 2.2" I
Fixture Weight	1.1 lbs
LED Source	1 Power LED
Lumen Maintenance	L90, B10>50,000hrs (Ta 25°C)
Color Consistency	1/4 ANSI BIN
Operating Temp.	-4°F to +113°F
IP Rating	IP68
IK Rating	IK10



Fixture Dimensions



ORDERING INFORMATION

Example: PW16009MI or PW16009MI-2. Accessories / Power Supplies ordered separately

PW1600			I	
Model No.	CCT	Optics	Trim	Cable Length
PW1600	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - Blue	S - 10° M - 20° L - 40°	I - Stainless Steel	16.4' standard 2 - 32.81' 3 - 49.21' 4 - 65.62'

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES


24VDC - FOR USE WITH FOUNTAIN / WATER FEATURES

Part Number	Description	Input/Output	# of Fixtures
FPV-100000024	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, IP66, NEMA 4X	1-40
FPV-100100024	0-10V Dimming to 1.0%	120-277VAC to 24VDC, 100W, Class 2, IP66, NEMA 4X	1-40
FPV-100EL0024	DMX / RDM (Field Addressable) / DALI	120-277VAC to 24VDC, 100W, Class 2, IP66, NEMA 4X	1-40

For other power supply options consult factory.

ACCESSORIES


Installation

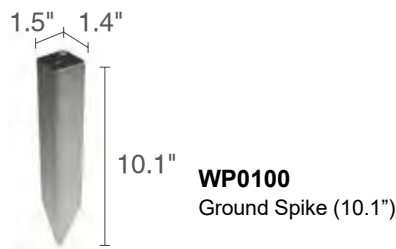


PHOTOMETRIC DATA

Note all photometry in 3000K, CRI 80


S - 10°

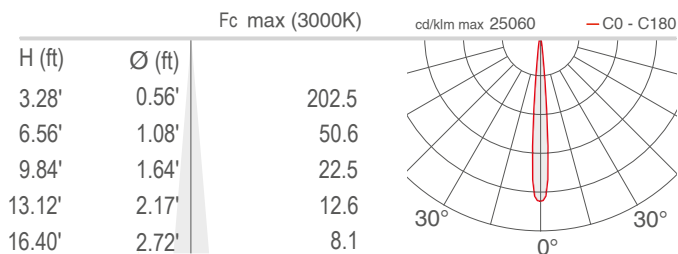

M - 20°

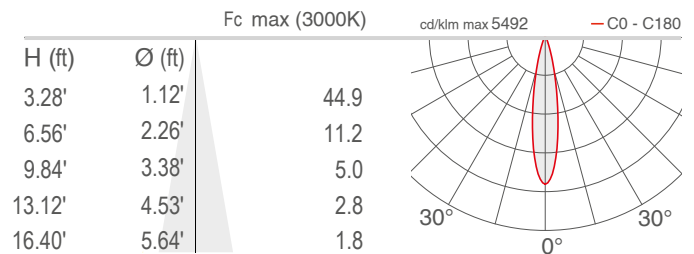

L - 40°

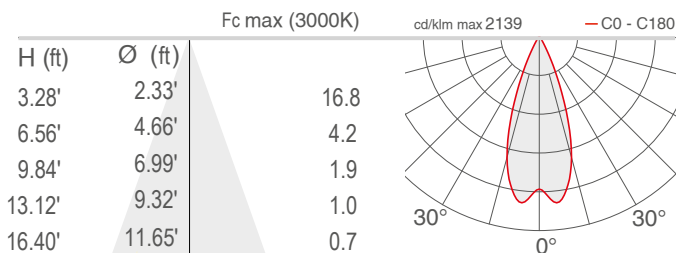

Job Name/Date:

Fixture Type Designation: