

# SPOT 2.4


The Spot 2.4 is an outdoor rated compact floodlight. Available in white light with 3 optic options and 3 standard finishes. Not suitable for swimming pools or fountains.

## TECHNICAL DATA

|                    |                                                                                                                                                       |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Wattage / Input    | 8W (120VAC)                                                                                                                                           |
| Power Supply       | Integral                                                                                                                                              |
| Construction       | Body: Anticorodal Aluminum<br>Bracket: Aluminum<br>Lens: Serigraphed-Gray & Transparent,<br>Tempered Extra-Clear Glass<br>Cable Length: 4.9' standard |
| CCT                | 2700K, 3000K, 4000K                                                                                                                                   |
| CRI                | >80                                                                                                                                                   |
| BUG Rating         | B1-U1-G0 (4000K, 34°)                                                                                                                                 |
| Delivered Lumens   | 515 lm (3000K)                                                                                                                                        |
| Efficacy           | 64.4 lm/W                                                                                                                                             |
| Optics             | 3 Standard (see below)                                                                                                                                |
| Finishes           | 3 Standard, Custom RAL on request<br>(4 Stage Marine Grade Finish)                                                                                    |
| Fixture Dimensions | Ø 2.36" x 4.88" l x 5.63" h                                                                                                                           |
| Fixture Weight     | 1.54 lbs                                                                                                                                              |
| LED Source         | 1 Power High Intensity LED                                                                                                                            |
| Lumen Maintenance  | L85, B10 >50,000hrs (Ta 25°C)                                                                                                                         |
| Color Consistency  | 3-Step MacAdam                                                                                                                                        |
| Operating Temp.    | -4°F to +113°F                                                                                                                                        |
| IP Rating          | IP66                                                                                                                                                  |
| IK Rating          | IK07                                                                                                                                                  |



Fixture Dimensions

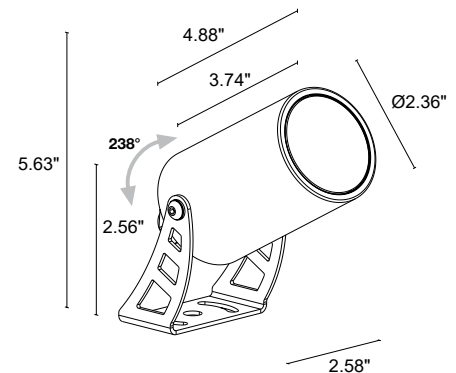

## ORDERING INFORMATION

Example: CF2410000090ME. Accessories / Power Supplies ordered separately.

|            |                                     |                                  |                                                                                                |
|------------|-------------------------------------|----------------------------------|------------------------------------------------------------------------------------------------|
| CF24100000 |                                     |                                  |                                                                                                |
| Model No.  | CCT                                 | Optics                           | Finish                                                                                         |
| CF24100000 | F - 2700K<br>5 - 3000K<br>9 - 4000K | 0S - 21°<br>0M - 29°<br>0L - 58° | H - Anthracite<br>5 - Jasper Green<br>E - White<br>C - Custom RAL<br>(consult factory for "C") |

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES

### Installation




**WP0100**

Ground Spike (10.1")



**WP1004**

Fastener Strap

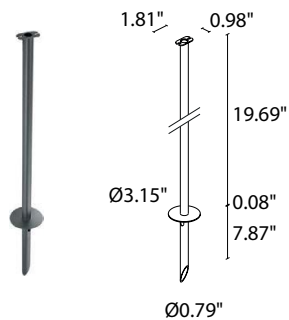

**WP1006\_**


Ground Spike (19.7")

Include one of the below finishes:

**5** - Jasper Green

**E** - White

**H** - Anthracite

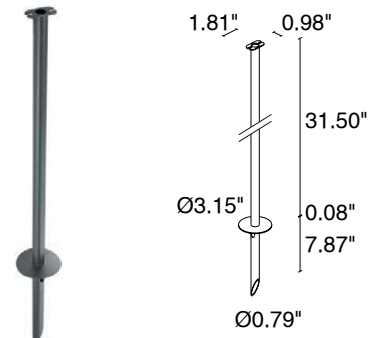

**WP1007\_**

Ground Spike (31.5")

Include one of the below finishes:

**5** - Jasper Green

**E** - White

**H** - Anthracite

## ACCESSORIES

### Anti-Glare



**WB1001\_**

Standard Snoot

Include one of the below finishes:

**5** - Jasper Green

**E** - White

**H** - Anthracite



**WB1002\_**

Asymmetrical Snoot

Include one of the below finishes:

**5** - Jasper Green

**E** - White

**H** - Anthracite


Job Name/Date:

Fixture Type Designation:


## PHOTOMETRIC DATA

Note all photometry in 3000K


### S - 20°

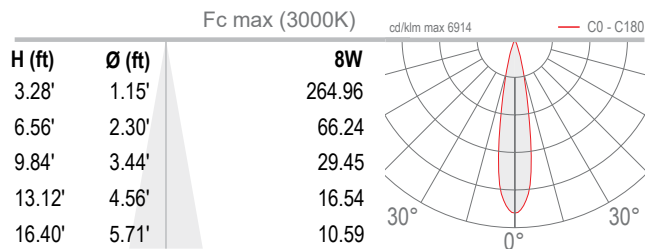

### M - 34°

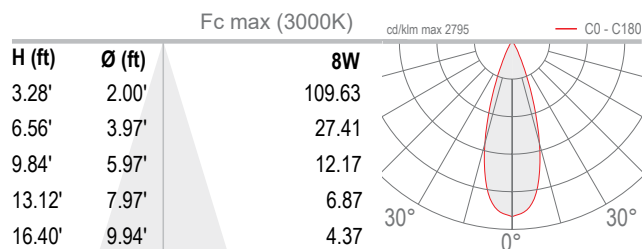

### L - 60°

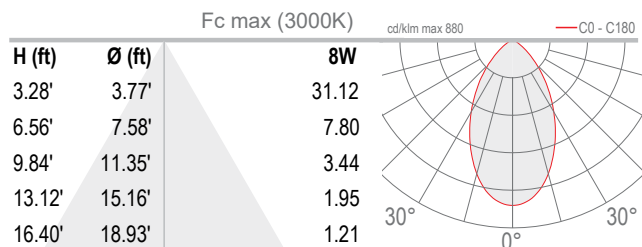

Job Name/Date:

Fixture Type Designation: