

SPOT 2.4


The Spot 2.4 is an outdoor rated compact floodlight. Available in white light with 3 optic options and 2 standard finishes. Not suitable for swimming pools or fountains.

TECHNICAL DATA

Wattage / Input	8W (120VAC)
Power Supply	Integral
Construction	Body/Bracket: Aluminum Alloy Anticorodal 6082 Lens: Transparent, Tempered Extra-Clear Glass Cable Length: 4.9' standard
CCT	2700K, 3000K, 4000K
CRI	>80
BUG Rating	B1-U1-G0 (4000K, 34°)
Delivered Lumens	515 lm (3000K)
Efficacy	64.4 lm/W
Optics	3 Standard (see below)
Finishes	2 Standard, Custom RAL on request (4 Stage Marine Grade Finish)
Fixture Dimensions	Ø 2.36" x 4.88" l x 5.63" h
Fixture Weight	1.54 lbs
LED Source	1 Power High Intensity LED
Lumen Maintenance	L85, B10 >50,000hrs (Ta 25°C)
Color Consistency	3-Step MacAdam
Operating Temp.	-4°F to +113°F
IP Rating	IP66
IK Rating	IK07



Fixture Dimensions

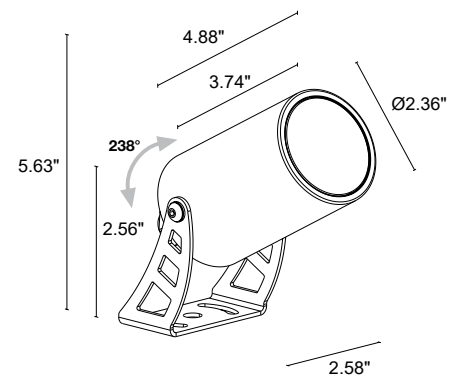

ORDERING INFORMATION

Example: CF2410000090ME. Accessories / Power Supplies ordered separately.

CF24100000			
Model No.	CCT	Optics	Finish
CF24100000	F0 - 2700K 50 - 3000K 90 - 4000K	S - 21° M - 29° L - 58°	H - Anthracite E - White C - Custom RAL (consult factory for "C")

Job Name/Date:


Fixture Type Designation:

ACCESSORIES


Installation



WP0100
Ground Spike (10.1")



WP1006E - White
WP1006H - Anthracite
Ground Spike (19.7")



WP1007E - White
WP1007H - Anthracite
Ground Spike (31.5")



WP1004
Fastener Strap

ACCESSORIES

Anti-Glare



WB1001E - White
WB1001H - Anthracite
Standard Snoot



WB1002E - White
WB1002H - Anthracite
Asymmetrical Snoot


Job Name/Date:

Fixture Type Designation:


PHOTOMETRIC DATA

Note all photometry in 3000K


S - 20°

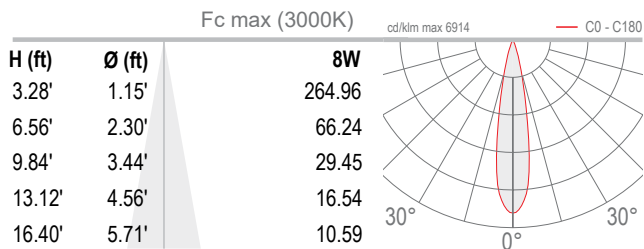

M - 34°

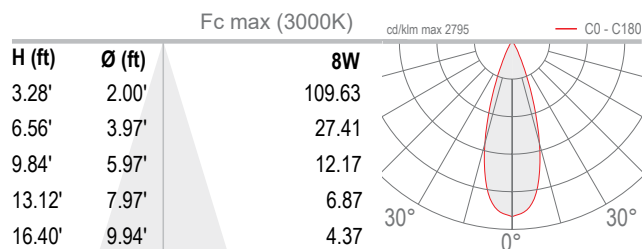

L - 60°

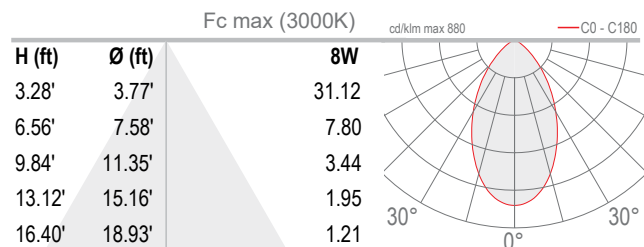

Job Name/Date:

Fixture Type Designation: