

SPOT 3.4


The Spot 3.4 is an surface mounted, outdoor rated, compact floodlight.
Available in white light with 3 optic options and 2 standard finishes.
Not suitable for swimming pools or fountains.

TECHNICAL DATA

Wattage / Input	15W (120VAC)
Power Supply	Integral
Construction	Body/Bracket: Aluminum Alloy Anticorodal 6082 Lens: Transparent, Tempered Extra-Clear Glass Cable Length: 4.9' standard
CCT	2700K, 3000K, 4000K
CRI	>80
BUG Rating	B1-U1-G0 (4000K, 39°)
Delivered Lumens	1042 lm (3000K, 39°)
Efficacy	69.5 lm/W
Optics	3 Standard (see below)
Finishes	2 Standard, Custom RAL on request (4 Stage Marine Grade Finish)
Fixture Dimensions	Ø 3.31" x 5.87" l x 7.13" h
Fixture Weight	2.65 lbs
LED Source	1 COB LED
Lumen Maintenance	L90, B10 >50,000hrs (Ta 25°C)
Color Consistency	3-Step MacAdam
Operating Temp.	-4°F to +113°F
IP Rating	IP66
IK Rating	IK09



Fixture Dimensions

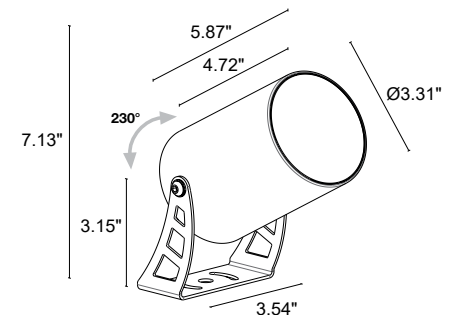

ORDERING INFORMATION

Example: CF3410000090ME. Accessories / Power Supplies ordered separately.


CF34100000			
Model No.	CCT	Optics	Finish
CF34100000	F0 - 2700K 50 - 3000K 90 - 4000K	S - 15° M - 39° L - 55°	H - Anthracite E - White C - Custom RAL (consult factory for "C")

Job Name/Date:


Fixture Type Designation:

ACCESSORIES


Installation



WP100
Ground Spike (10.1")



WP1006E - White
WP1006H - Anthracite
Ground Spike (19.7")



WP1007E - White
WP1007H - Anthracite
Ground Spike (31.5")



WP1004
Fastener Strap

ACCESSORIES

Anti-Glare



WB8010E - White
WB8010H - Anthracite
Standard Snoot



WB8020E - White
WB8020H - Anthracite
Asymmetrical Snoot


Job Name/Date:

Fixture Type Designation:


PHOTOMETRIC DATA

Note all photometry in 3000K


S – 15°

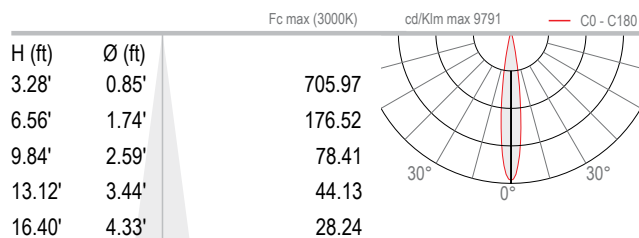

M – 39°

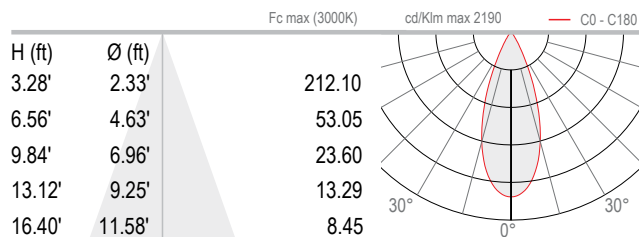

L – 55°

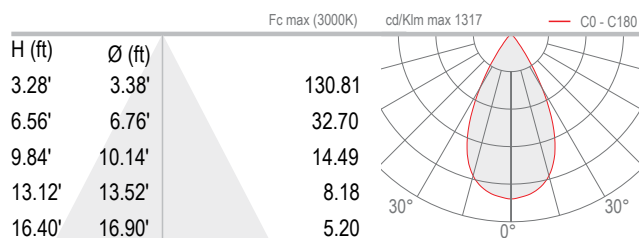

Job Name/Date:

Fixture Type Designation: