


Square is an ADA compliant vandal resistant luminaire offering high performance, strength, and durability for any demanding applications. Available in surface or semi-recessed models. **ADA Compliant.**



Surface Mount

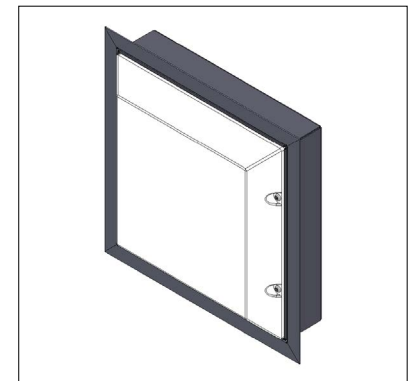

Semi-Recessed Mount

TECHNICAL DATA

Wattage	18W
Power Supply	Integral 120-277VAC
Dimming	Non-dim and 0-10V Dimming
Construction	Body: 1.2mm Thick Zinc Coated Steel Finish: Powder Polyester Finish Lens: 0.12" Opal Polycarbonate Lens Screws: Tamper Resistant Stainless Steel
CCT	3000K, 4000K
CRI	>80
Delivered Lumens	897 lm
Efficacy	49.8 lm/W
Optics	Diffuse
Finishes	Black, White
Fixture Dimensions	See drawings on page 2.
IP Rating	IP65
Impact Rating	IK14

ORDERING INFORMATION

Example: **ATSQ/1950 SF W 30 ND 0**


ATSQ/1950					
Model No.	Mounting	Finish	CCT	Output	Options
ATSQ/1950	SF - Surface SR - Semi-Recessed	W - White B - Black	30 - 3000K 40 - 4000K	ND - No dimming 10V - 0-10V dimming	0 - None 1 - Emergency SCE - Surface Conduit Entry ECE - End Conduit Entry

Job Name/Date:




Fixture Type Designation:

FIXTURE DIMENSIONS

Surface Mount Fixture Dimensions

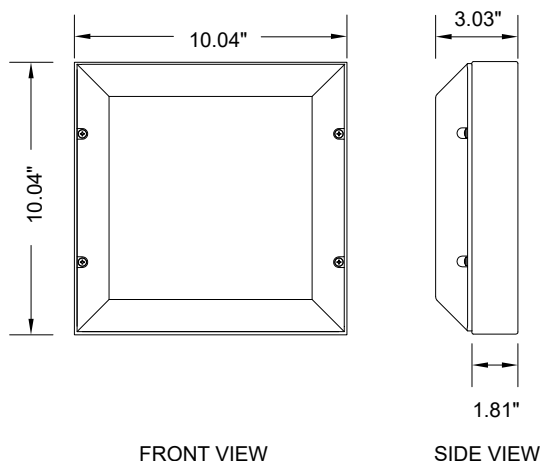


Semi-Recessed Fixture Dimensions

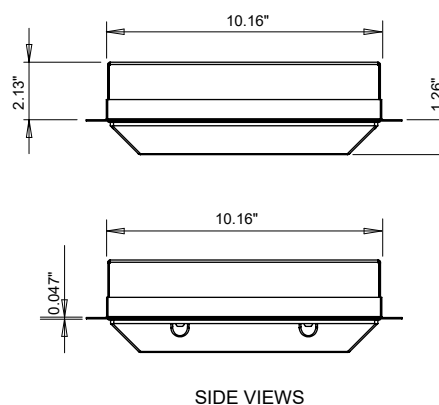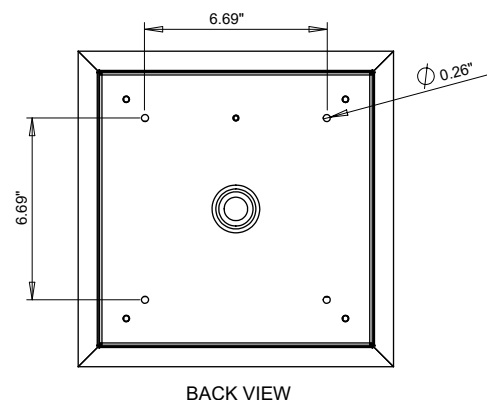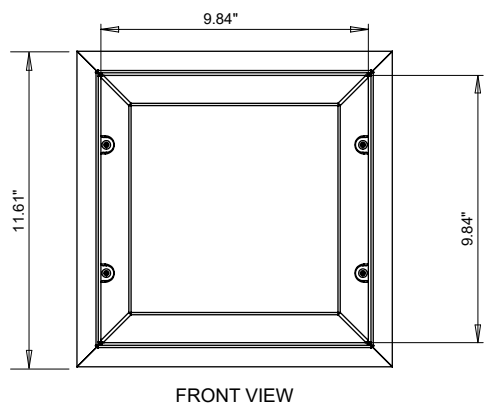

PHOTOMETRIC DATA

Maximum Candela = 273

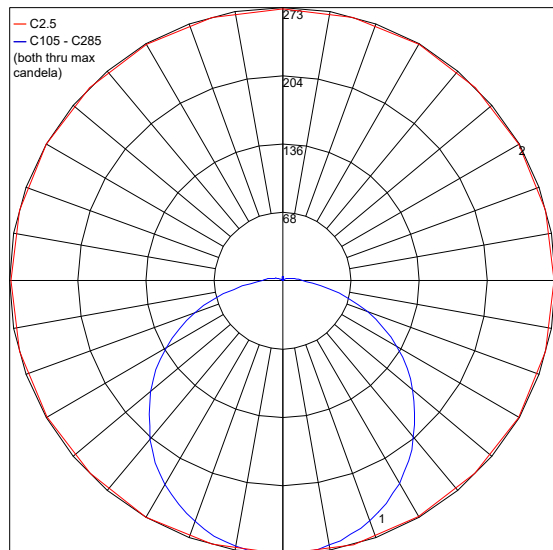

Job Name/Date:

Fixture Type Designation: