


Square is an ADA compliant vandal resistant luminaire offering high performance, strength, and durability for any demanding applications. Available in surface or semi-recessed models. **ADA Compliant.**



Surface Mount

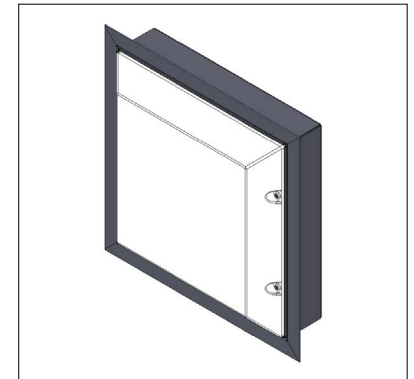

Semi-Recessed Mount

## TECHNICAL DATA

<b>Wattage / Input</b>	18W (120-277VAC)
<b>Power Supply</b>	Integral. Non-dim and 0-10V Dimming
<b>Construction</b>	Body: Zinc Coated Steel Plate Finish: Powder Polyester Finish Lens: 0.12" Opal Polycarbonate Lens Screws: Tamper Resistant Stainless Steel
<b>CCT</b>	3000K, 4000K
<b>CRI</b>	>80
<b>Delivered Lumens</b>	897 lm
<b>Efficacy</b>	49.8 lm/W
<b>Optics</b>	Diffuse
<b>Finishes</b>	Black, White
<b>Fixture Dimensions</b>	See drawings on page 2.
<b>IP Rating</b>	IP65
<b>Impact Rating</b>	IK14

## ORDERING INFORMATION

Example: **ATSQ/1950 SF W 30 ND 0**


<b>ATSQ/1950</b>					
<b>Model No.</b>	<b>Mounting</b>	<b>Finish</b>	<b>CCT</b>	<b>Output</b>	<b>Options</b>
<b>ATSQ/1950</b>	<b>SF</b> - Surface <b>SR</b> - Semi-Recessed	<b>W</b> - White <b>B</b> - Black	<b>30</b> - 3000K <b>40</b> - 4000K	<b>ND</b> - No dimming <b>10V</b> - 0-10V dimming	<b>0</b> - None <b>1</b> - Emergency <b>SCE</b> - Surface Conduit Entry <b>ECE</b> - End Conduit Entry

Job Name/Date:




Fixture Type Designation:

## FIXTURE DIMENSIONS

### Surface Mount Fixture Dimensions

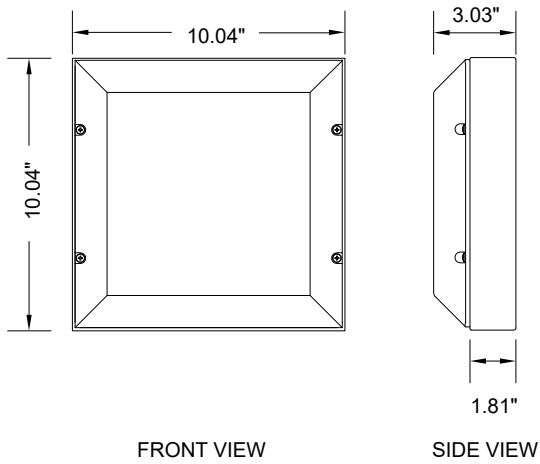


### Semi-Recessed Fixture Dimensions

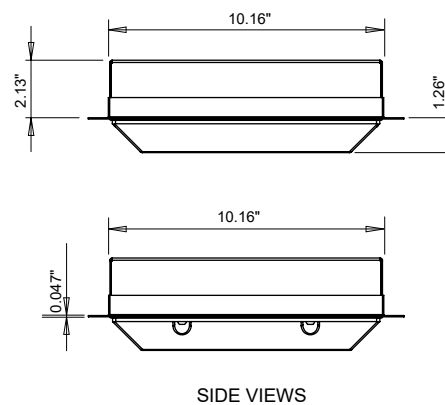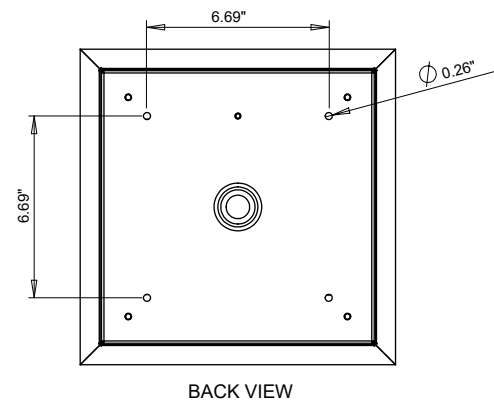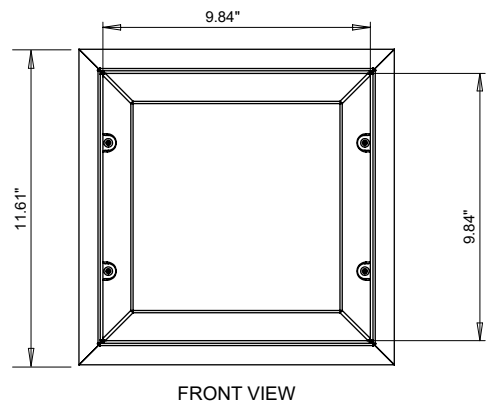

## PHOTOMETRIC DATA

Maximum Candela = 273

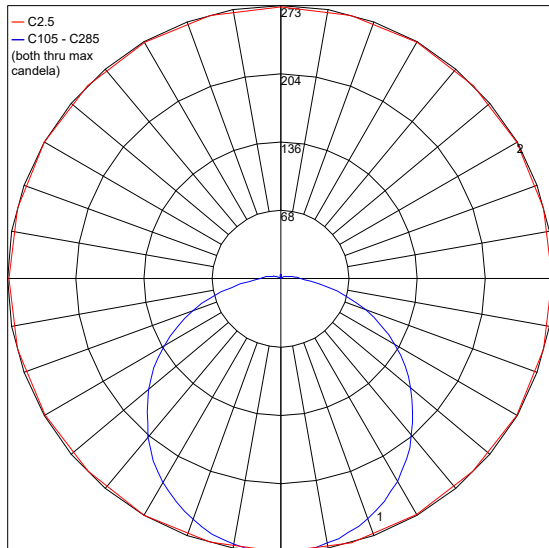

Job Name/Date:

Fixture Type Designation: