

# STEP INSIDE 2.2

The Step Inside 2 Series are discreet semi-recessed LED wall-mounted step lights ideal for illuminating indoor pathways and stairs. Available in 2 styles (square and round) and 6 standard finishes.


## TECHNICAL DATA

|                    |                                                                              |
|--------------------|------------------------------------------------------------------------------|
| Wattage / Input    | 2W (500mA)                                                                   |
| Power Supply       | Remote, not included. See page 2.                                            |
| Construction       | Body: Aluminum<br>Lens: Transparent Extra Clear Glass<br>Cable Length: 4.92' |
| CCT                | 2700K, 3000K, 4000K, 5000K, Blue                                             |
| CRI                | CRI>80                                                                       |
| Delivered Lumens   | 35 lm (3000K, 500mA)                                                         |
| Efficacy           | 17.5 lm/W                                                                    |
| Optics             | Diffuse                                                                      |
| Finishes           | 6 Standard, Custom RAL (see below - chart page 3)                            |
| Cut-Out Dimensions | Ø1.18"                                                                       |
| Fixture Dimensions | 1.5" l x 0.71" w x 1.5" h                                                    |
| Fixture Weight     | 0.40 lbs                                                                     |
| LED Source         | 1 Power LED                                                                  |
| Lumen Maintenance  | L90, B10 >50,000hrs (Ta 25°C)                                                |
| Color Consistency  | 1/4 ANSI BIN                                                                 |
| Operating Temp.    | 32°F to +113°F                                                               |
| IP Rating          | IP40                                                                         |
| Impact Rating      | IK03                                                                         |



ADA Compliant

Wall Cut-Out: Ø1.18"  
Fixture Dimensions  
1.5" l x 0.71" w x 1.5" h

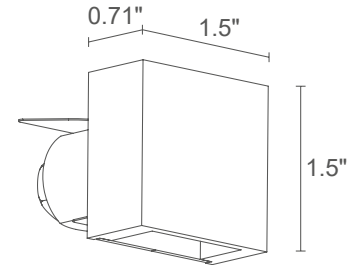

## ORDERING INFORMATION

Example: SP22129DS. Accessories / Power Supplies ordered separately.

| SP2212    |                                                              | D           |                                                                                                                                                                      |
|-----------|--------------------------------------------------------------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model No. | CCT                                                          | Optics      | Finish                                                                                                                                                               |
| SP2212    | F - 2700K<br>5 - 3000K<br>9 - 4000K<br>0 - 5000K<br>1 - Blue | D - Diffuse | E - White<br>C - Chrome<br>S - Satin<br>N - Black<br>T - Cor-ten<br>4 - Light Ivory<br>C - Custom RAL Number Only<br>NO STAINLESS STEEL<br>(consult factory for "C") |

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

500mA


| Part Number                 | Description                                        | Input/Output                        | # of Fixtures |
|-----------------------------|----------------------------------------------------|-------------------------------------|---------------|
| <a href="#">PPLT00497</a>   | Phase Dim (120V only)                              | 120VAC to 500mA, 12W, Class 2       | 2-6           |
| <a href="#">PPLT00465-P</a> | 0-10V Dimming to 1.0%                              | 120-277VAC to 500mA, 20W, Class 2   | 1-10          |
| <a href="#">PPLT00262</a>   | Leading / Trailing Edge Dimming to 10% (120V only) | 120VAC to 500mA, 26W, IP67, Class 2 | 8-14          |
| <a href="#">PPLT00309-P</a> | 0-10V Dimming to 0.1%                              | 120-277VAC to 500mA, 50W, Class 2   | 1-16          |
| <a href="#">PPLT00538-P</a> | 0-10V Dimming to 0.1%                              | 120-277VAC to 500mA, 100W, Class 2  | 1-48          |

## Suggested Lutron Compatible

| Part Number               | Option         | Lutron SKU | Dim Range | Description                                    | Input/Output                      | # of Fixtures |
|---------------------------|----------------|------------|-----------|------------------------------------------------|-----------------------------------|---------------|
| <a href="#">PPLT00259</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 500mA, 10W, Class 2 | 4-5           |
| <a href="#">PPLT00195</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 500mA, 19W, Class 2 | 6-9           |
| <a href="#">PPLT00180</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 500mA, 27W, Class 2 | 12-13         |

For other power supply options consult factory.

## ACCESSORIES - Installation

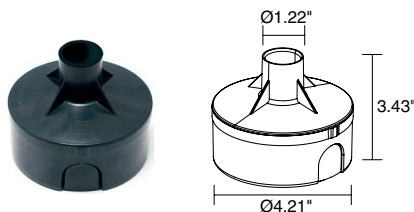

### WC0202

Outer Casing

Job Name/Date:




Fixture Type Designation:

## STANDARD FINISHES



## PHOTOMETRIC DATA

Note all Photometry is 3000K

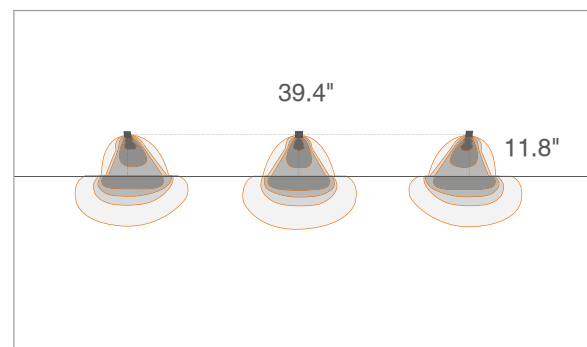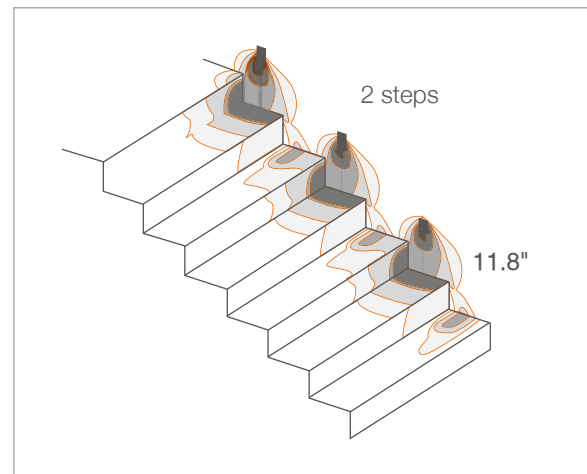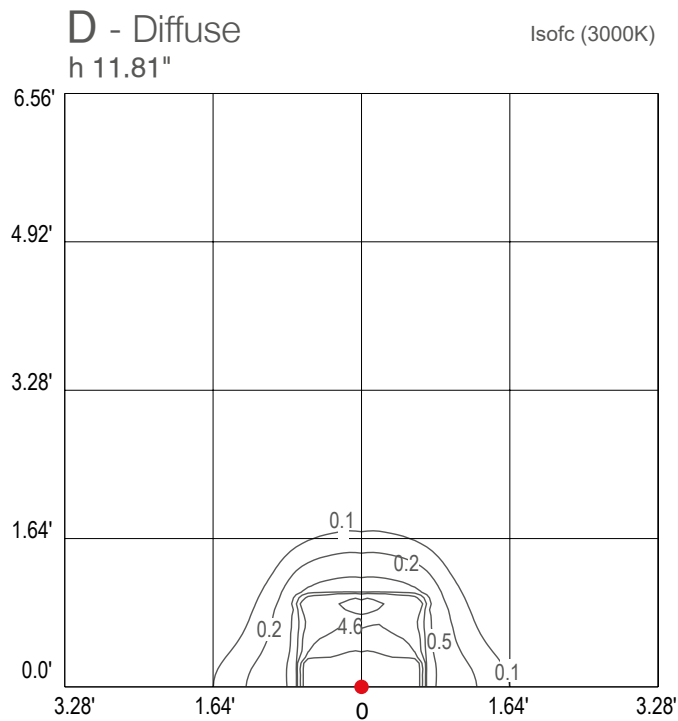

Job Name/Date:

Fixture Type Designation: