

# STEP INSIDE

## INDOOR STEP LIGHTS ORIENTATION LIGHT

INDOOR



**SQUARE COVER**



**ROUND COVER**

SEMI-RECESSED



diffuse

2700K 3000K 4000K 5000K blue



**STEP INSIDE 2.2**  
2W 500mA  
constant current



**STEP INSIDE 2.3**  
2W 500mA  
constant current





**STEP INSIDE 2.8**  
2W 24VDC  
constant voltage




**STEP INSIDE 2.9**  
2W 24VDC  
constant voltage

OUTDOOR

STEP OUTSIDE

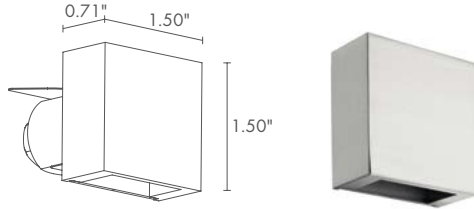

## STEP INSIDE 2.2



### POWER / MODEL CODE

2W 500mA  
**SP2212** **D E** White  
**SP2212** **D C** Chrome  
**SP2212** **D S** Satin  
**SP2212** **D N** Black  
**SP2212** **D T** Cor-ten  
**SP2212** **D 4** Light ivory

### LED COLOR

**F** - 2700K  
**5** - 3000K  
**9** - 4000K  
**0** - 5000K  
**1** - blue

### OPTICS

diffuse

LUMEN OUTPUT AT SOURCE 145 lm (3000K, 500mA)

DELIVERED LUMEN OUTPUT 35 lm (3000K, 500mA)

NO. AND TYPE OF LED 1 power LED  
 1/4 ANSI BIN (white LED color)  
 50000h L90 B10 (Ta 25°C)

MATERIAL body and cover in aluminum  
 lens in transparent extra-clear glass

POWER SUPPLY UNIT remote power supply required, not included



POWER CABLES includes 4.92 ft PVC cable  
 FROR 2x0.35/0.35 Ø0.14 in

WIRING series


MOUNTING semi-recessed (wall)

ACCESSORIES see accessories page

NOTES outdoor version: Step Outside 2.0

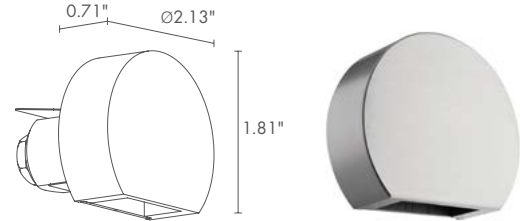

## STEP INSIDE 2.3



2W 500mA  
**SP2312** **D E** White  
**SP2312** **D C** Chrome  
**SP2312** **D S** Satin  
**SP2312** **D N** Black  
**SP2312** **D T** Cor-ten  
**SP2312** **D 4** Light ivory

**F** - 2700K  
**5** - 3000K  
**9** - 4000K  
**0** - 5000K  
**1** - blue

diffuse

145 lm (3000K, 500mA)

35 lm (3000K, 500mA)

1 power LED  
 1/4 ANSI BIN (white LED color)  
 50000h L90 B10 (Ta 25°C)

body and cover in aluminum  
 lens in transparent extra-clear glass

remote power supply required, not included



includes 4.92 ft PVC cable  
 FROR 2x0.35/0.35 Ø0.14 in

series



semi-recessed (wall)

see accessories page

outdoor version: Step Outside 2.1

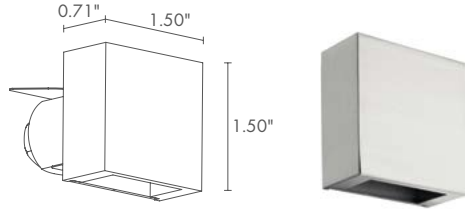

## STEP INSIDE 2.8



- 2W 24VDC
- SP2800** **D E** White
  - SP2800** **D C** Chrome
  - SP2800** **D S** Satin
  - SP2800** **D N** Black
  - SP2800** **D T** Cor-ten
  - SP2800** **D 4** Light ivory

- F** - 2700K
- 5** - 3000K
- 9** - 4000K
- 0** - 5000K
- 1** - blue

diffuse

145 lm (3000K)

35 lm (3000K)

1 power LED  
1/4 ANSI BIN (white LED color)  
50000h L90 B10 (Ta 25°C)

body and cover in aluminum  
lens in transparent extra-clear glass

remote power supply required, not included



includes 4.92 ft PVC cable  
FROR 2x0.35/0.35 Ø0.14 in

parallel


semi-recessed (wall)

see accessories page

outdoor version: Step Outside 2.6

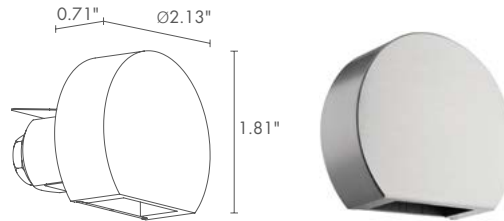

## STEP INSIDE 2.9



- 2W 24VDC
- SP2900** **D E** White
  - SP2900** **D C** Chrome
  - SP2900** **D S** Satin
  - SP2900** **D N** Black
  - SP2900** **D T** Cor-ten
  - SP2900** **D 4** Light ivory

- F** - 2700K
- 5** - 3000K
- 9** - 4000K
- 0** - 5000K
- 1** - blue

diffuse

145 lm (3000K)

35 lm (3000K)

1 power LED  
1/4 ANSI BIN (white LED color)  
50000h L90 B10 (Ta 25°C)

body and cover in aluminum  
lens in transparent extra-clear glass

remote power supply required, not included


includes 4.92 ft PVC cable  
FROR 2x0.35/0.35 Ø0.14 in

parallel

semi-recessed (wall)

see accessories page



outdoor version: Step Outside 2.7



**POSITIONING  
DIAGRAMS**

**STEP INSIDE 2.2 / 2.3 / 2.8 / 2.9**

**D - Diffuse**

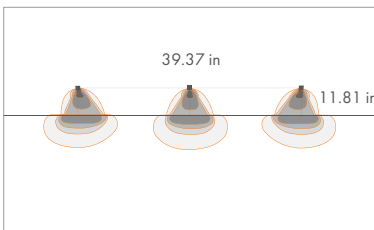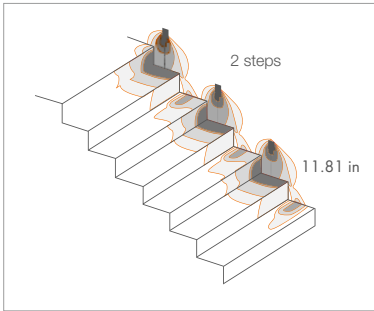

**STANDARD FINISHES**




## ACCESSORIES AND POSITIONING DIAGRAMS

### ACCESSORIES FOR INSTALLATION



**WC0202**  
Outer casing

STEP INSIDE 2.3  
3000K, 2W, white

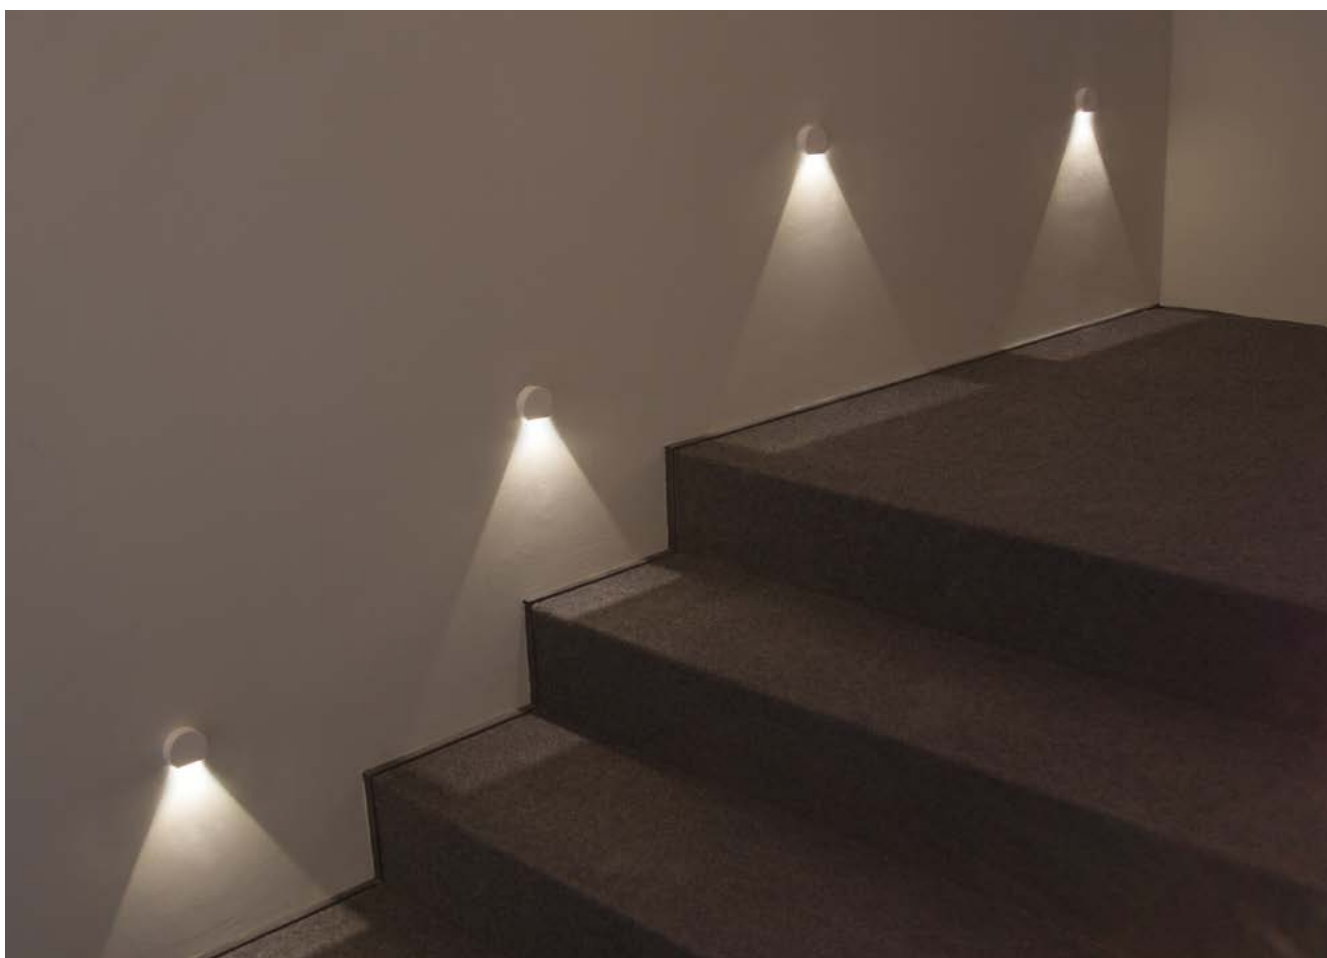

# STEP INSIDE

## INDOOR STEP LIGHTS

### STEP INSIDE 2.2

2.3

2.8

2.9

D - Diffuse

Isolux (3000K)

