

# STEP OUTSIDE 5.2


The Step Outside 5 & 6 series are recessed LED wall-mounted spotlights, ideal for pathway and stair lighting. Available in 5 different styles (round and square) and 4 standard finishes.

## TECHNICAL DATA

|                    |                                                                                                         |
|--------------------|---------------------------------------------------------------------------------------------------------|
| Wattage / Input    | 2W (500mA)                                                                                              |
| Power Supply       | Remote, not included. See page 2.                                                                       |
| Construction       | Body: Aluminum<br>Trim: Stainless Steel<br>Lens: Transparent Plexiglass<br>Cable Length: 4.92' standard |
| CCT                | 2700K, 3000K, 4000K, 5000K, Blue                                                                        |
| CRI                | >80                                                                                                     |
| Delivered Lumens   | 42 lm (3000K, 500mA)                                                                                    |
| Efficacy           | 21 lm/W                                                                                                 |
| Optics             | Asymmetric                                                                                              |
| Finishes           | White, Black, Cor-ten, Satin, Custom RAL<br>(4 Stage Marine Grade Finish)                               |
| Cut-Out Dimensions | Ø1.77"                                                                                                  |
| Fixture Dimensions | Ø2.17" x 2.05" h                                                                                        |
| Fixture Weight     | 0.53 lbs                                                                                                |
| LED Source         | 1 Power LED                                                                                             |
| Lumen Maintenance  | L90, B10 >50,000hrs (Ta 25°C)                                                                           |
| Color Consistency  | 1/4 ANSI BIN                                                                                            |
| Operating Temp.    | -4°F to +113°F                                                                                          |
| IP Rating          | IP65                                                                                                    |
| Impact Rating      | —                                                                                                       |
| JA8                | Exempt                                                                                                  |



Wall Cut-Out: Ø1.77"  
Fixture Dimensions  
Ø2.17" x 2.05" I

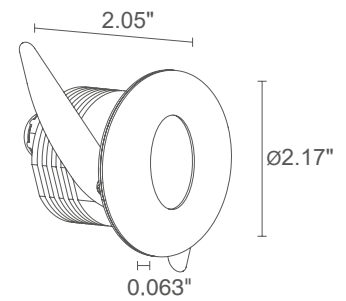

## ORDERING INFORMATION

Example: SP52129AAE or SP52129AAE-3. Accessories / Power Supplies ordered separately.

| SP5212    |                                                              | A              |                                                                                                       |                                                                        |
|-----------|--------------------------------------------------------------|----------------|-------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|
| Model No. | CCT                                                          | Optics         | Finish                                                                                                | Cable Length                                                           |
| SP5212    | F - 2700K<br>5 - 3000K<br>9 - 4000K<br>0 - 5000K<br>1 - Blue | A - Asymmetric | AE - White<br>AN - Black<br>AT - Cor-ten<br>AS - Satin<br>C - Custom RAL<br>(consult factory for "C") | 4.92' standard<br>1 - 16.40'<br>2 - 32.81'<br>3 - 49.21'<br>4 - 65.62' |

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

500mA

| Part Number                 | Description           | Input/Output                       | # of Fixtures |
|-----------------------------|-----------------------|------------------------------------|---------------|
| <a href="#">PPLT00497</a>   | Phase Dim (120V only) | 120VAC to 500mA, 12W, Class 2      | 2-6           |
| <a href="#">PPLT00465-P</a> | 0-10V Dimming to 1.0% | 120-277VAC to 500mA, 20W, Class 2  | 1-10          |
| <a href="#">PPLT00309-P</a> | 0-10V Dimming to 0.1% | 120-277VAC to 500mA, 50W, Class 2  | 1-16          |
| <a href="#">PPLT00561-P</a> | 0-10V Dimming to 0.1% | 120-277VAC to 500mA, 100W, Class 2 | 2-17          |

## Suggested Lutron Compatible

| Part Number               | Option         | Lutron SKU | Dim Range | Description                                    | Input/Output                      | # of Fixtures |
|---------------------------|----------------|------------|-----------|------------------------------------------------|-----------------------------------|---------------|
| <a href="#">PPLT00259</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 500mA, 10W, Class 2 | 4-5           |
| <a href="#">PPLT00195</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 500mA, 19W, Class 2 | 6-9           |
| <a href="#">PPLT00180</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC to 500mA, 27W, Class 2 | 12-13         |


For other power supply options consult factory.

## ACCESSORIES


### Installation



**WC1501**  
Outer Casing



**PPMP03113**  
Core Drilled  
Application Sleeve

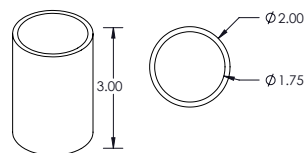



Job Name/Date:

Fixture Type Designation:

# STEP OUTSIDE 5.2

## PHOTOMETRIC DATA

Note all Photometry is 3000K

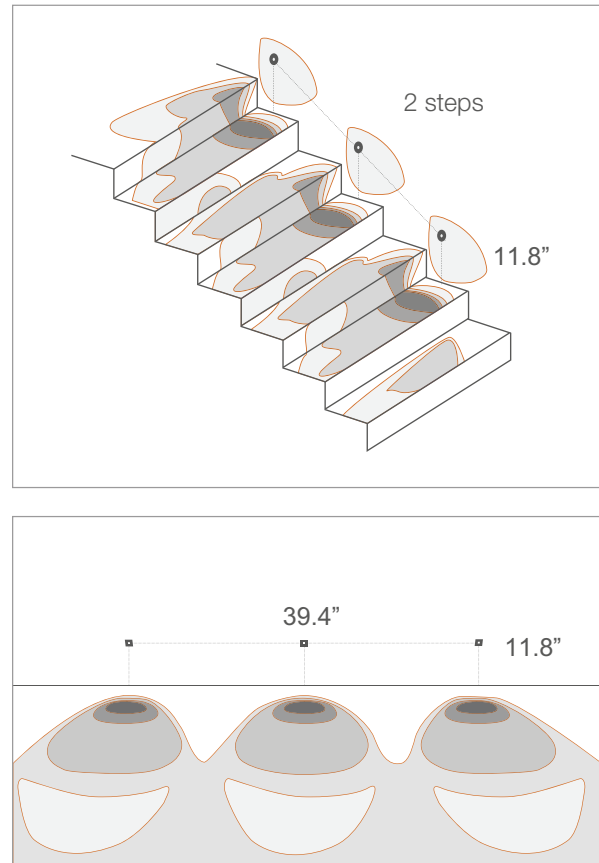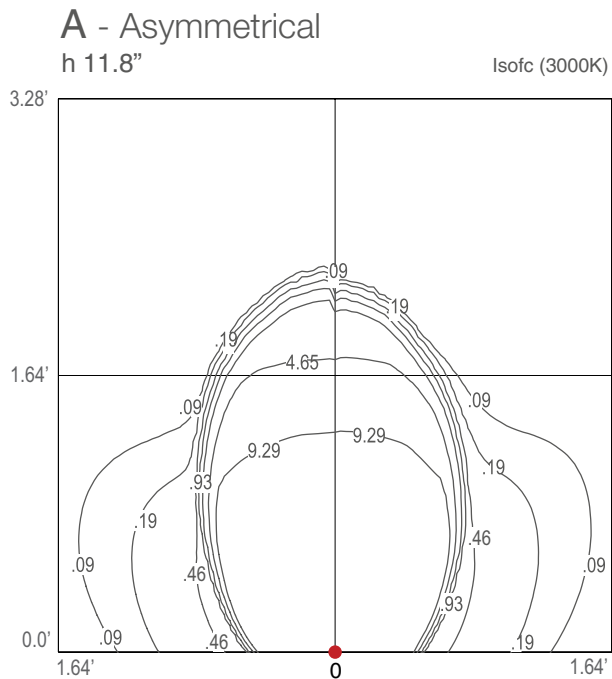

Job Name/Date:

Fixture Type Designation: