



< STEP OUTSIDE 5.2


3000K, 2W, customized version
with anthracite finish

Project by / arch. Fernanda Cantone
Light planning by / Light Style
Castello Tafuri Charming Suites
Portopalo di Capo Passero, Syracuse, Italy

SQUARE COVER

SEMI-RECESSED

2700K 3000K 4000K 5000K blue



diffuse



STEP OUTSIDE 2.0

2W 500mA
constant current




STEP OUTSIDE 2.6

2W 24VDC
constant voltage

RECESSED

2700K 3000K 4000K 5000K blue



asymmetrical



STEP OUTSIDE 6.1

2W 500mA
constant current



STEP OUTSIDE 6.2

2W 500mA
constant current




STEP OUTSIDE 6.3

2W 500mA
constant current

SURFACE MOUNTED

3000K 4000K 5000K



diffuse



STEP OUTSIDE 7.0

3.5W 24VDC
constant voltage



STEP OUTSIDE 8.0

3.5W 24VDC
constant voltage

INDOOR

STEP INSIDE 2




Designplan | L&L Luce&Light

STEP OUTSIDE

OUTDOOR STEP LIGHTS ORIENTATION LIGHT AND LIGHTING FOR WALKWAYS AND STEPS

ROUND COVER

SEMI-RECESSED




STEP OUTSIDE 2.1
2W 500mA
constant current



STEP OUTSIDE 2.7
2W 24VDC
constant voltage

RECESSED



STEP OUTSIDE 5.1
2W 500mA
constant current





STEP OUTSIDE 5.2
2W 500mA
constant current


INDOOR

STEP INSIDE 2



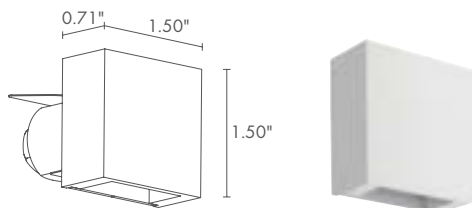

STEP OUTSIDE 2.0



POWER / MODEL CODE

2W 500mA
SP2012 **D A E** - ■ White
SP2012 **D A N** - ■ Black
SP2012 **D A T** - ■ Cor-ten

LED COLOR

F - 2700K
5 - 3000K
9 - 4000K
0 - 5000K
1 - blue

POWER CABLES

includes 4.92 ft neoprene cable
H05RN-F 2x0.35/0.75 Ø0.25 in
1 - 16.40 ft
2 - 32.81 ft
3 - 49.21 ft
4 - 65.62 ft

OPTICS

diffuse

LUMEN OUTPUT AT SOURCE 145 lm (3000K, 500mA)

DELIVERED LUMEN OUTPUT 35 lm (3000K, 500mA)

NO. AND TYPE OF LED 1 power LED
1/4 ANSI BIN (white LED color)
50000h L90 B10 (Ta 25°C)

MATERIAL body and cover in aluminum
lens in transparent extra-clear glass



POWER SUPPLY UNIT remote power supply required, not included

WIRING series

MOUNTING semi-recessed (wall)

ACCESSORIES see accessories page

NOTES indoor version: Step Inside 2.2, p. 706
certified ETL version available on request

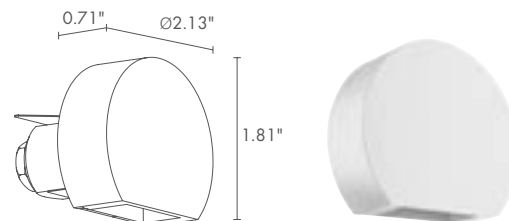

STEP OUTSIDE 2.1



2W 500mA
SP2112 **D A E** - ■ White
SP2112 **D A N** - ■ Black
SP2112 **D A T** - ■ Cor-ten

F - 2700K
5 - 3000K
9 - 4000K
0 - 5000K
1 - blue

includes 4.92 ft neoprene cable
H05RN-F 2x0.35/0.75 Ø0.25 in
1 - 16.40 ft
2 - 32.81 ft
3 - 49.21 ft
4 - 65.62 ft

diffuse

145 lm (3000K, 500mA)

35 lm (3000K, 500mA)

1 power LED
1/4 ANSI BIN (white LED color)
50000h L90 B10 (Ta 25°C)

body and cover in aluminum
lens in transparent extra-clear glass

remote power supply required, not included



series

semi-recessed (wall)



see accessories page

indoor version: Step Inside 2.3, p. 706
certified ETL version available on request



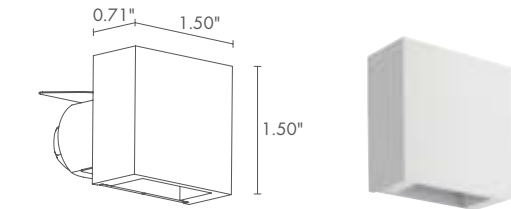

STEP OUTSIDE 2.6



2W 24VDC

SP2600 **D E** - ■ White
SP2600 **D N** - ■ Black
SP2600 **D T** - ■ Cor-ten

F - 2700K
5 - 3000K
9 - 4000K
0 - 5000K
1 - blue

includes 4.92 ft neoprene cable
H05RN-F 2x0.35/0.75 Ø0.25 in
1 - 16.40 ft
2 - 32.81 ft
3 - 49.21 ft
4 - 65.62 ft

diffuse

145 lm (3000K)

35 lm (3000K)

1 power LED
1/4 ANSI BIN (white LED color)
50000h L90 B10 (Ta 25°C)

body and cover in aluminum
lens in transparent extra-clear glass



remote power supply required, not included

parallel


semi-recessed (wall)

see accessories page

indoor version: Step Inside 2.8
certified ETL version available on request

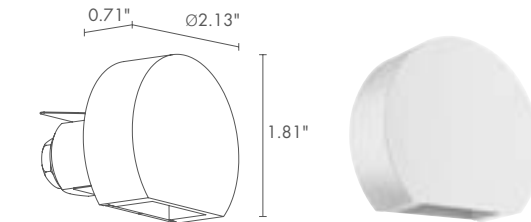

STEP OUTSIDE 2.7



2W 24VDC

SP2700 **D E** - ■ White
SP2700 **D N** - ■ Black
SP2700 **D T** - ■ Cor-ten

F - 2700K
5 - 3000K
9 - 4000K
0 - 5000K
1 - blue

includes 4.92 ft neoprene cable
H05RN-F 2x0.35/0.75 Ø0.25 in
1 - 16.40 ft
2 - 32.81 ft
3 - 49.21 ft
4 - 65.62 ft

diffuse

145 lm (3000K)

35 lm (3000K)

1 power LED
1/4 ANSI BIN (white LED color)
50000h L90 B10 (Ta 25°C)

body and cover in aluminum
lens in transparent extra-clear glass

remote power supply required, not included

parallel

semi-recessed (wall)

see accessories page

indoor version: Step Inside 2.9
certified ETL version available on request







STEP OUTSIDE 5.1

Ø 2.76 in
H 3.54 in

Ø 1.77 in

LED TECH 0.53 lbs IP65
IPS CASAMBI

POWER / MODEL CODE

2W 500mA
SP5112 **A A E** - White
SP5112 **A A S** - Satin
SP5112 **A A N** - Black
SP5112 **A A T** - Cor-ten

LED COLOR

F - 2700K
5 - 3000K
9 - 4000K
0 - 5000K
1 - blue

POWER CABLES

includes 4.92 ft neoprene cable
H05RN-F 2x0.35/0.75 Ø0.25 in
1 - 16.40 ft
2 - 32.81 ft
3 - 49.21 ft
4 - 65.62 ft

OPTICS

asymmetrical

LUMEN OUTPUT AT SOURCE 145 lm (3000K, 500mA)

DELIVERED LUMEN OUTPUT 34 lm (3000K, 500mA)

NO. AND TYPE OF LED 1 power LED
1/4 ANSI BIN (white LED color)
50000h L90 B10 (Ta 25°C)

MATERIAL body in aluminum, cover in stainless steel
lens in transparent plexiglass

POWER SUPPLY UNIT remote power supply required, not included

WIRING series

MOUNTING recessed (wall)

ACCESSORIES see accessories page

NOTES certified ETL version available on request

STEP OUTSIDE 5.2

Ø 2.76 in
H 3.54 in

Ø 1.77 in

LED TECH 0.53 lbs IP65
IPS CASAMBI

2W 500mA
SP5212 **A A E** - White
SP5212 **A A S** - Satin
SP5212 **A A N** - Black
SP5212 **A A T** - Cor-ten

F - 2700K
5 - 3000K
9 - 4000K
0 - 5000K
1 - blue

includes 4.92 ft neoprene cable
H05RN-F 2x0.35/0.75 Ø0.25 in
1 - 16.40 ft
2 - 32.81 ft
3 - 49.21 ft
4 - 65.62 ft

asymmetrical

145 lm (3000K, 500mA)

42 lm (3000K, 500mA)

1 power LED
1/4 ANSI BIN (white LED color)
50000h L90 B10 (Ta 25°C)

body in aluminum, cover in stainless steel
lens in transparent plexiglass


remote power supply required, not included

series

recessed (wall)

see accessories page

certified ETL version available on request



< STEP OUTSIDE 5.2


3000K, 2W, customized version
with anthracite finish

Project by / arch. Fernanda Cantone
Light planning by / Light Style
Castello Tafuri Charming Suites
Portopalo di Capo Passero, Syracuse, Italy



Designplan | L&L Luce&Light

✓
STEP OUTSIDE 6.3
3000K, 2W, satin
SPOT 1.0
3000K, 2W, 20°
Private residence, Positano, Salerno, Italy

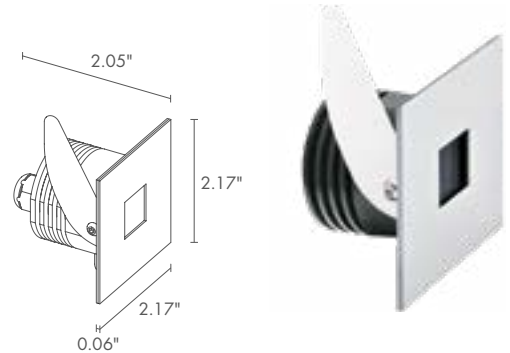


STEP OUTSIDE 6.1

Ø 2.76 in
H 3.54 in
Ø 1.77 in

LED TECH
0.53 lbs IP65
IPS CASAMBI

POWER / MODEL CODE		2W 500mA SP6112  A A E -  White SP6112  A A S -  Satin SP6112  A A N -  Black SP6112  A A T -  Cor-ten
 LED COLOR	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - blue	
 POWER CABLES	includes 4.92 ft neoprene cable H05RN-F 2x0.35/0.75 Ø0.25 in 1 - 16.40 ft 2 - 32.81 ft 3 - 49.21 ft 4 - 65.62 ft	
OPTICS	asymmetrical	
LUMEN OUTPUT AT SOURCE	145 lm (3000K, 500mA)	
DELIVERED LUMEN OUTPUT	29 lm (3000K, 500mA)	
NO. AND TYPE OF LED	1 power LED 1/4 ANSI BIN (white LED color) 50000h L90 B10 (Ta 25°C)	
MATERIAL	body in aluminum, cover in stainless steel lens in transparent plexiglass	
POWER SUPPLY UNIT	remote power supply required, not included	
WIRING	series	
MOUNTING	recessed (wall)	
ACCESSORIES	see accessories page	
NOTES	certified ETL version available on request	



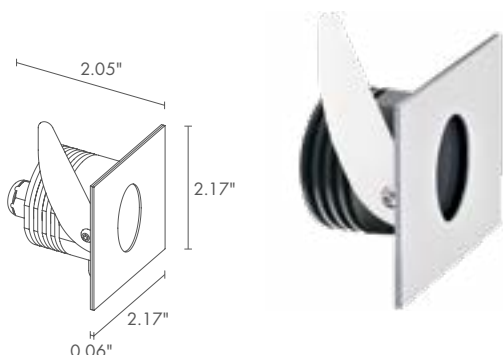

STEP OUTSIDE 6.2

Ø 2.76 in
H 3.54 in
Ø 1.77 in

LED TECH
0.53 lbs IP65
IPS CASAMBI


2W 500mA

SP6212 **AAE** - White
SP6212 **AA S** - Satin
SP6212 **AA N** - Black
SP6212 **AA T** - Cor-ten

F - 2700K
5 - 3000K
9 - 4000K
0 - 5000K
1 - blue

includes 4.92 ft neoprene cable
H05RN-F 2x0.35/0.75 Ø0.25 in
1 - 16.40 ft
2 - 32.81 ft
3 - 49.21 ft
4 - 65.62 ft

asymmetrical

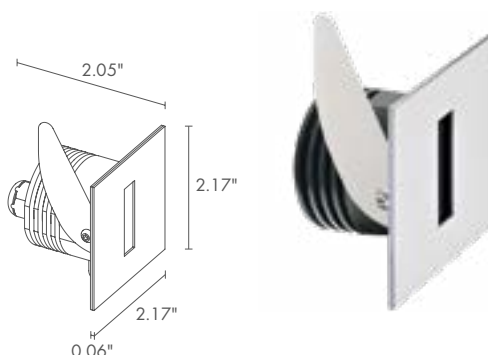

STEP OUTSIDE 6.3

Ø 2.76 in
H 3.54 in
Ø 1.77 in

LED TECH
0.53 lbs IP65
IPS CASAMBI

2W 500mA

SP6312 **AAE** - White
SP6312 **AA S** - Satin
SP6312 **AA N** - Black
SP6312 **AA T** - Cor-ten

F - 2700K
5 - 3000K
9 - 4000K
0 - 5000K
1 - blue

includes 4.92 ft neoprene cable
H05RN-F 2x0.35/0.75 Ø0.25 in
1 - 16.40 ft
2 - 32.81 ft
3 - 49.21 ft
4 - 65.62 ft

asymmetrical

145 lm (3000K, 500mA)

42 lm (3000K, 500mA)

1 power LED
1/4 ANSI BIN (white LED color)
50000h L90 B10 (Ta 25°C)

body in aluminum, cover in stainless steel
lens in transparent plexiglass

remote power supply required, not included

series

recessed (wall)

see accessories page

certified ETL version available on request

145 lm (3000K, 500mA)

25 lm (3000K, 500mA)

1 power LED
1/4 ANSI BIN (white LED color)
50000h L90 B10 (Ta 25°C)

body in aluminum, cover in stainless steel
lens in transparent plexiglass


remote power supply required, not included

series



recessed (wall)

see accessories page

certified ETL version available on request







STEP OUTSIDE 7.0

LED TECH 0.44 lbs IP65



POWER / MODEL CODE

3.5W 24VDC
SP7000 A W White - White
SP7000 A E White - Stainless steel
SP7000 A F Grey - Stainless steel
SP7000 A H Anthracite - Stainless steel
SP7000 A T Cor-ten - Stainless steel



LED COLOR

5 - 3000K
9 - 4000K
0 - 5000K

OPTICS

diffuse

LUMEN OUTPUT AT SOURCE	107 lm (3000K)
DELIVERED LUMEN OUTPUT	56 lm (3000K)
NO. AND TYPE OF LED	1 power LED 1/4 ANSI BIN, 50000h L90 B10 (Ta 25°C)
MATERIAL	body in die-cast aluminum screen in transparent polycarbonate
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	includes 2x0.98 ft single-core cables
MOUNTING	surface mounted (wall)
ACCESSORIES	see accessories page
NOTES	certified ETL version available on request

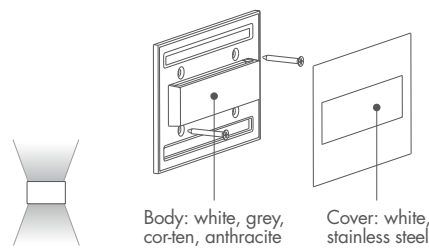

STEP OUTSIDE 8.0

LED TECH 0.49 lbs IP65



POWER / MODEL CODE

3.5W 24VDC
SP8000 A W White - White
SP8000 A E White - Stainless steel
SP8000 A F Grey - Stainless steel
SP8000 A H Anthracite - Stainless steel
SP8000 A T Cor-ten - Stainless steel

5 - 3000K
9 - 4000K
0 - 5000K

diffuse

LUMEN OUTPUT AT SOURCE	214 lm (3000K)
DELIVERED LUMEN OUTPUT	16 lm (3000K)
NO. AND TYPE OF LED	1 power LED 1/4 ANSI BIN, 50000h L90 B10 (Ta 25°C)
MATERIAL	body in die-cast aluminum screen in transparent polycarbonate
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	includes 2x0.98 ft single-core cables
MOUNTING	surface mounted (wall)
ACCESSORIES	see accessories page
NOTES	certified ETL version available on request





ACCESSORIES

ACCESSORIES
FOR INSTALLATION**WC0202**

Outer casing

(Step Outside 2.0 /
2.1 / 2.6 / 2.7)**WC1501**

Outer casing

(Step Outside 5.1 / 5.2 /
6.1 / 6.2 / 6.3)**WC0301**


Optional outer casing

(Step Outside 7.0 / 8.0)

POSITIONING DIAGRAMS


STEP OUTSIDE 2.0 / 2.1 / 2.6 / 2.7

D - Diffuse

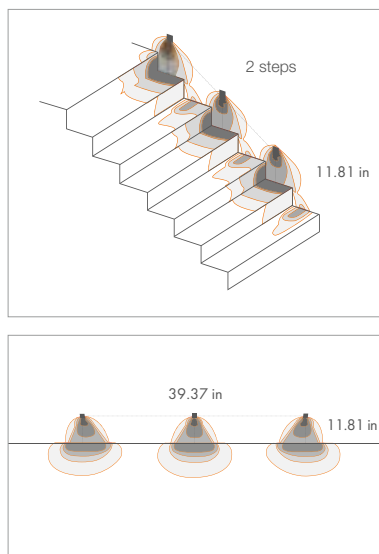


STEP OUTSIDE 5.1

A - Asymmetrical

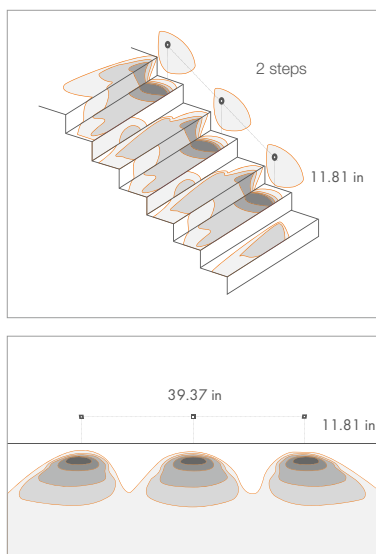


STEP OUTSIDE 5.2

A - Asymmetrical

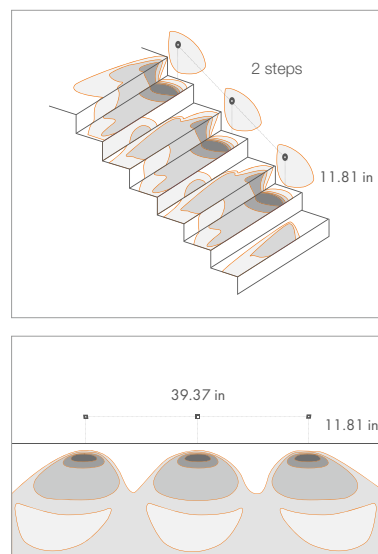


STEP OUTSIDE 7.0

A - Diffuse

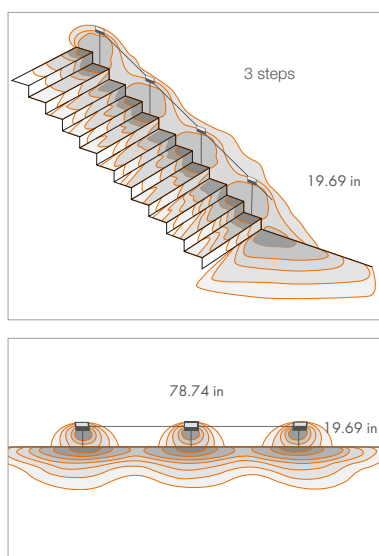

STEP OUTSIDE 8.0


A - Diffuse

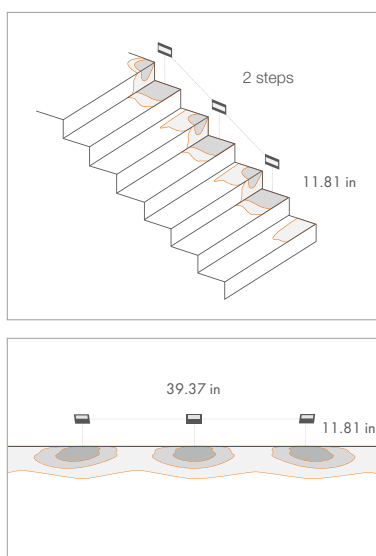

POSITIONING DIAGRAMS


STEP OUTSIDE 6.1

A - Asymmetrical

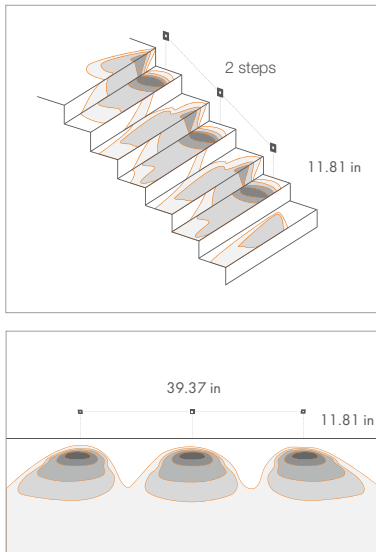


STEP OUTSIDE 6.2

A - Asymmetrical

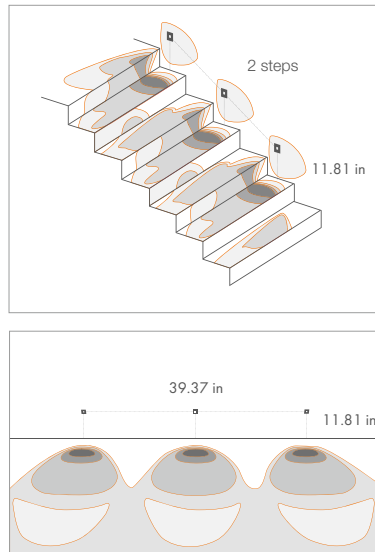

STEP OUTSIDE 6.3


A - Asymmetrical

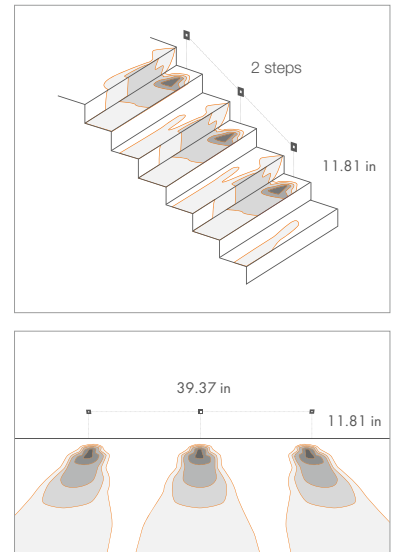




STEP OUTSIDE 2.0 2.1 2.6 2.7

D - Diffuse

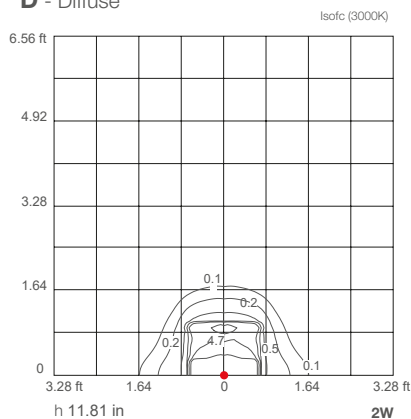


STEP OUTSIDE 5.1

A - Asymmetrical

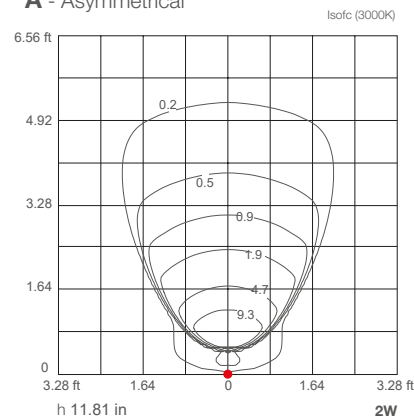


STEP OUTSIDE 5.2

A - Asymmetrical

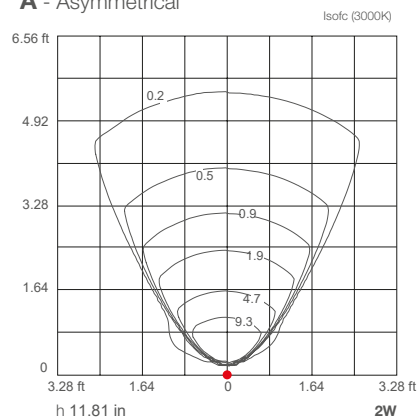


STEP OUTSIDE 6.1

A - Asymmetrical

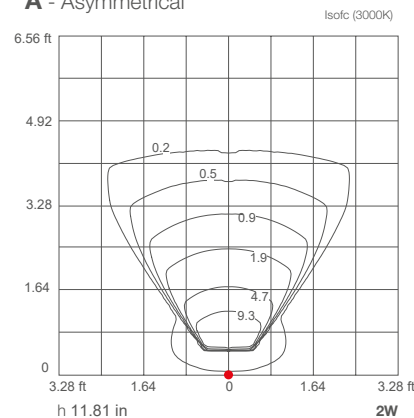


STEP OUTSIDE 6.2

A - Asymmetrical


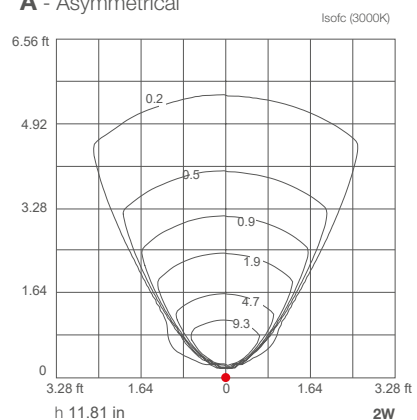


STEP OUTSIDE 6.3

A - Asymmetrical

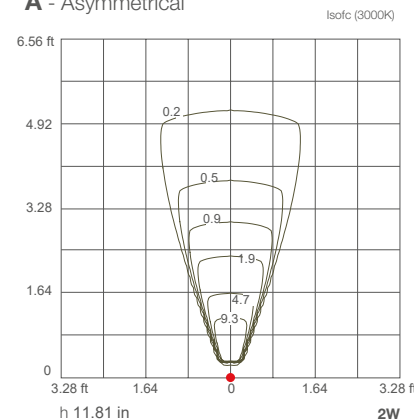

STEP OUTSIDE 7.0

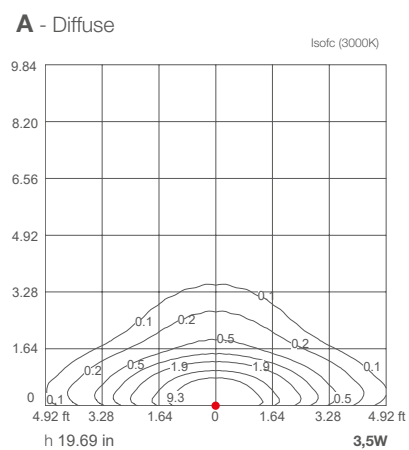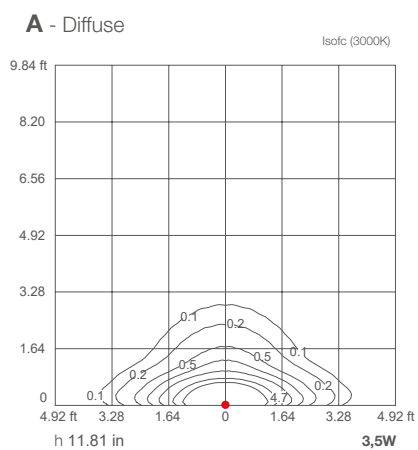

STEP OUTSIDE 8.0

